

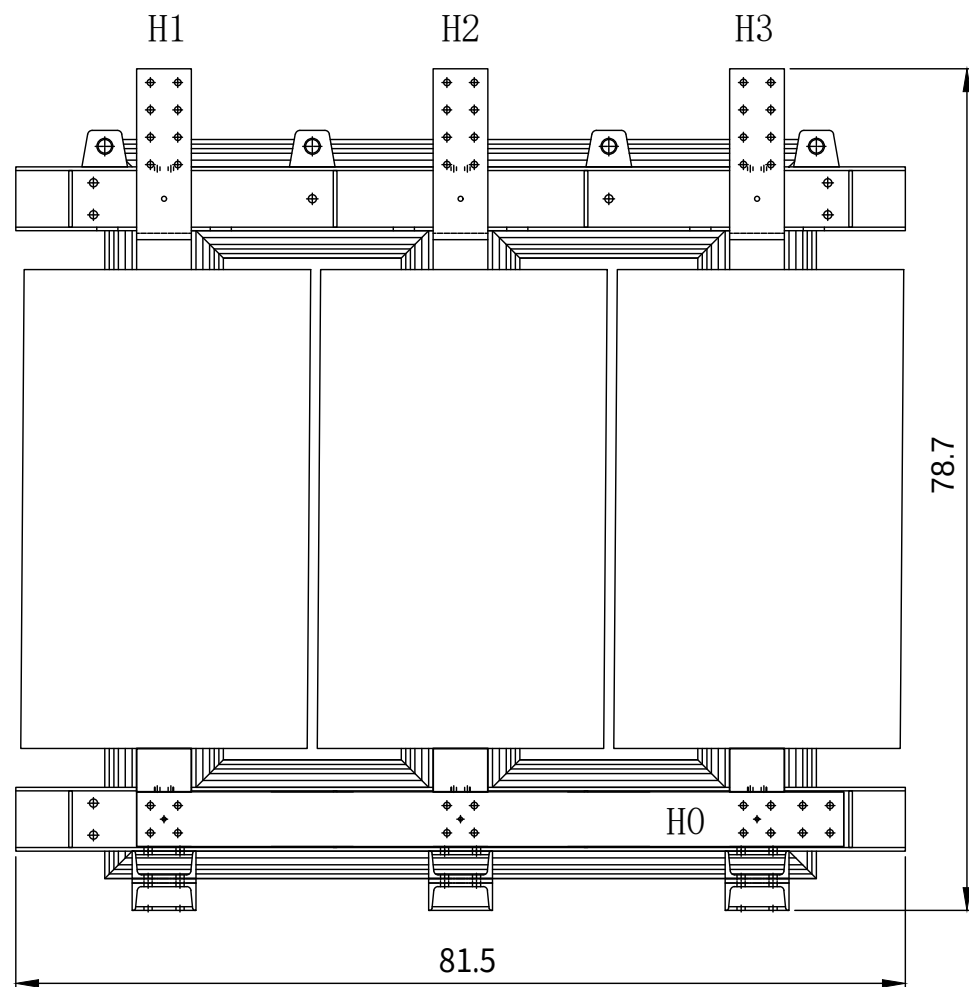
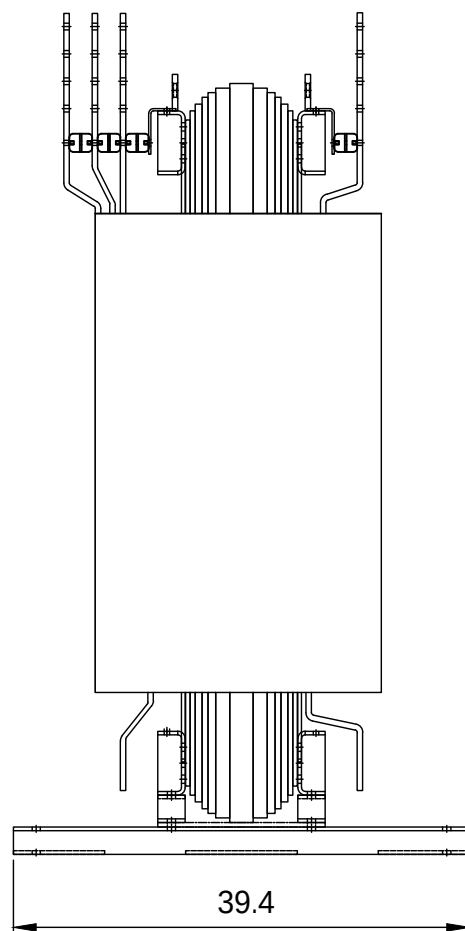
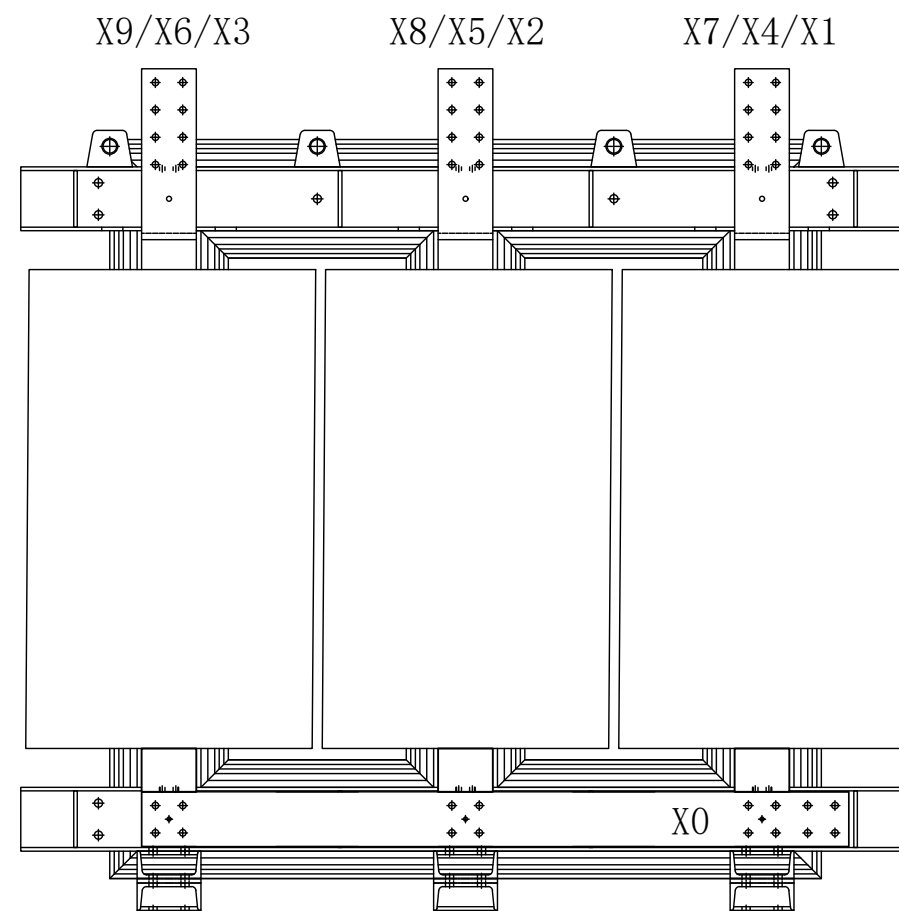
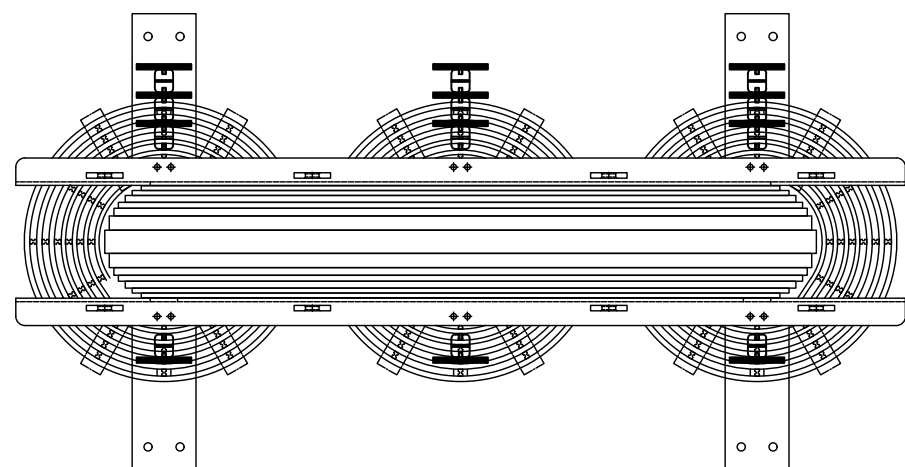


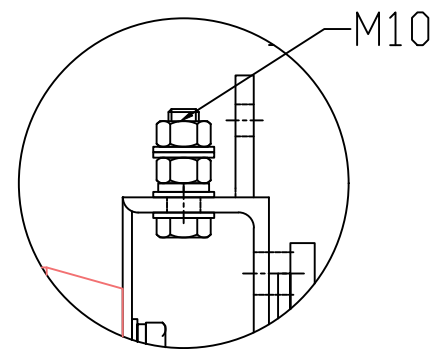

Grounding bolt

Phase	3	Frequency	60Hz
Capacity	2000KVA		
Input	690VAC		
Output	400V 480V 690V		
Vector	Y/y		
Weight	12566.14Lbs		

X1-X2-X3:400V
X1-X2-X3:480V
X1-X2-X3:690V

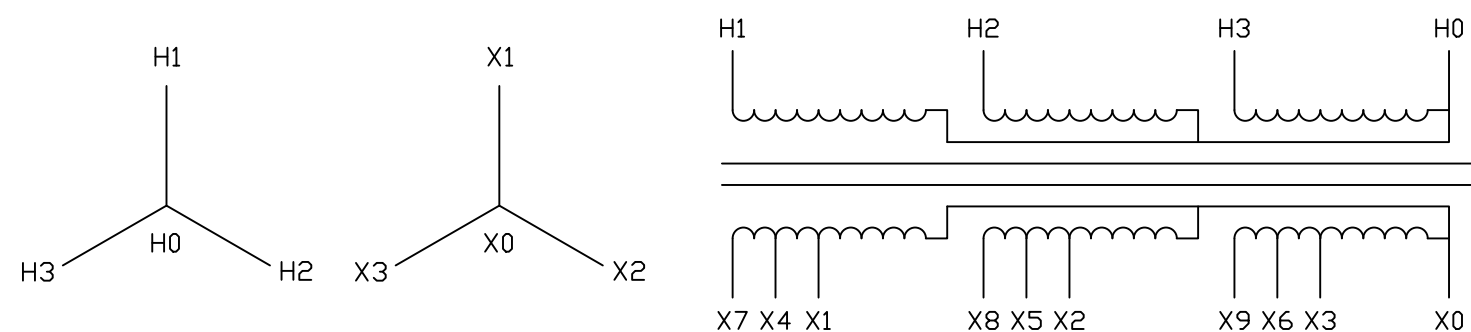

2000KVA 690V-400V 480V 690V DOE	Dry type transformer /
K-13 Insulation: 220°C, Temperature Rise: 150°C	

