

REV	DESCRIPTION	DATE
A	QUOTE	07/01/2026

MPD-CW11-BS.70AB-DE45YT-HZ-2.E28-2.C04-8.N10-M1

LARSON ELECTRONICS®

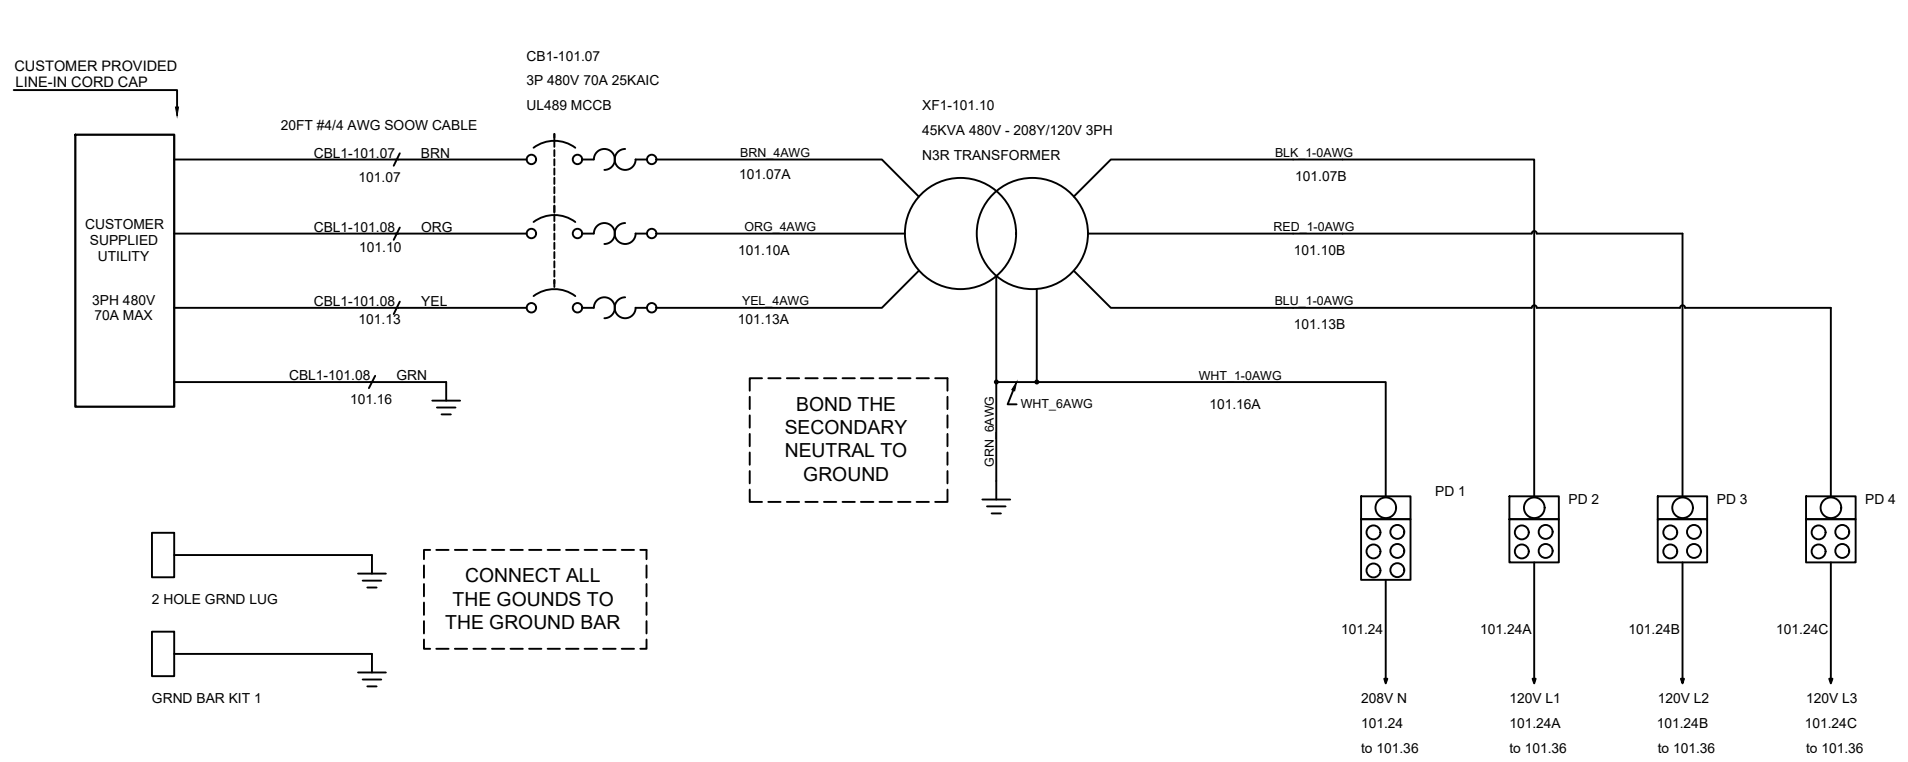


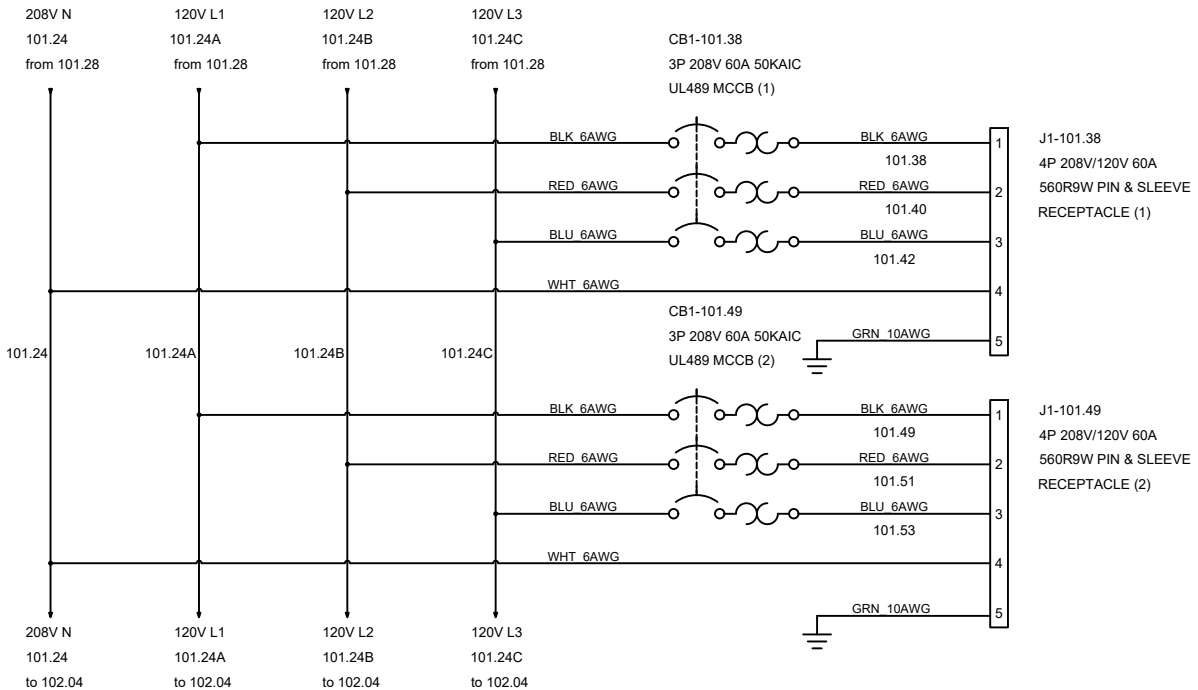

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-CW11-BS.70AB-DE45YT-HZ-2.E28
-2.C04-8.N10-M1

DRAWN BY	DATE	REV
L.Calib	07-01-2026	A
CHECKED BY	SHEET #	DRAWING #
	1 OF 3	101

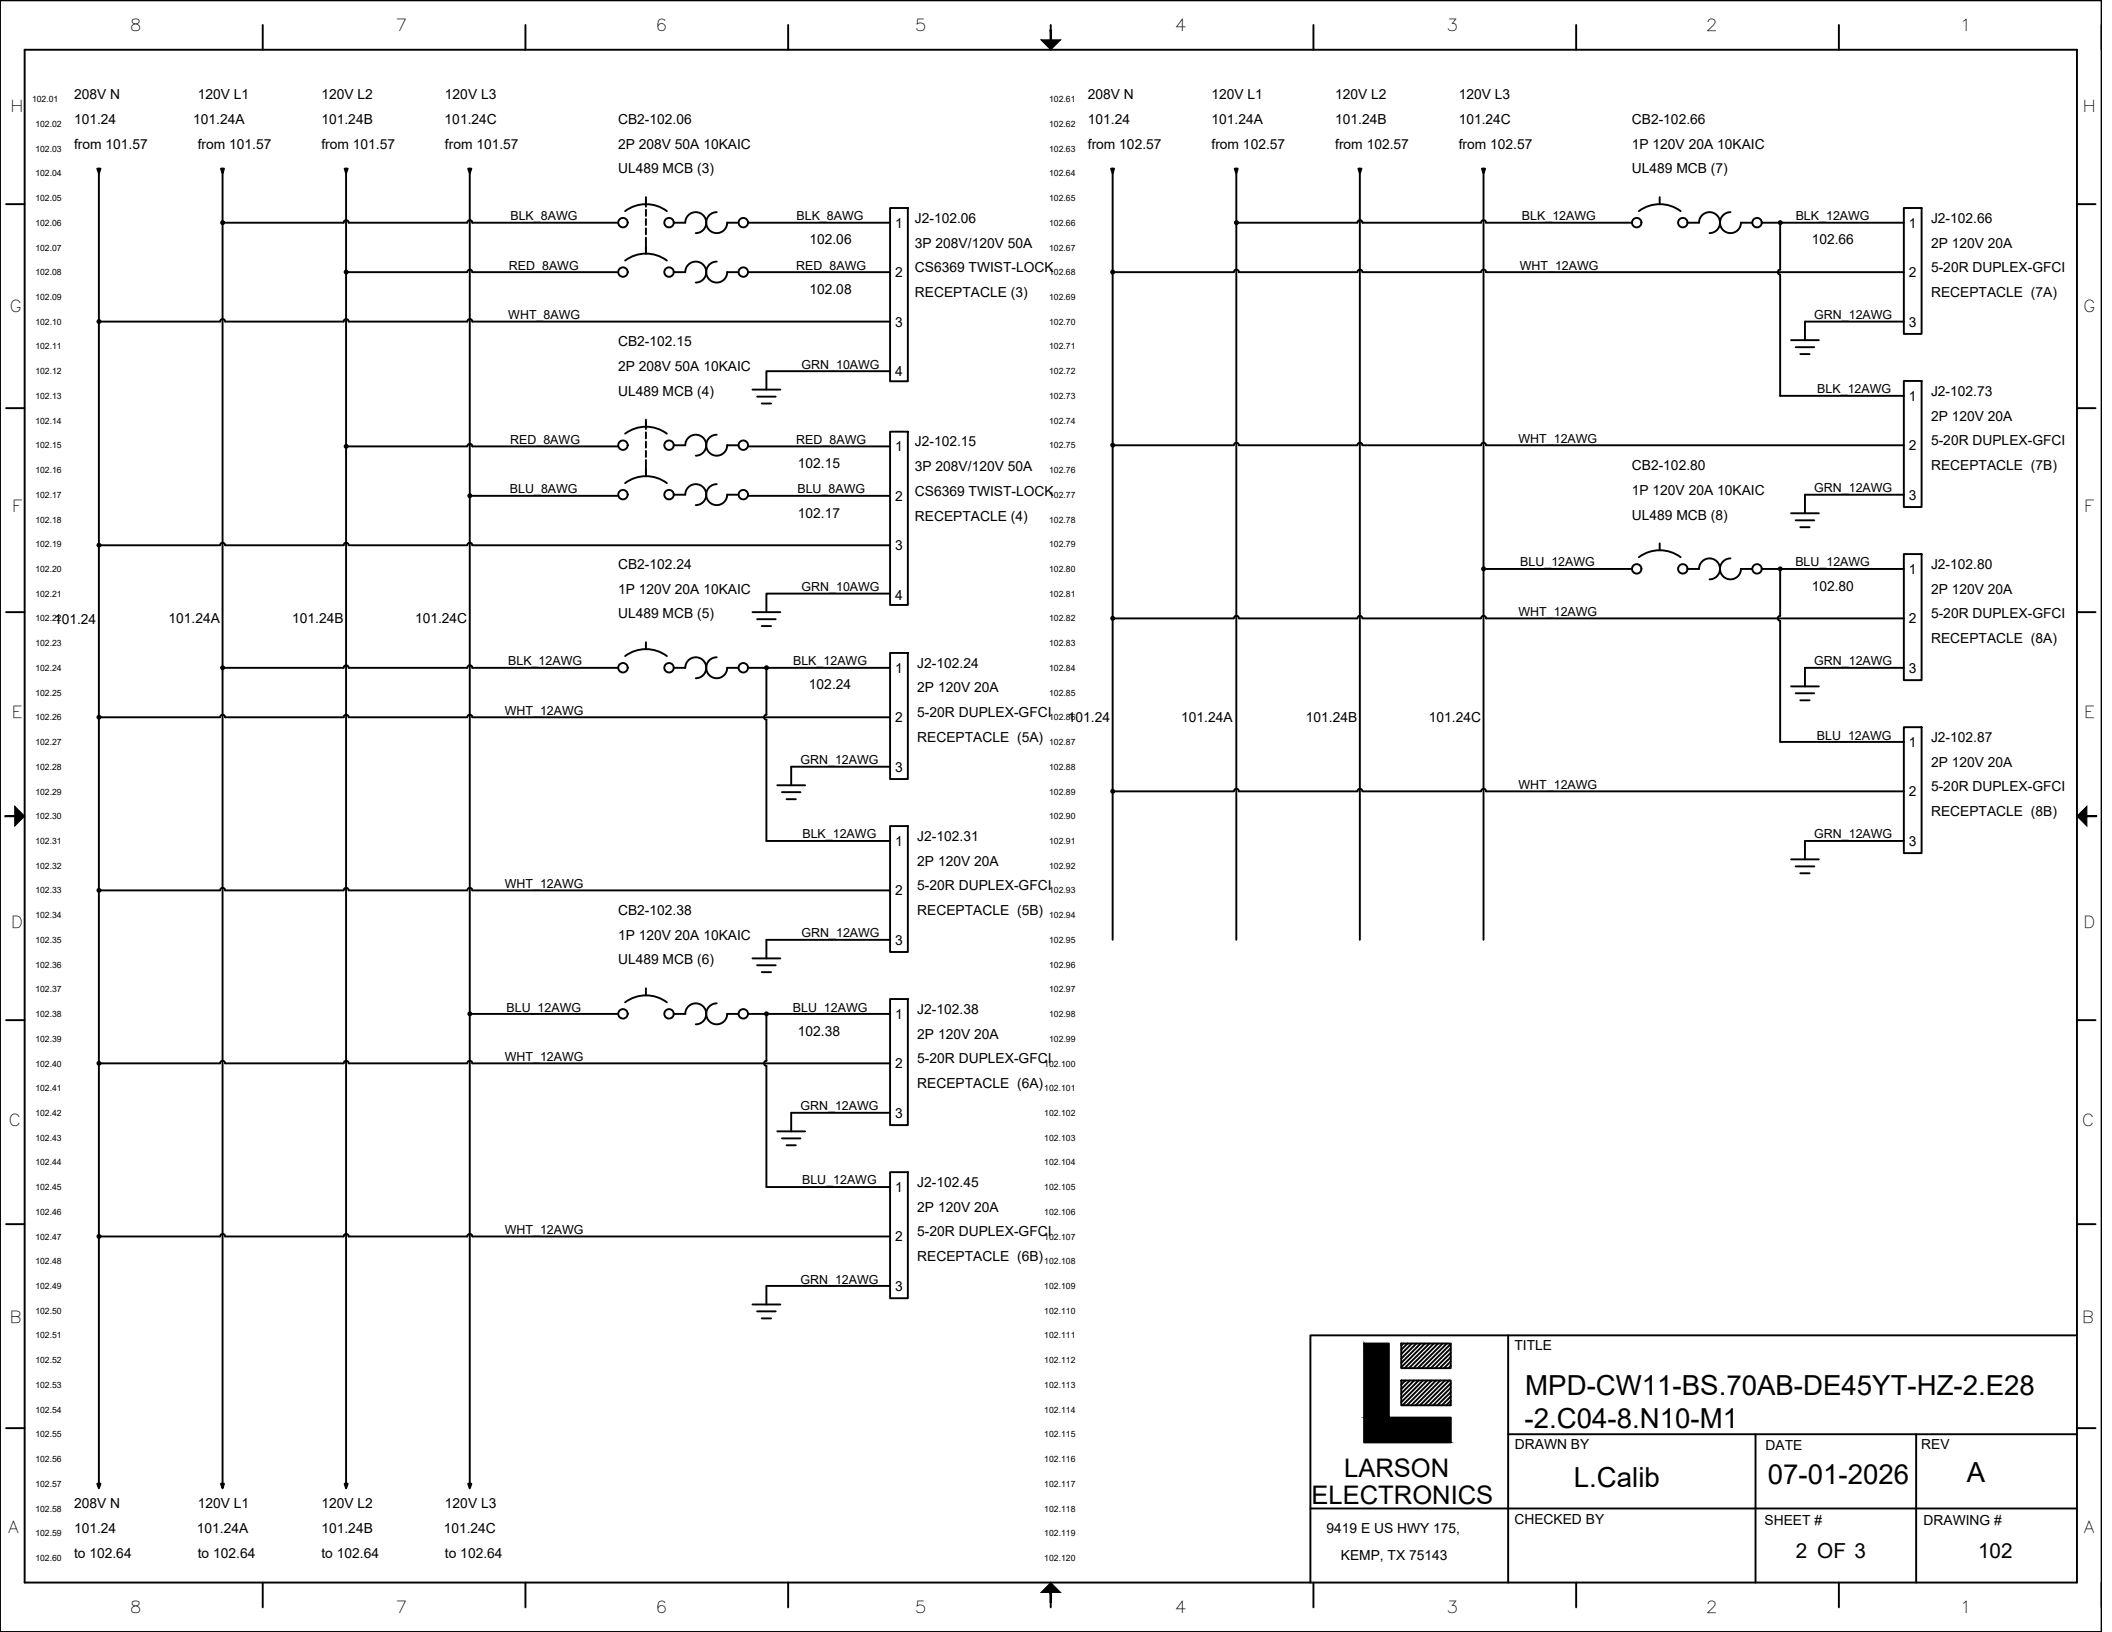

LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE		
MPD-CW11-BS.70AB-DE45YT-HZ-2.E28-2.C04-8.N10-M1		
DRAWN BY: L.Calib	DATE: 07-01-2026	REV: A
CHECKED BY:	SHEET #: 2 OF 3	DRAWING #: 102

TAGS	QTY	CATALOG	DESCRIPTION
J2-102.06 J2-102.15	2	UNV00008818	CS6369 50A 250V 3P RECEPTACLE
2 HOLE GRND LUG	1	UNV00007136	2 HOLE GROUND LUG
J1-101.38 J1-101.49	2	UNV00005561	3P 208Y/120V 60A PIN AND SLEEVE 560R9W RECEPTACLE
J2-102.24 J2-102.31 J2-102.38 J2-102.45 J2-102.66 J2-102.73 J2-102.80 J2-102.87	8	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
CB2-102.06 CB2-102.15	2	UNV00014731	2P 250V 50A DIN RAIL MOUNT MCCB UL489
CB1-101.07	1	UNV00015179	3P 250/480V 70A UL489 65KA MCCB
CB1-101.38 CB1-101.49	2	UNV00015180	3P 60A 600V UL489 MCCB
CB2-102.24 CB2-102.38 CB2-102.66 CB2-102.80	4	UNV00017491	1P 125V 20A 10KA UL489 DIN RAIL MOUNT BREAKER
PD 1	1	UNV00016633	POWER DISTRIBUTION BLOCK 380A 1-6 OPENING
PD 2 PD 3 PD 4	3	UNV00015084	POWER DISTRIBUTION BLOCK 175 A 600V 1-4 OPENING
GRND BAR KIT 1	1	UNV00013942C	GROUND BAR KIT
CBL1-101.07	1	UNV00008740	4/4 SOOW CABLE
XF1-101.10	1	UNV00009054	3P 45KVA 480V-208/120V N3R 60HZ TRANSFORMER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-CW11-BS.70AB-DE45YT-HZ-2.E28-2.C04-8.N10-M1

DRAWN BY	DATE	REV
L.Calib	07-01-2026	A
CHECKED BY	SHEET #	DRAWING #
	3 OF 3	103