


# MT-PML-R7-1P-GMP-75KVA-SZ-LT-DF-A6-BM-CZ-2B4-M1

Weight sheet: lbs


| Body weight | Oil | Total |
|---|---|---|
| 584 | 661 | 1499 |

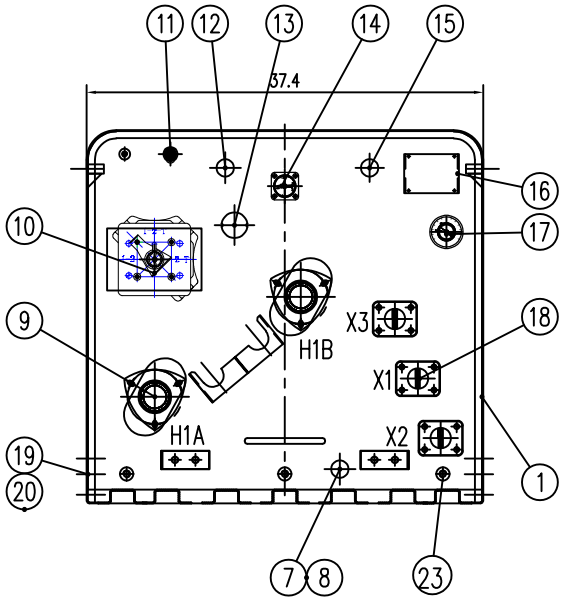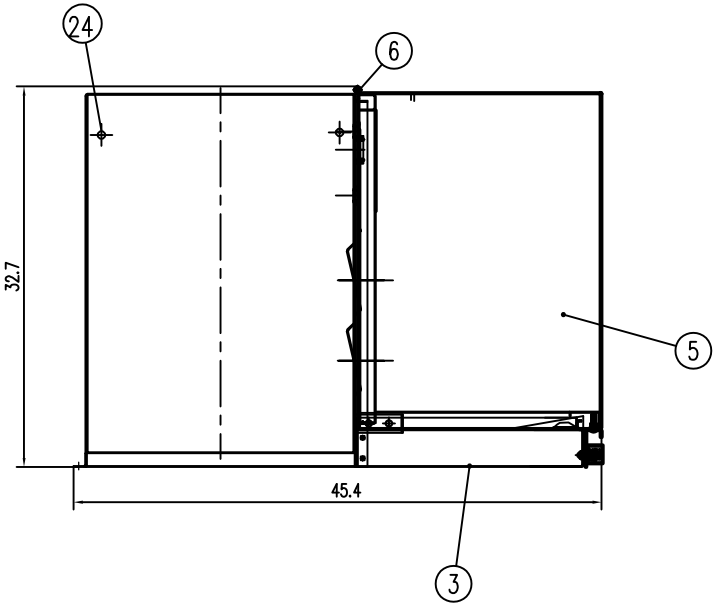


wiring diagram

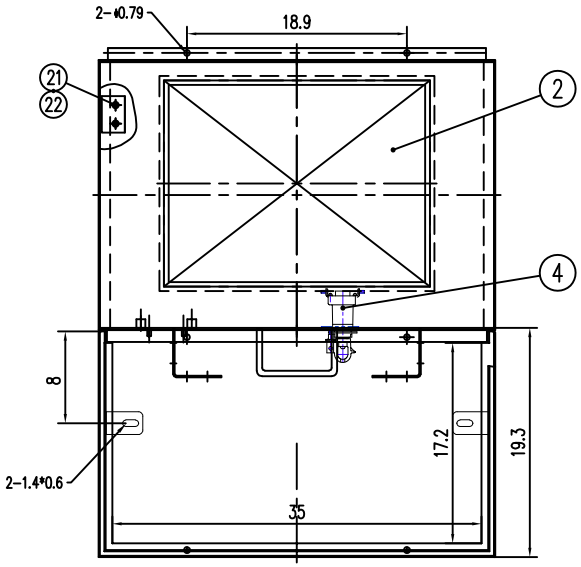


| NO | Code | Name | QTY | Material | Unit Weight | Total Weight | Remark |
|---|---|---|---|---|---|---|---|
| 24 | | lifting lug | 4 | | | | |
| 23 | | grounded nut | 2 | | | | |
| 22 | | current limiting fuse | 1 | | | | |
| 21 | | fuse holder | 2 | | | | |
| 20 | | nut M8 | 4 | | | | |
| 19 | | bolt M8X25 | 4 | | | | |
| 18 | | LV bushing | 3 | | | | 4-hole Single raw spade |
| 17 | | thermometer | 1 | | | | |
| 16 | | nameplate | 1 | | | | |
| 15 | | pressure indicator | 1 | | | | |
| 14 | | oil level indicator | 1 | | | | |
| 13 | | bayonet fuse | 1 | | | | |
| 12 | | oil filler plug | 1 | | | | |
| 11 | | Pressure relief valve | 1 | | | | |
| 10 | | 4position loadbreak | 1 | | | | |
| 9 | | HV bushing | 2 | 200A loadbreak | | | with (1) arrester |
| 8 | | insulation oil | 1 | mineral oil | | | |
| 7 | | drain valve | 1 | | | | |
| 6 | | hinge axis | 2 | | | | |
| 5 | | tank cover | 1 | | | | |
| 4 | | tap changer switch | 1 | | | | |
| 3 | | tank base | 1 | | | | |
| 2 | | coverplate | 1 | | | | |
| 1 | | tank | 1 | | | | |
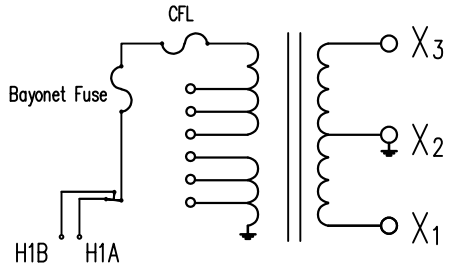
| Mark | Revise | Revision | Signature | Date |
|---|---|---|---|---|
| Designed | | Standard | | |
| Checked | | Examined | | |
| Audited | | Approved | | |
| Crafted | | Date | | |

Pad Mounted TR

13800GrdY/7968V
240/120V, 116, 75kVA

| pattern mark | mass | scale |
|---|---|---|
| | | 1:8 |
| page | 0 | page |

LARSON ELECTRONICS

| |
|---|
| Scan |
| Checked |
| 0 |
| Signature |
| Date |

Remark: dimensions here are in inches.Only for approval/preliminary design..