


MT-PML-R7-3P-DMT-1MVA-YE-LT-DF-A6-BF-CS-2C6-M2


Approx. Weight: 6834LBS.

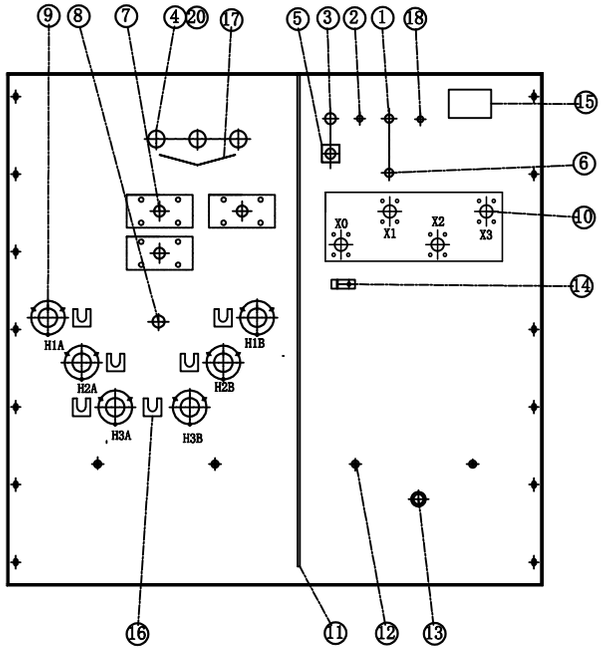

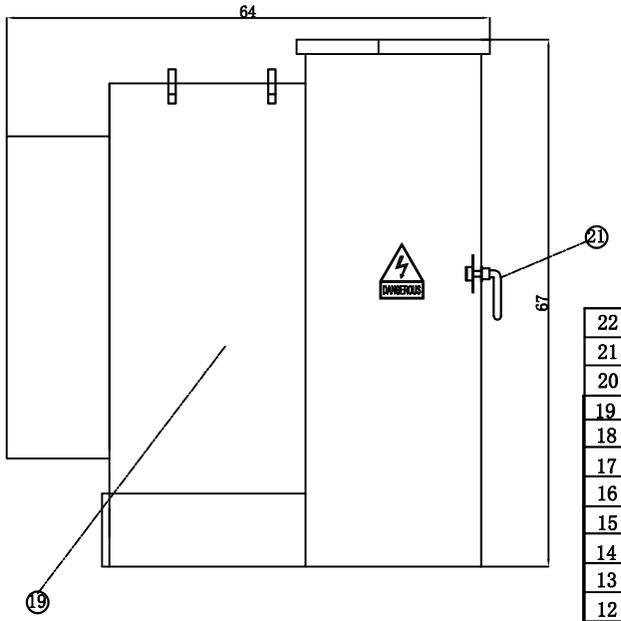


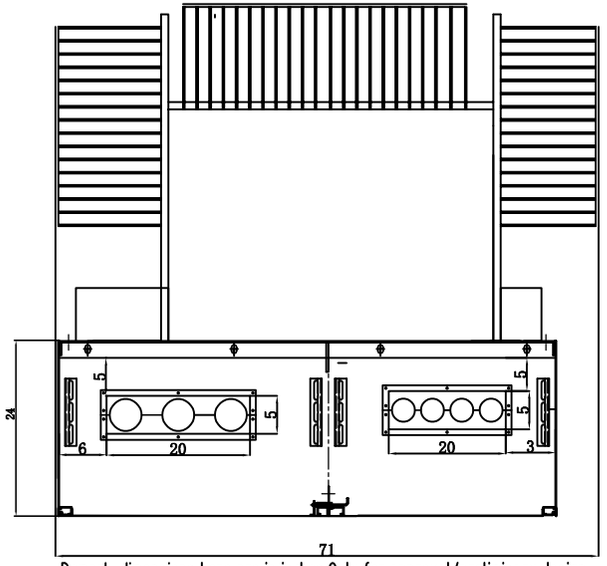

Remark: dimensions here are in inches.Only for approval/preliminary design..

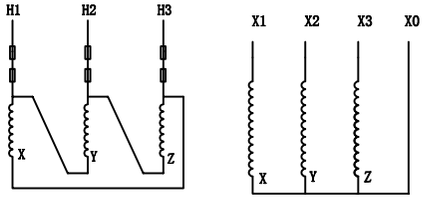

WIRING CONNECTION



PHASOR DIAGRAM

No.	Name	Model	QTY	Material	Remark
22	tank&house		1	304SS	
21	padlock		1		
20	current limting fuse		3		with Bayonet fuse
19	insulation oil		oil		
18	gas sample valve		1		Schrade Valve
17	drip shield		1		
16	parking stand		6		
15	nameplate		2		
14	grounding strap		1		
13	drain valve w/sampler		1		
12	grouding lug		4		with copper bar
11	reinforcing rib		1		
10	LV bushing		4		6-hole spade
9	HV bushing		6	dead break	with (3) arrester
8	off-circuit tap changer		1		
7	load break switch		3		2 position
6	temperature indicator		1		
5	oil indicator		1		
4	Bayonet fuse		3		w/flapper valve
3	oil fill valve		1		
2	pressure relief valve		1	combined	with fault indicator
1	pressure indicator		1		

mark	revise	revision	signature	date
designed			standard	
checked			examined	
audited			approved	
crafted			date	

1000kVA, 60Hz, KNAN,
12000V,Delta Pri.,
480Y/277V, Wye-N

3P Pad Mounted Transformer

pattern mark				weight	scale

total page	page

LARSON ELECTRONICS