Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Product ID: 299159

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image:

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-UPM-R7-1P-GMA-100KVA-SZ-AE-B6-BM-CZ-2Z2-M4 Pole Mount Overhead Transformer

Phase: Single Phase
Capacity: 100 KVA
Primary Voltage: 34500/19920 GrdY Grounded Wye (2 Wire)
Primary BIL: 200 kV
Secondary Voltage: 120/240V (L-L-N)
Secondary BIL: 30 kV
Frequency: 60 Hz
Temperature Rise: 65°C
Forced Air (Fans): None
Tap Changer: 5-Position Tap Changer, +/- 2.5% Taps, 2 FCBN, 2 FCAN
Primary Bushing: Double Bushing
Secondary Bushing: -
Well Bushings w/ Inserts: -
Efficiency: -
Insulation Fluid: Mineral Oil - Non PCB Fluid
Fluid Capacity: -
Oil Level Marking: Internal
Cooling Class: ONAN
Liquid Level Gauge: -
Temperature Gauge: -
Pressure/Vacuum Gauge: -
Pressure Relief Device: Automatic
Fill Valve: Included

Ratings

Conforms to ANSI / IEEE Standard C57.12.20
Lifting Lugs Included

Drain Valve w/ Sampler: -
Surge Arrestors: Lightning Arrestor on H1 Primary Terminal
Surge Arrestor Mounting Provision: None
Secondary Lugs Mounting Provision: (2) 4/0 Lugs per Terminal, 4-Hole Spade Terminal
Allows for Mounting Lugs
Protection Fuses: -
Load Break Switch: N/A
Front: -
Feed: -
No Load Loss: 210W
Full Load Loss: 850W
Efficiency @ 100% Load: 98.95%
Impedance (approx): 3%
Winding Material: Copper
Core Material: Grain Oriented Steel
Terminals: Tin Plated Primary and Secondary - Accepts Copper or Aluminum Connections
Ambient Temperature Rating: -
Housing: Coated Steel w/ Corrosion Resistant Cover Band, Removable Top Cover
Paint Type: White
Mounting: Pole Mount via Hangar Brackets
Lifting Lugs: Included
Grounding: Tank Grounding Provisions
Dimensions: 32.3" x 37.4" x 67.1"
Weight: 1,962 lb

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-UPM-R7-1P-GMA-100KVA-SZ-BE-A6-BM-CZ-2ZZ-M4 Pole Mount Distribution Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in outdoor and public locations. The low operating costs, low heat emissions and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. This power distribution system is designed for overhead, pole mount installations and use.

Transformer Features: With a transformer rating of 100 kVA, the industrial transformer features a primary voltage of single-phase 34500/19920 Grounded Wye (2 wire) and a secondary voltage of single-phase 120/240V (L-L-N). This pole mount transformer features two bushings on the primary side and mounting provisions for two 4/0 lugs per terminal on the secondary side (4-hole Nema pads terminal allows for mounting lugs). Equipped with copper windings and a grain oriented steel core, this single-phase transformer consists of one coil and two core loops. Tin plated terminals on the primary and secondary side accepts copper or aluminum connections. The transformer features a 5-position tap changer with +/- 2.5% taps to allow small changes for voltage.

The MT-UPM-R7-1P-GMA-100KVA-SZ-BE-A6-BM-CZ-2ZZ-M4 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-UPM-R7-1P-GMA-100KVA-SZ-BE-A6-BM-CZ-2ZZ-M4 features mineral oil insulation fluid. Internal marking is available for proper oil level monitoring. We offer transformers with FR-3 oil fluid, if needed.

Gauges: There are no gauges on this transformer. We can add liquid level, temperature and

pressure/vacuum gauges at an additional cost. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types.

Pressure Relief Device: An automatic pressure relief device is included with this transformer.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with a lightning arrestor on the H1 primary terminal. There are no mounting provisions for a second arrestor. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.

Load Breaker Switch: The MT-UPM-R7-1P-GMA-100KVA-SZ-AE-B6-BM-CZ-2Z2-M3 is equipped with a load break switch. This switch has two positions.

Valves: The MT-UPM-R7-1P-GMA-100KVA-SZ-AE-B6-BM-CZ-2Z2-M3 is not equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer does not contain fuses or circuit breakers. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for and outdoor applications. Equipped with hangar brackets and lifting lugs, this overhead power distribution system can be mounted on poles.

Benefits: The MT-UPM-R7-1P-GMA-100KVA-SZ-AE-B6-BM-CZ-2Z2-M3 heavy-duty transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

We offer completely self protected (CSP) pole mount overhead transformers at an additional cost.

Applications: General purposes, industrial sites, electrical rooms, public locations, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

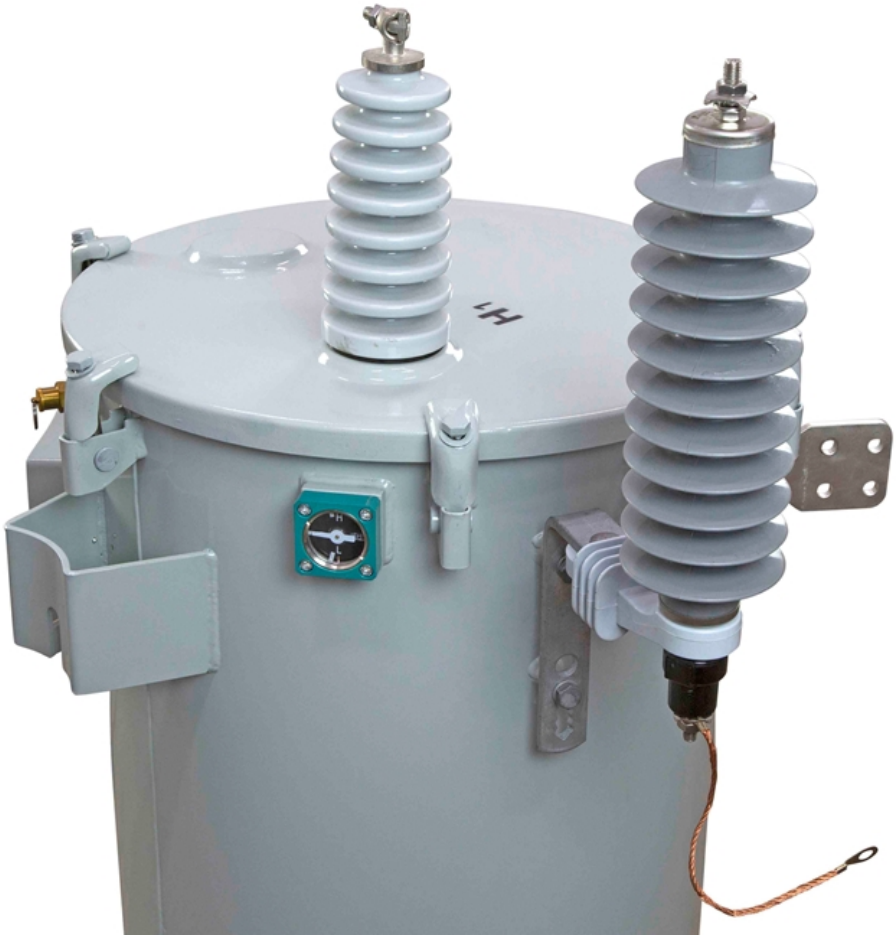


Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Product ID: 299159

Export Control Classification Number (ECCN): EAR99

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Links (Click on the below items to view):

- **Operations Manual**(https://www.larsonelectronics.com//images/product/Manual/299159.PDF)
- **HigResPic1**(https://www.larsonelectronics.com//images/product/HigResPic1/299159.JPG)
- **HigResPic2**(https://www.larsonelectronics.com//images/product/HigResPic2/299159.JPG)
- **HigResPic3**(https://www.larsonelectronics.com//images/product/HigResPic3/299159.JPG)
- **HigResPic4**(https://www.larsonelectronics.com//images/product/HigResPic4/299159.JPG)
- **HigResPic5**(https://www.larsonelectronics.com//images/product/HigResPic5/299159.JPG)
- **HigResPic6**(https://www.larsonelectronics.com//images/product/HigResPic6/299159.JPG)
- **HigResPic7**(https://www.larsonelectronics.com//images/product/HigResPic7/299159.JPG)
- **HigResPic8**(https://www.larsonelectronics.com//images/product/HigResPic8/299159.JPG)
- **HigResPic9**(https://www.larsonelectronics.com//images/product/HigResPic9/299159.JPG)
- **Video1**(https://www.youtube.com/watch?v=rrNaoWova7o)
- **Video2**(https://www.youtube.com/watch?v=WDz5E0sX1Ws)
- **ISO 9001 Certification**(http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate**(https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map**(https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)