

MPD-ATS-40A-120V-1PH-304SS-N4X

40-amp Automatic Transfer Switch - 120V 1PH - 304 Stainless Steel - NEMA 4X

Product ID: 341467

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MPD-ATS-40A-120V-1PH-304SS-N4X

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-ATS-40A-120V-1PH-304SS-N4X Automatic Transfer Switch

Unit Type: Automatic Transfer Switch, 2-Source, 1-Load

Dimensions: 20" x 14.6" x 7.09"

Weight: 20 lbs

Voltage: 120V 1PH, 2-Wire, 2-Pole

Current Rating: 40 A

Withstand and Close-On Rating: 100 kA spc/10 kA (0.025 sec.)

Load Transition Type (Automatic): Open Transition

Enclosure Rating/Material: NEMA 4X, 304 Stainless Steel

Finish: Electrostatically Applied and Baked Powder Paint

Mount: Wall or Surface, via (4) Screw Holes

Lug Range: 1/0 - #14

Features/Ratings

Listed for Use in United States

NEMA 4X, 304 Stainless Steel

Digital Power Technology (DPM)

10,000 Amps Withstand Rating

NRTL Certified to UL 1008

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-765-7664

Larson Electronics manufacture a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being one-time custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

E-mail: sales@larsonelectronics.com

Made in the USA

The MPD-ATS-40A-120V-1PH-304SS-N4X from Larson Electronics is an Automatic Transfer Switch that is ideal for managing electrical loads between two sources in industrial facilities. This 40-amp, 120V single phase controller handles timing, sensing, exercise functions, and transfer commands. Constructed of 304 stainless steel, the unit is housed in a NEMA 4X enclosure.

The MPD-ATS-40A-120V-1PH-304SS-N4X offers accurate control of electrical power and loads, in locations where a backup generator or energy management system is installed. This 40-amp unit features 120V single phase compatability and an open type of load transition (automatic). The controller is designed to handle all commands related to the following: timing, sensing, exercise functions and transfers. During abnormal conditions, this unit can withstand a maximum of 10,000 amps.

The automatic transfer switch is constructed of aluminum with electrostatically applied and baked powder paint. Operators may mount the NEMA 4X-rated unit on compatible walls or surfaces via four screw openings located at the back of the controller.

Applications: Backup generators, power management, energy systems, industrial facilities, commercial spaces, and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.



Frequently Asked Questions (FAQ)

There are no Fags



Image: MPD-ATS-40A-120V-1PH-304SS-N4X



Image: MPD-ATS-40A-120V-1PH-304SS-N4X

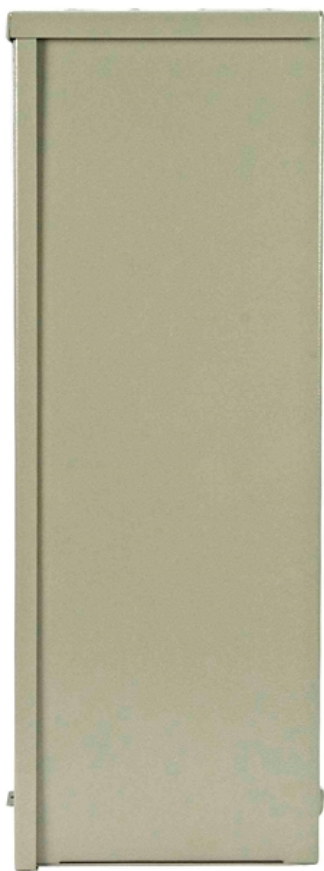


Image: MPD-ATS-40A-120V-1PH-304SS-N4X

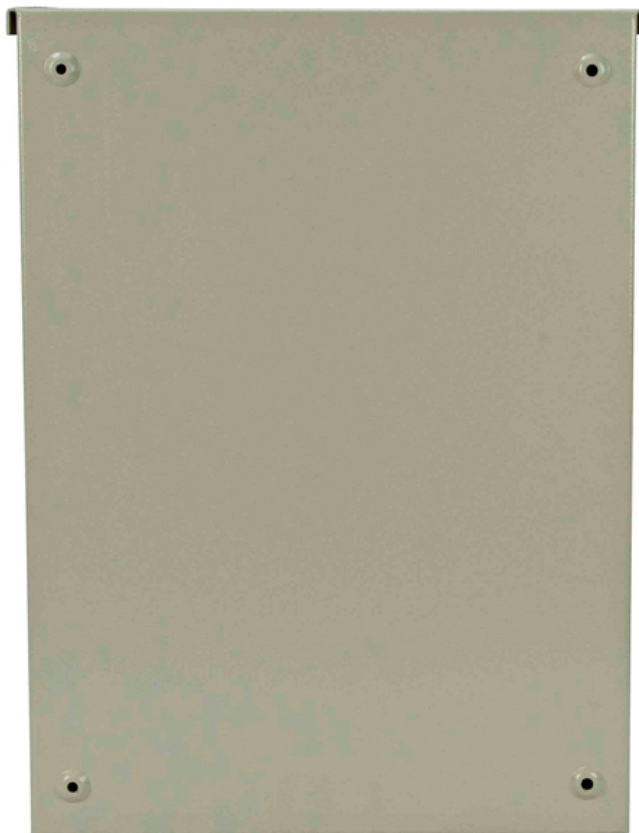


Image: MPD-ATS-40A-120V-1PH-304SS-N4X



Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **HigResPic1**(<https://www.larsonelectronics.com/images/product/HigResPic1/341467.JPG>)
- **HigResPic2**(<https://www.larsonelectronics.com/images/product/HigResPic2/341467.JPG>)
- **HigResPic3**(<https://www.larsonelectronics.com/images/product/HigResPic3/341467.JPG>)
- **HigResPic4**(<https://www.larsonelectronics.com/images/product/HigResPic4/341467.JPG>)
- **HigResPic5**(<https://www.larsonelectronics.com/images/product/HigResPic5/341467.JPG>)
- **HigResPic6**(<https://www.larsonelectronics.com/images/product/HigResPic6/341467.JPG>)
- **HigResPic7**(<https://www.larsonelectronics.com/images/product/HigResPic7/341467.JPG>)
- **HigResPic8**(<https://www.larsonelectronics.com/images/product/HigResPic8/341467.JPG>)
- **HigResPic9**(<https://www.larsonelectronics.com/images/product/HigResPic9/341467.JPG>)
- **ISO 9001 Certification**(<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate**(<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map**(<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)