

MPD-SB09-CLP-FM-YT0YT-LZ-3.L35-12.N04-R1

100A Rack Mount Power Distribution - 208Y Input - (15) Receptacles - Camlock Input/FT

Product ID: 265160



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-SB09-CLP-FM-YT0YT-LZ-3.L35-12.N04-R1 Rack Mount Power Distribution

Line-In: (1 Set) 16 Series Female Camlocks w/ Covers [Blue, Red, Black, White, Green]

Line-Out: (1 Set) 16 Series Male Camlocks [Blue, Red, Black, White, Green] - Feed Thru, 400A Maximum

Primary Voltage: 208Y

System Amps: 100A

Secondary Voltage: 208Y/120V AC

Secondary Breakers: (3) 30A 2P [208V], (12) 15A 1P [120V]

Secondary Receptacles: (3) 30A L14-30R [125/250V], (12) 20A 5-15R Duplex [120V]

Power Monitoring: Power Indicator Lights (Input Camlocks), Power Meter LCD Monitor

Form Factor: 19" Rack mount ATA Case, Shock Mount 9RU ATA Cube w/ (2) Swivel Casters and (2) Locking Casters

Frame Materials: -

Dimensions: -

Weight: -

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Ratings

Certified for United States & Canada

NRTL Listed to UL 508A

NRTL Listed to UL 1640

NRTL Listed to CSA C22.2 No. 14

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in Texas

The Larson Electronics MPD-SB09-CLP-FM-YT0YT-LZ-3.L35-12.N04-R1 Rack Mount Power Distribution is a portable power solution designed for stages, movie sets, concerts and entertainment sites. This mobile power distribution unit provides operators the ability to safely tap into and distribute 208Y power from a variety of sources, including generators and direct grid power, found in

motion picture production.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Portable Power Distribution Purpose and Use

The MPD-SB09-CLP-FM-YT0YT-LZ-3.L35-12.N04-R1 portable power distribution system gives operators the ability to power their 208 volt and 120 volt equipment from a single system within live recording and entertainment venues. An accessible LCD monitor at the top of the unit allows highly visible monitoring of power usage and allocation during use. From equipment testing to live recording sets, these portable stations make power at busy production sites readily available and safe to use. On the primary side, operators connect 208Y line-in power using one set of 16 series female camlock inputs with covers (blue, red, black, white and green) and to one set of 16 series male camlock outputs (blue, red, black, white and green) for feed-through operation. The secondary side contains three NEMA L14-30R twist lock receptacles for 208V equipment and twelve NEMA 5-15R duplex straight blade receptacles for 120V equipment.

Operation: One set of 16 series female camlock inputs with covers (blue, red, black, white and green) brings 208Y into the primary side of the 100-amp mobile power distribution unit, which contains one set of 400-amp maximum 16 series male camlock outputs for feed-through operation. The secondary side is equipped with three 30-amp 2-pole 208V breakers protecting three 30-amp 125/250V L14-30R receptacles and twelve 15-amp 1-pole 120V breakers protecting twelve 15-amp 120V 5-15R duplex receptacles.


Protective Construction: All components are secured inside a compact 19" rack mount ATA case. This black case features side-located handles for mobility around the production or recording site. Four casters (two swivel and two locking) are available at the bottom of the power distribution unit, which allows operators to move the station easily without lifting. Dual locking casters ensure stable use and safe storage when being transferred in trucks or other large vehicles. This durable case is resistant to shock and takes on a standard design that is similar with professional recording equipment. It can withstand frequent handling around live stages and loading/unloading at outdoor locations.

Certification: All units are built in accordance to NFPA 70 (National Electric Code) and certified to UL 1640. All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.


Applications: This power distribution system is ideal for indoor or outdoor use and applications including but not limited to, movie sets, entertainment, television sets, stage lighting, studio recording, sporting events, rigging, audio and video production, concerts and motion picture production. These power distribution systems are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.

Custom Built Systems Available: Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						03/19/2021
MPD-SB09-CLP-FM-YT0YT -LZ-3.L35-12.N04-R1							
							
8	7	6	5	4	3	2	1

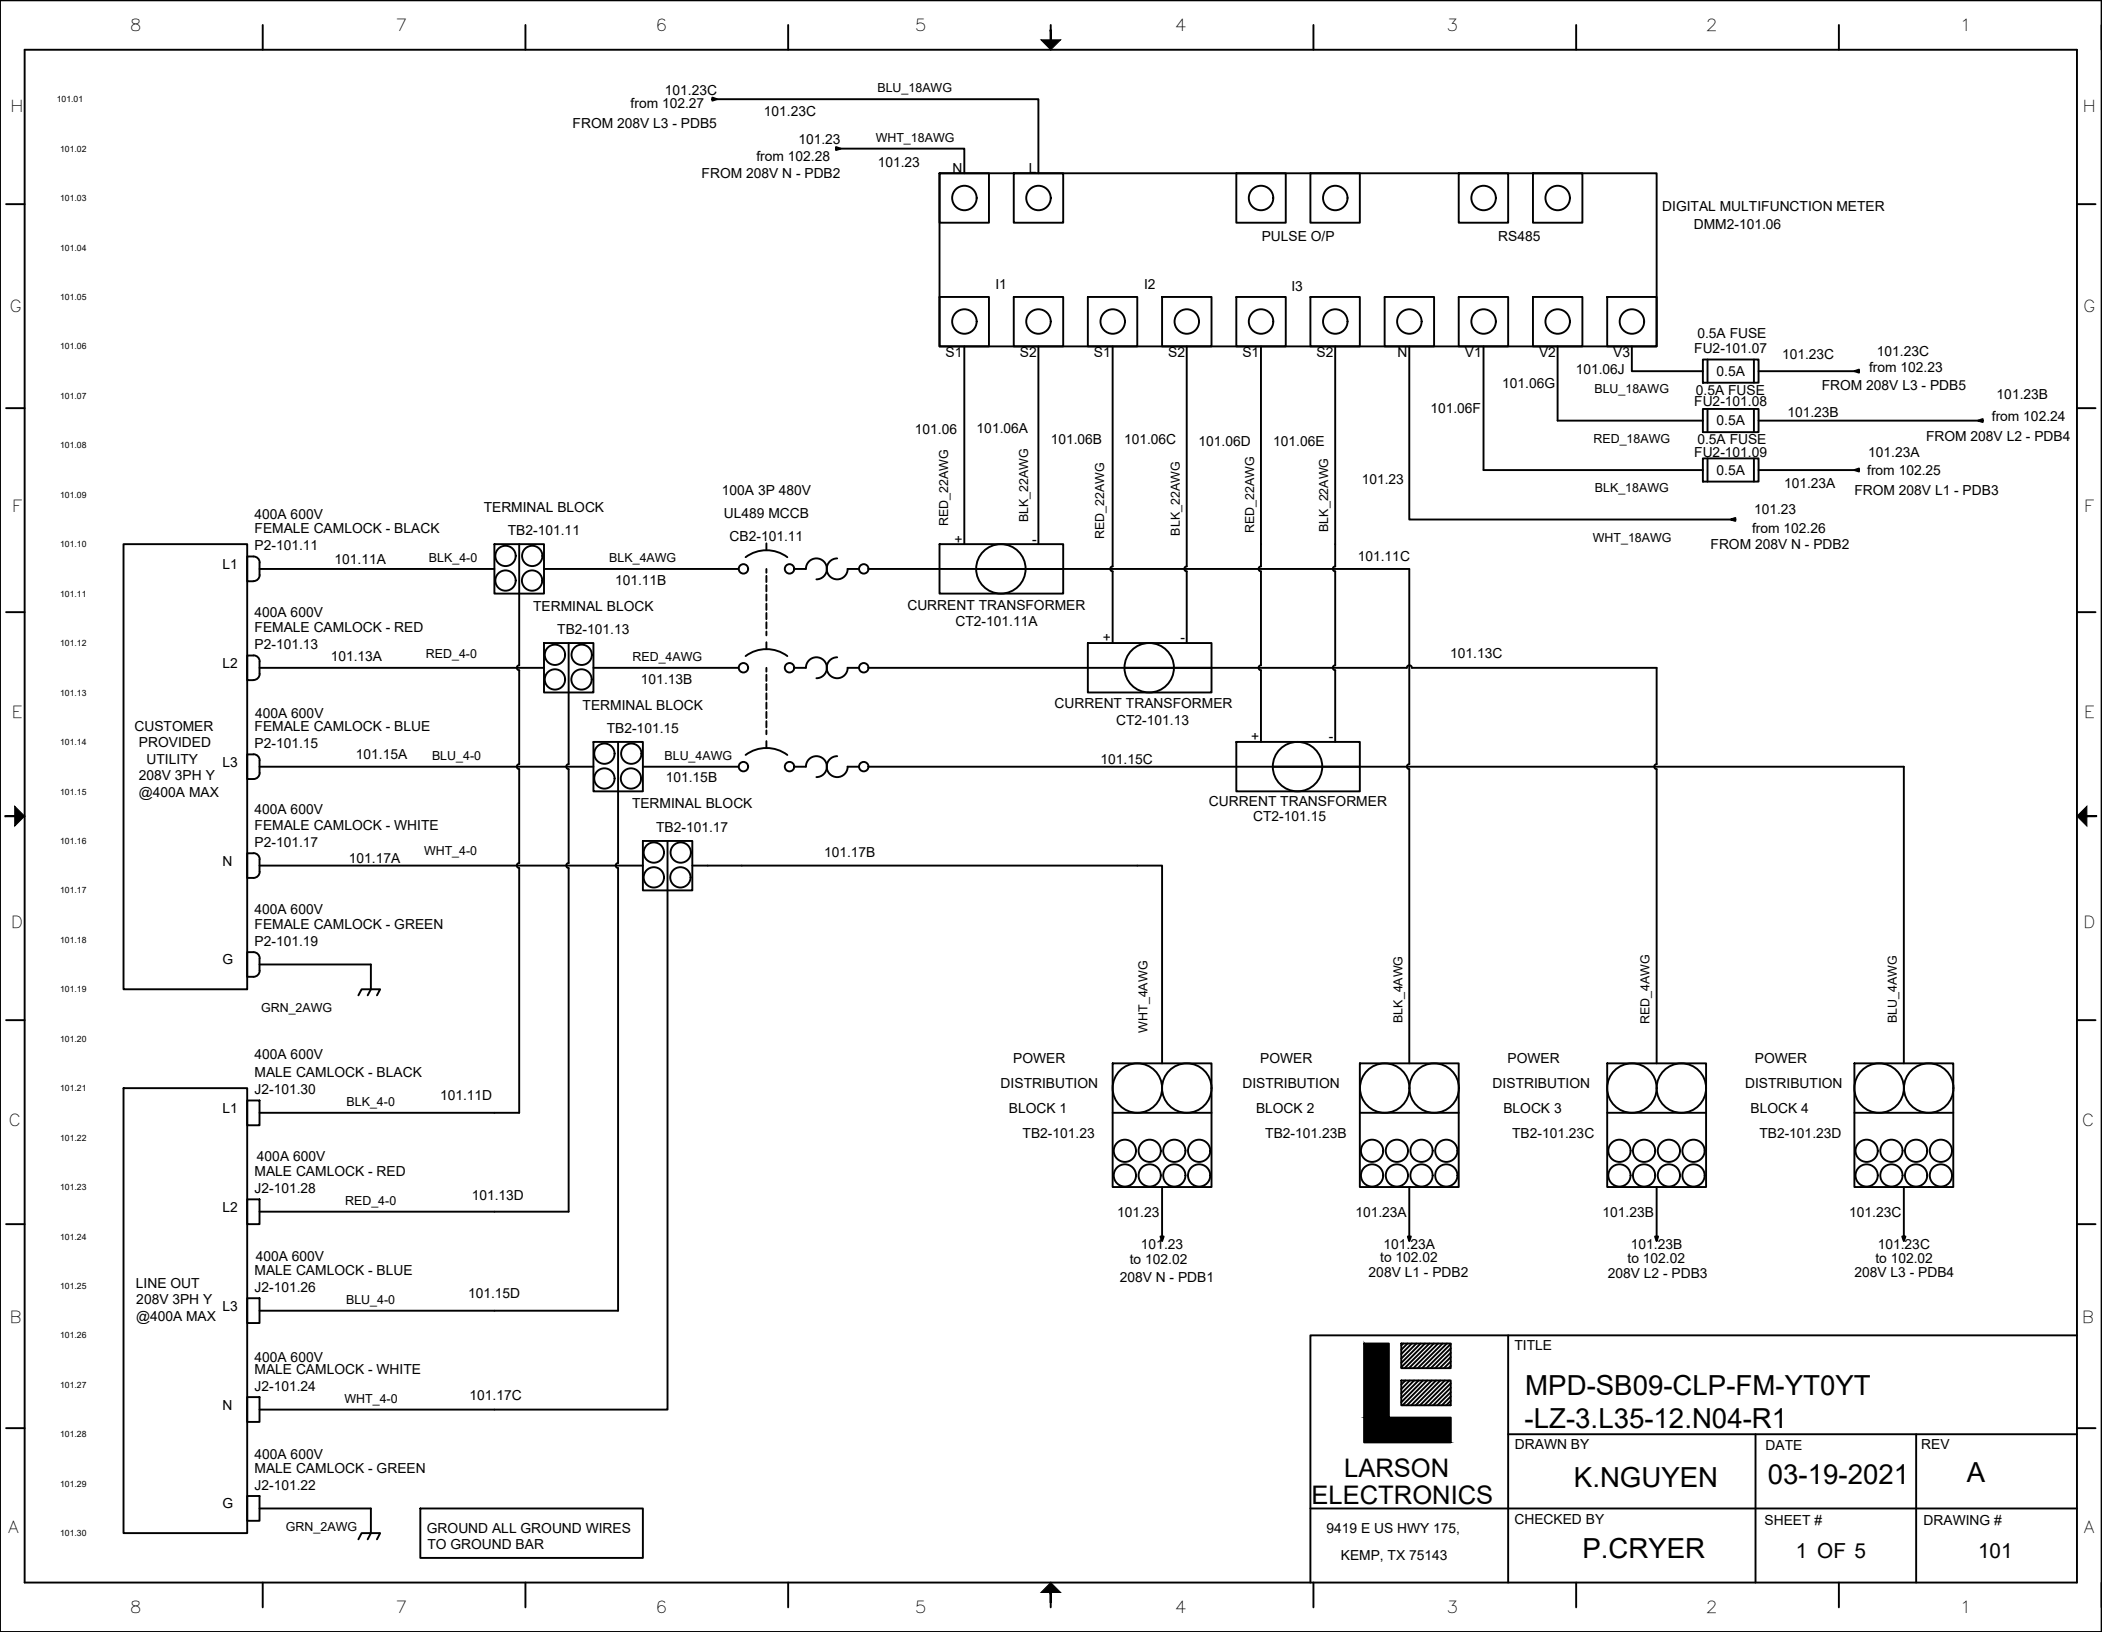


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB09-CLP-FM-YT0YT -LZ-3.L35-12.N04-R1		
	DRAWN BY K.NGUYEN	DATE 03-19-2021	REV A
	CHECKED BY P.CRYER	SHEET # 1 OF 5	DRAWING # 101

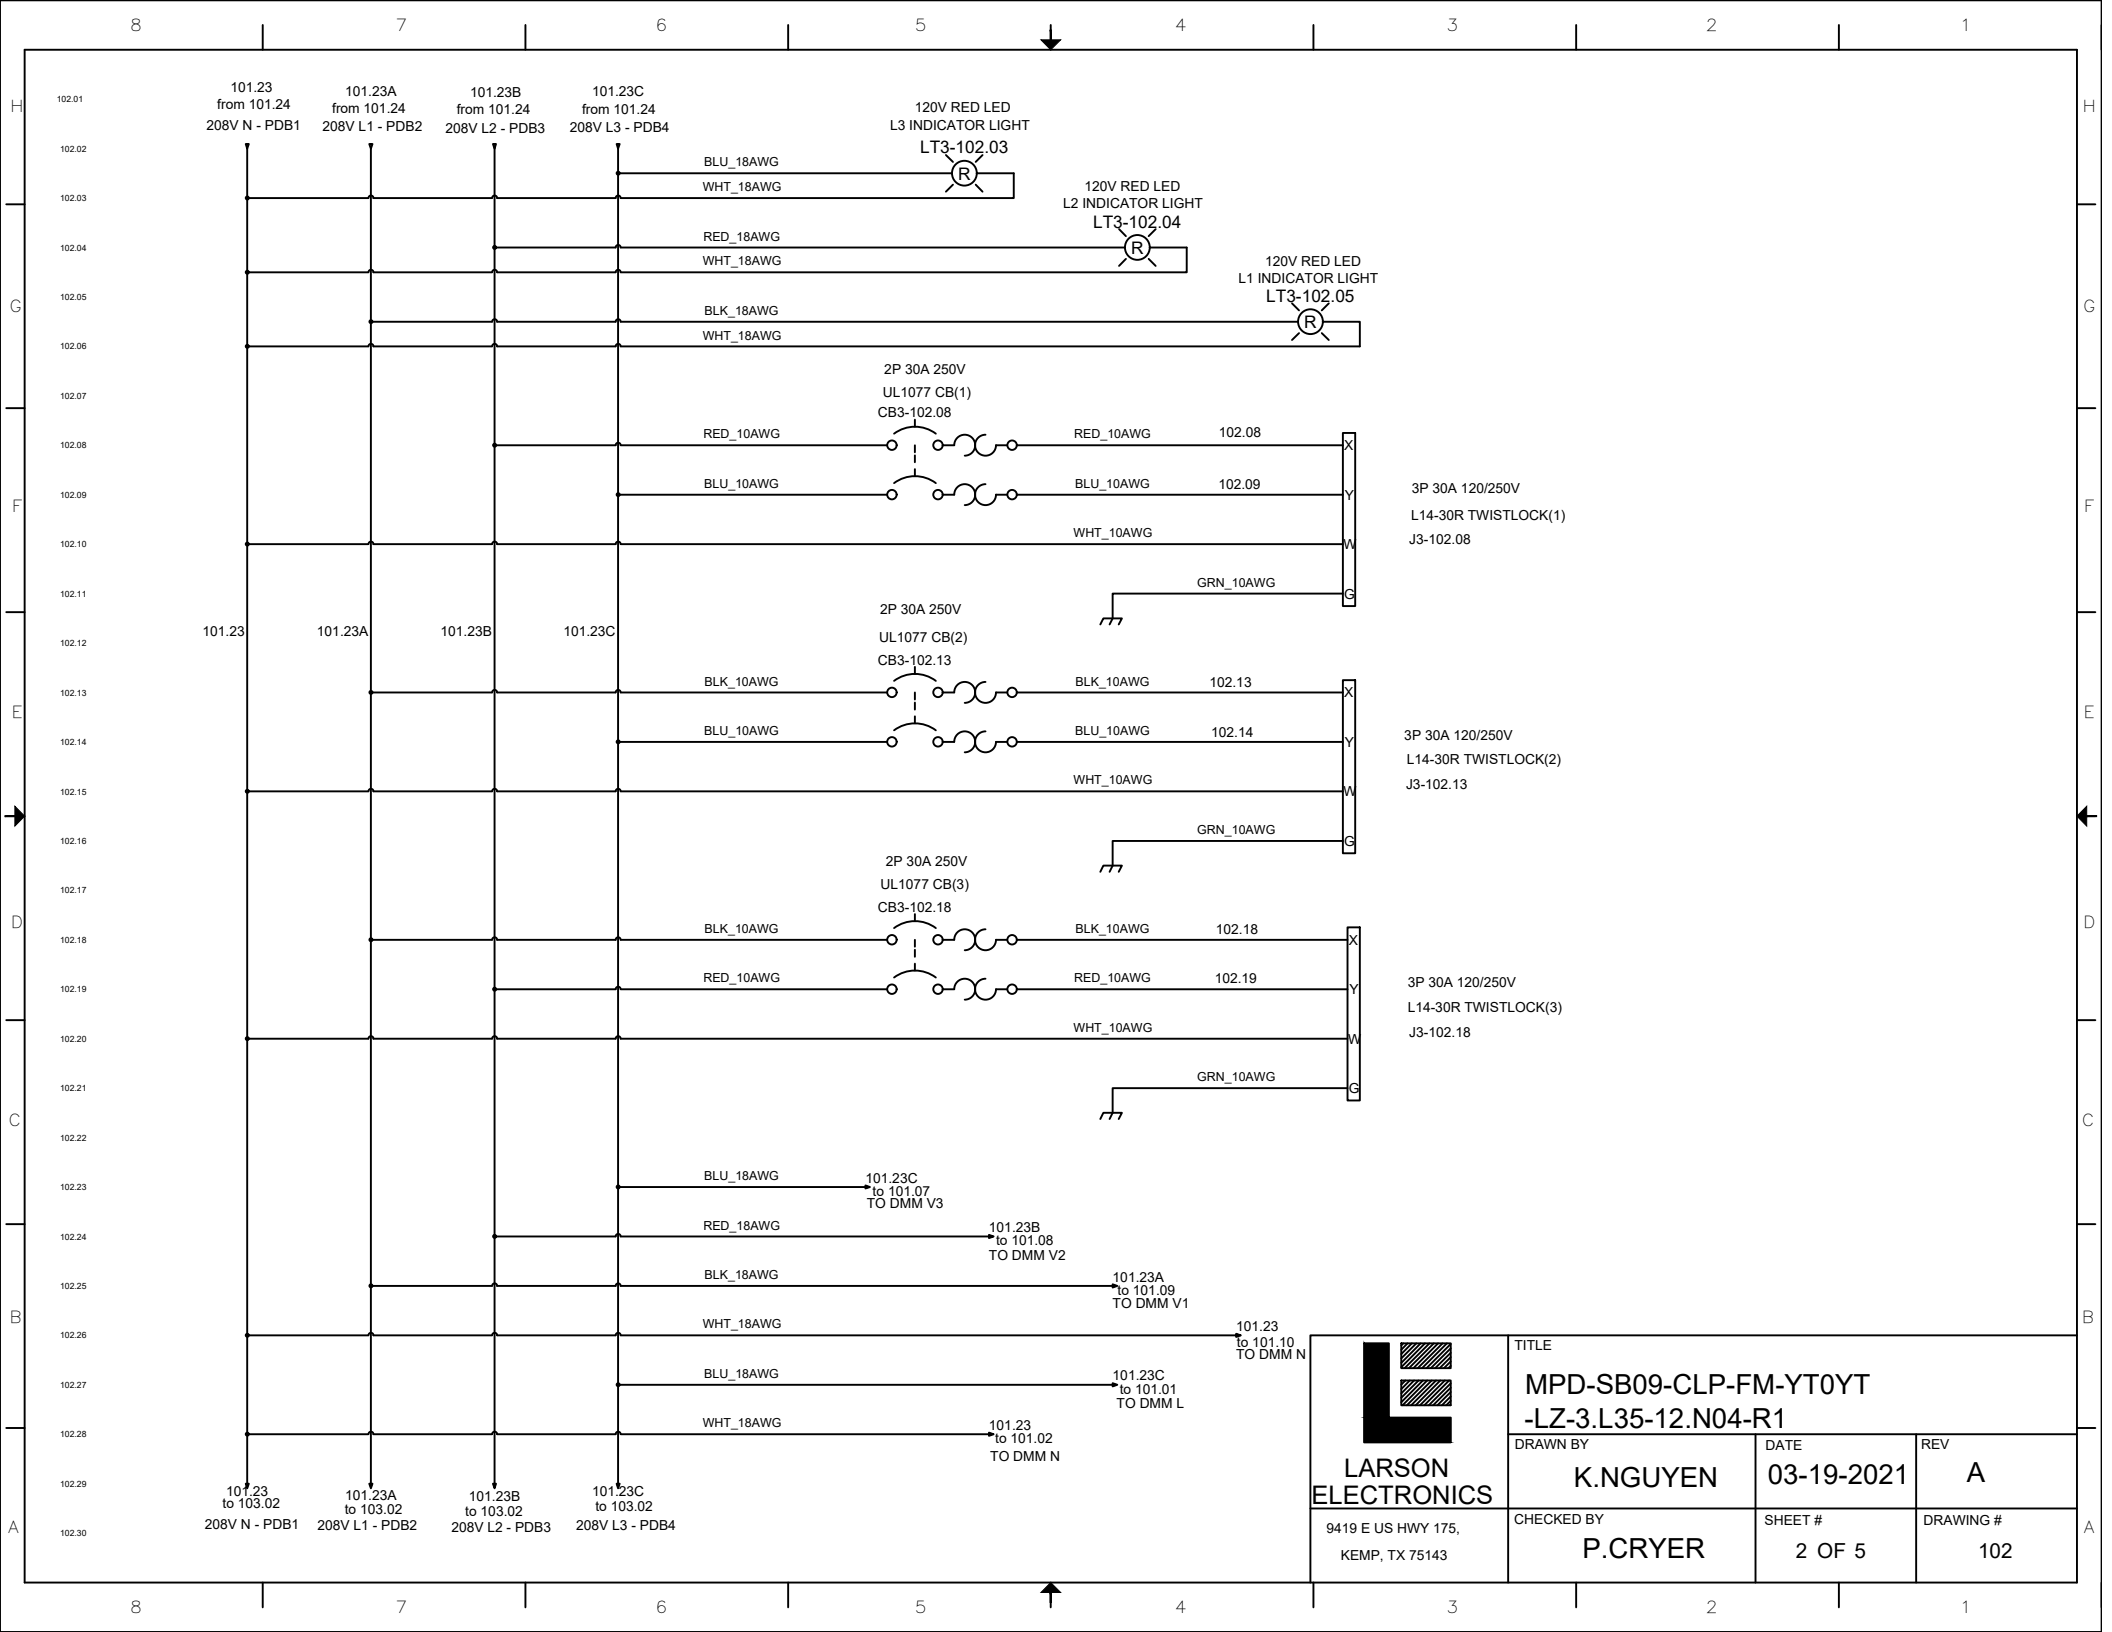


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB09-CLP-FM-YT0YT -LZ-3.L35-12.N04-R1		
	DRAWN BY K.NGUYEN	DATE 03-19-2021	REV A
	CHECKED BY P.CRYER	SHEET # 2 OF 5	DRAWING # 102

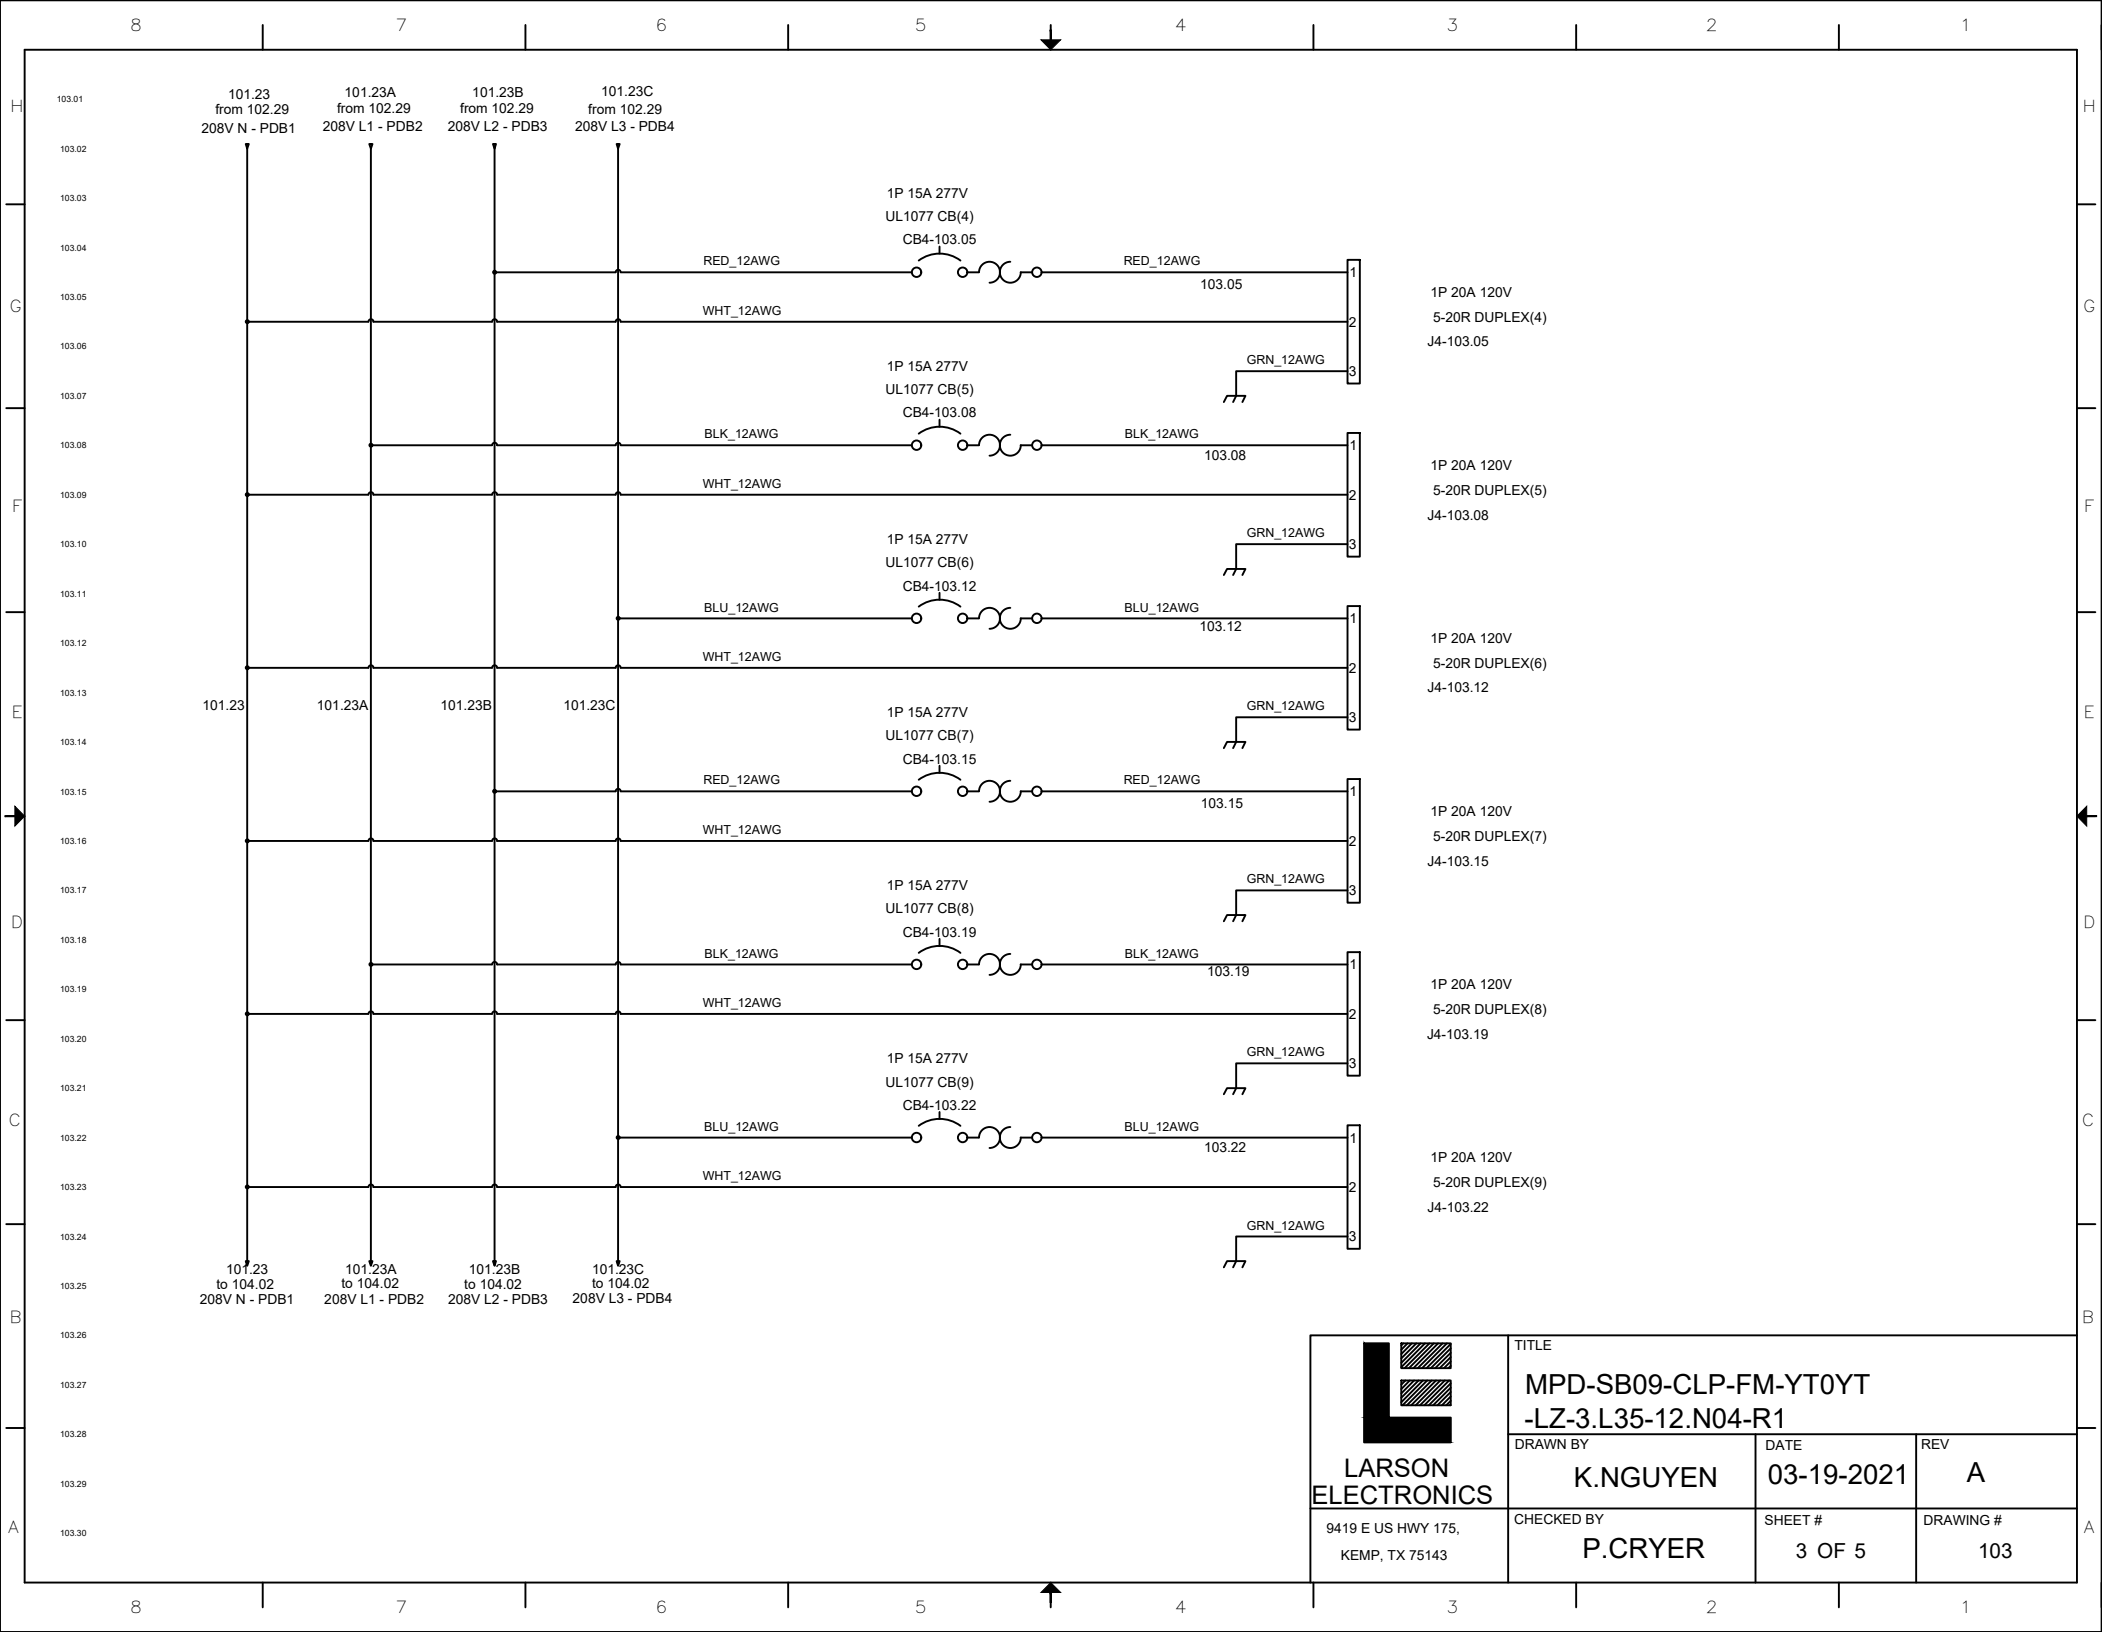

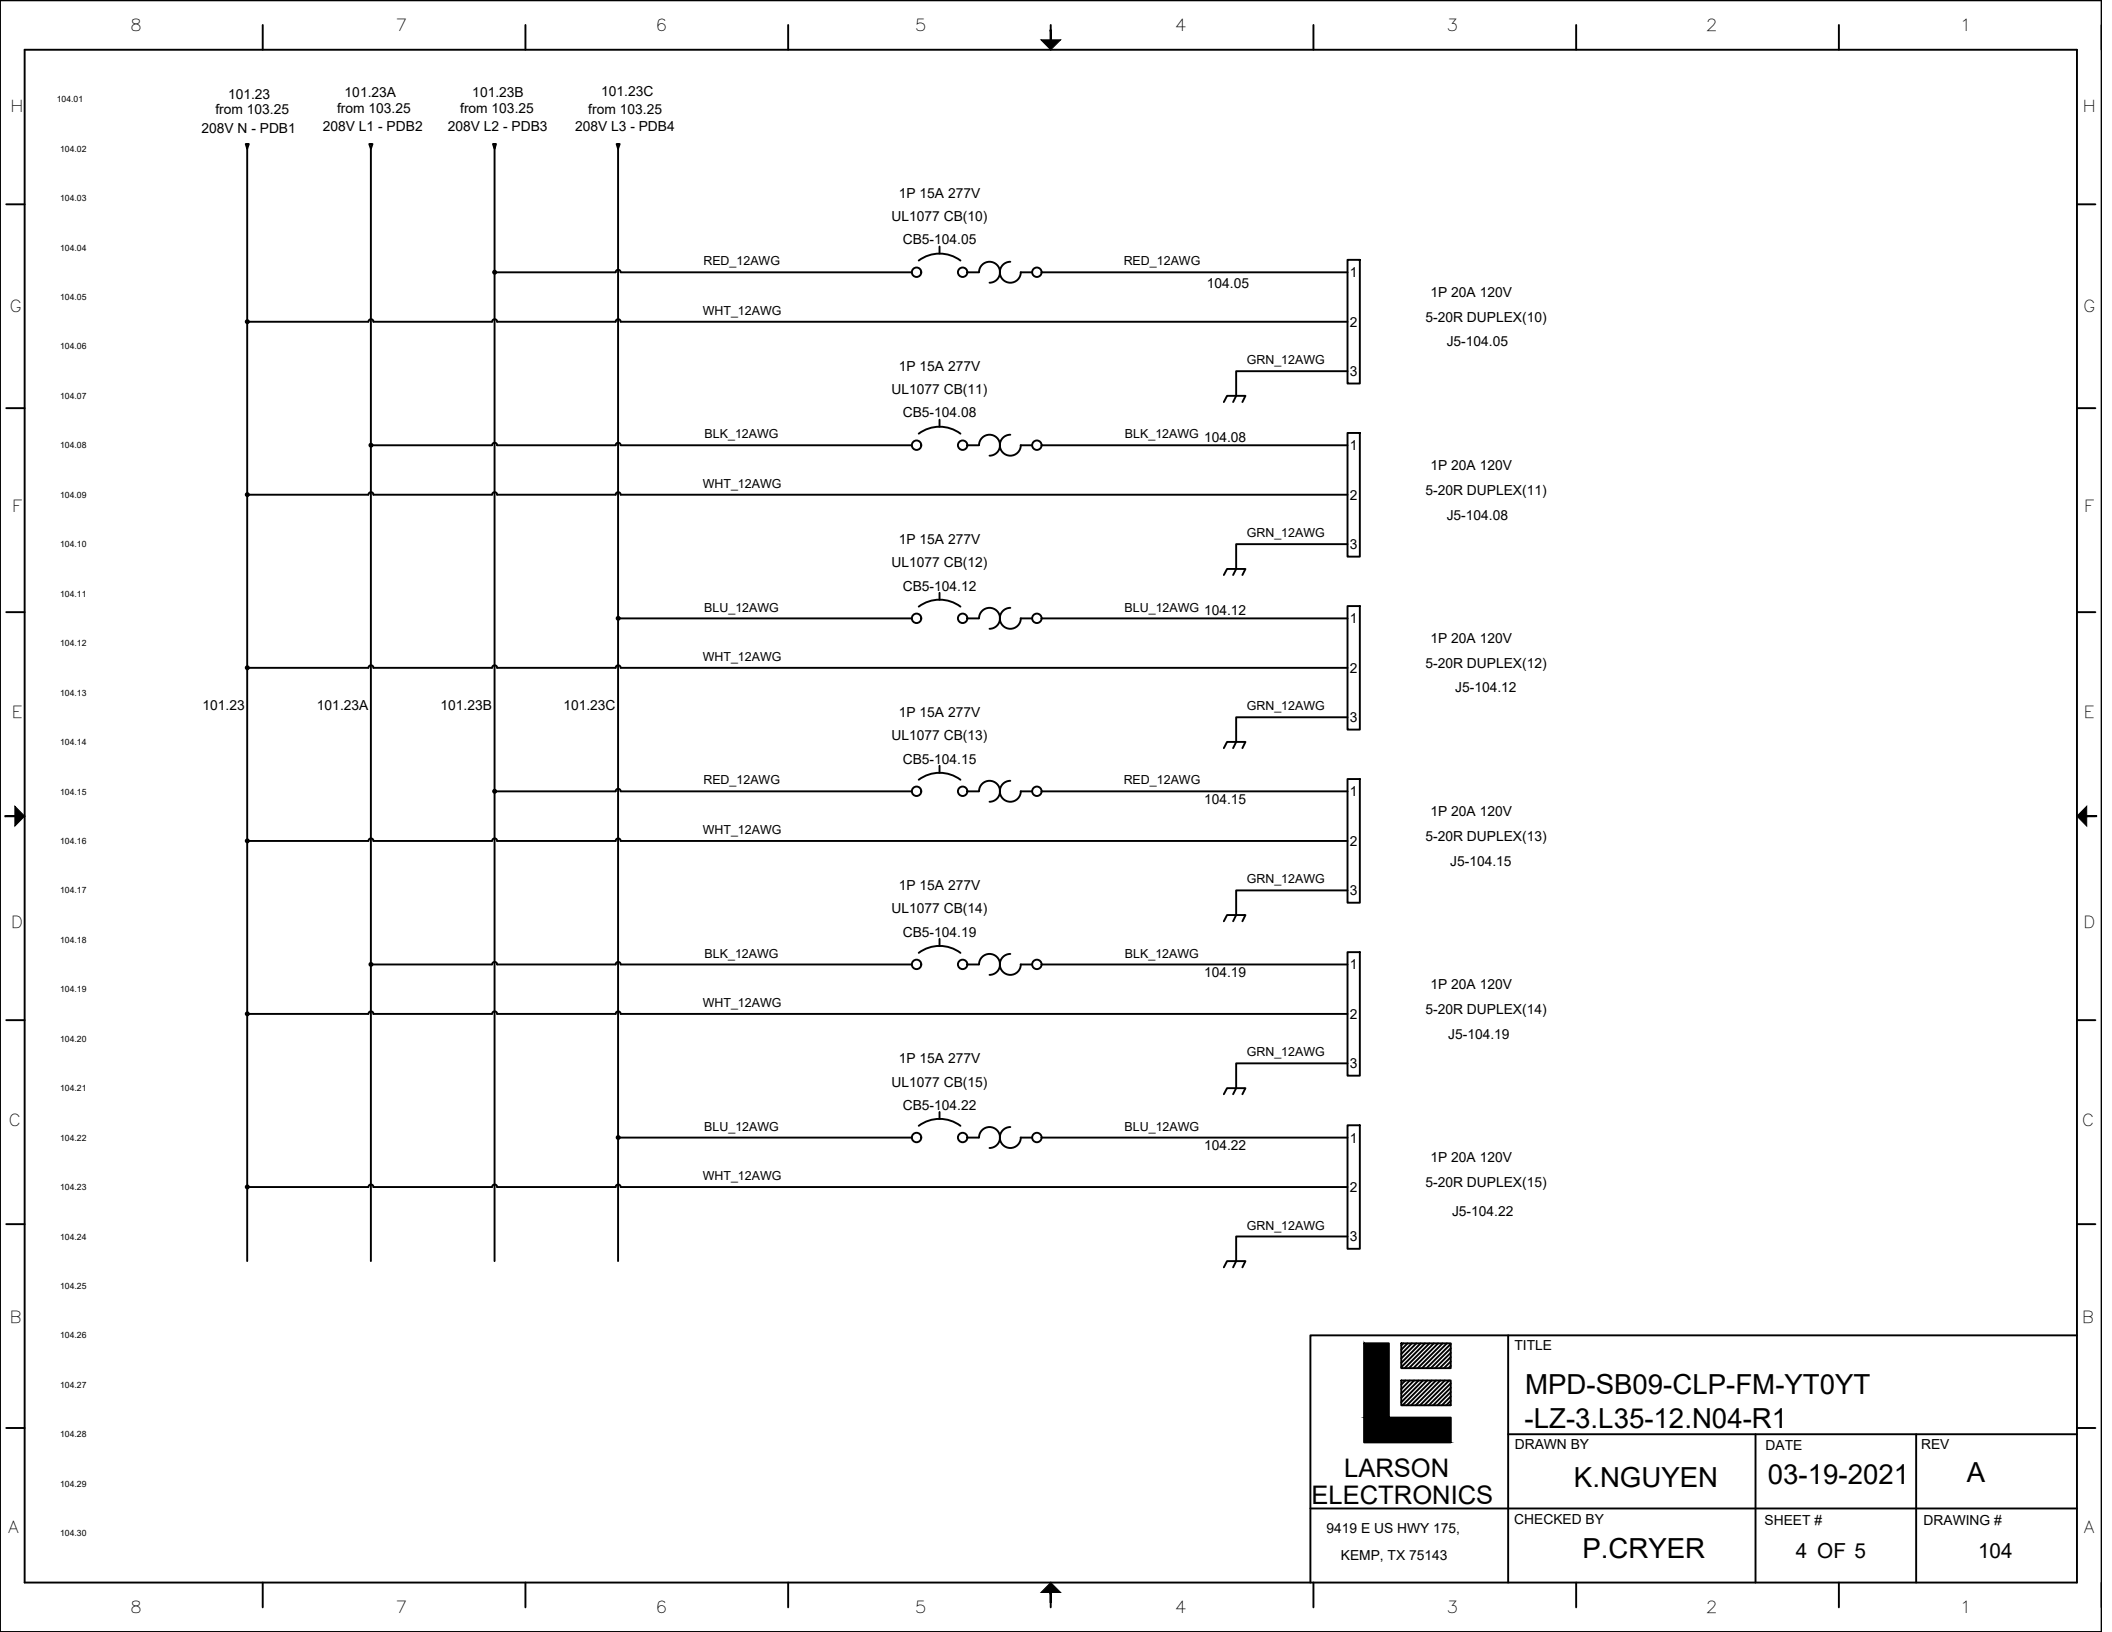

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB09-CLP-FM-YT0YT -LZ-3.L35-12.N04-R1		
	DRAWN BY K.NGUYEN	DATE 03-19-2021	REV A
	CHECKED BY P.CRYER	SHEET # 4 OF 5	DRAWING # 104

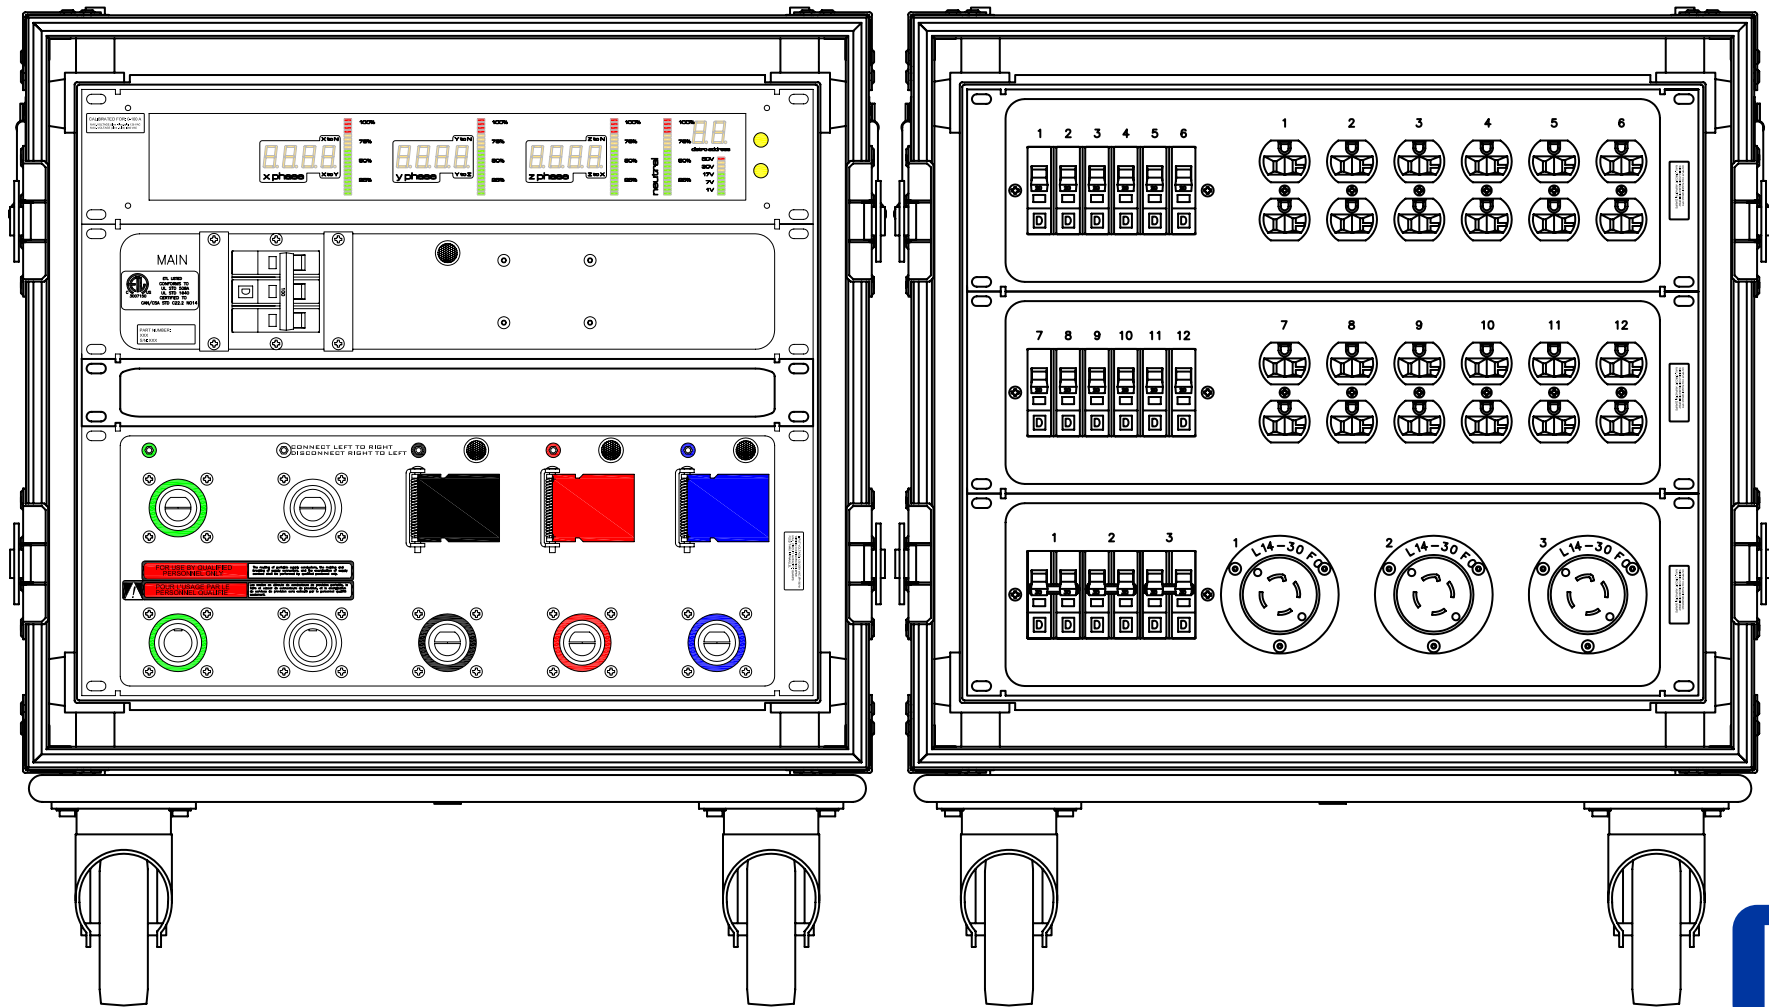

**LARSON
ELECTRONICS**

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

DIMENSIONS ARE IN INCHES		DRAWN	NAME
MATERIAL		CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING			

TITLE:		
MPD-SB09-CLP-FM-YTOYT -LZ-3.L35-12.N04-R1		
SIZE A	DWG. NO.	REV
		SHEET 1 OF 1



WARNING
FOR USE BY QUALIFIED PERSONNEL ONLY - The
moving of certain loads constitutes the moving
and/or changing of safety conditions, and the
operation and deactivation of safety systems
shall be performed by qualified personnel only.

LARSON ELECTRONICS
SPC-5859-CLP-FM-TT97T42-0135-12 N44-B1
Larson Electronics, Inc. 10000 N. 10th Ave.
Suite 1000
Phoenix, AZ 85021
Phone: 602.998.1000
Fax: 602.998.1001
Email: sales@larsonelectronics.com
Website: www.larsonelectronics.com
Larson Electronics, Inc. 10000 N. 10th Ave.
Suite 1000
Phoenix, AZ 85021
Phone: 602.998.1000
Fax: 602.998.1001
Email: sales@larsonelectronics.com
Website: www.larsonelectronics.com

LARSONELECTRONICS.COM
1-800-369-6671
sales@larsonelectronics.com

LARSON ELECTRONICS
Larson Electronics, Inc. 10000 N. 10th Ave.
Suite 1000
Phoenix, AZ 85021
Phone: 602.998.1000
Fax: 602.998.1001
Email: sales@larsonelectronics.com
Website: www.larsonelectronics.com

CAUTION
HIGH VOLTAGE
1-800-369-6671 / LARSONELECTRONICS.COM

CAUTION
SHED ALL LOADS
BEFORE TURNING
ON / OFF







Frequently Asked Questions (FAQ)