Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

TX-2000VA-480.120-2XAO-R2-15C

Temporary Transformer - 2000 VA - 480V AC to 120V AC - (2) 20A GFCI Duplex Outlets - L16-20P Plug

Product ID: 274667



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

TX-2000VA-480.120-2XAO-R2-15C Power Transformer
Line In Cable: 15` 16/3 SOOW Cord
Line In Cord Cap: 20A NEMA L16-20P Male Plug [480V]
Primary Voltage: 480V AC
Transformer VA: 2000
Secondary Voltage: 120V AC
Secondary Outlets: (2) 5-20R GFCI Duplex Protected w/ Weatherproof Covers
Mounting: Carrying Handle/Surface Mount
Dimensions: 25"H x 14"W x 11"D
Weight: 55 lbs

Ratings/Features
NEMA 3R Weatherproof

Special Orders- Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: +01-903-498-3364
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics TX-2000VA-480.120-2XAO-R2-15C Temporary Power Transformer steps down 480V AC to 120V AC and is ideal for powering single-phase 120V lights and equipment. This transformer features a 480V primary voltage and 120V secondary voltage, with two GFCI protected duplex receptacles with weatherproof flip covers on the secondary side. The input contains a 15` 16/3 SOOW cord with a NEMA L16-20P male plug.

The TX-2000VA-480.120-2XAO-R2-15C temporary portable stepdown transformer from Larson Electronics is built to provide operators with a reliable means to step down commonly found 480V AC to 120V AC while also providing versatility of allowing operation of standard voltage equipment. This compact power distribution transformer is designed for portability and convenience, as well as durability and


includes an integral carrying handle, elevated base platform for protection from standing water, and weatherproof construction that withstands direct water spray and wetness when the self-sealing and weatherproof outlet covers are closed.

The TX-2000VA-480.120-2XAO-R2-15C portable power distribution system converts primary 480V AC electrical current into 120 Volts AC. Primary current is brought in via 15` of 16/3 SOOW cord with a 20-amp 480V NEMA L16-20P male plug. The output side is equipped with two GFCI protected 20-amp 120V duplex receptacles with hinged weatherproof covers.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

REV	DESCRIPTION	DATE
A	PRODUCTION RELEASE	1/24/2021

TX-2000VA-480.120-2XAO-R2-15C

LARSON ELECTRONICS®

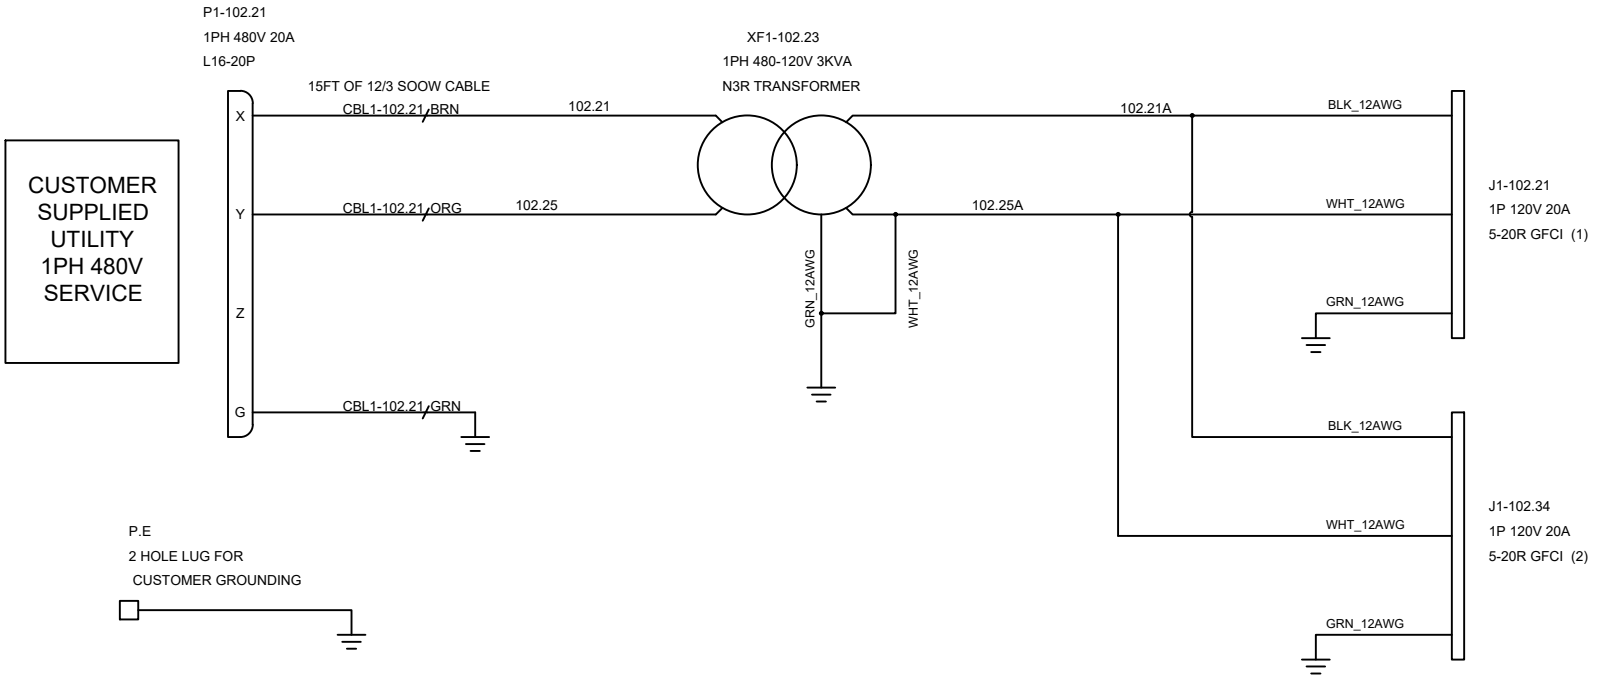

TAGS	QTY	CATALOG	DESCRIPTION
P1-102.21	1	UNV00013639	3PH 4W 480V 20A LOCKING L16-20P PLUG
J1-102.21 J1-102.34	2	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
P.E	1	UNV00007136	2 CONDUCTOR GND LUG
CBL1-102.21	1	UNV00002908	CORD 12/3 SOOW UL 90C BLK CABLE
XF1-102.23	1	UNV00003772	1PH 480V-120/240V 3KVA TRANSFORMER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE: TX-2000VA-480.120-2XAO-R2-15C

DRAWN BY	DATE	REV
S.DESAI	1/24/2021	A
CHECKED BY	SHEET #	DRAWING #
K.NGUYEN	1 OF 1	101

Frequently Asked Questions (FAQ)