Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1

0.25 KVA Voltage Stabilizer - 95-130V 1PH Input to 118V 1PH Output - 60Hz - Wall Mounted

Product ID: 303936

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.


MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1 Industrial Single-phase Automatic Voltage Stabilizer
Unit Type: Automatic Voltage Stabilizer
Unit Dimensions: 19.75" x 14.50" x 9.62"
Weight: 386 Lbs
Input Voltage: 95-130V 1PH - (H1 and H2)
Input Frequency: 60 Hz
Capacity: 0.25 KVA
Output Voltage: 118V 1PH (X1 and X2)
Output Frequency: 60 Hz
Adjust Time: < 1 Second (Against 10% Input Voltage Deviation)
Protection (Over Voltage): N/A
Delay: 5 Seconds
Load Factor: N/A
Efficiency: 90%
Dielectric Strength: N/A
Display: LCD
Ambient Temperature: -10°C ~ +40°C
Temperature Rise: < 60°C
Temperature Protection: 110 ± 10
Insulation Resistance: 5M
Relative Humidity: < 95%
Mounting: Panel Wall Mounted
Color: Tan

Features/Ratings
LCD Display

Special Orders - Special Requirements
Contact us for special requirements
Intl: 1-214-616-6180
Toll Free: 1-800-369-6671
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com


The Larson Electronics MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1 Industrial Automatic Voltage Stabilizer is designed for industrial and commercial locations. The 0.25 KVA power device comes with an input voltage/frequency of single-phase 95-130V, 60 Hz and an output voltage/frequency of single-phase 118V, 60 Hz. This unit is mobile via four wheels at the bottom of the enclosure.
This 0.25 KVA unit accepts single-phase 95-130V AC 60Hz on the input side (H1 and H2) and provides single-phase 118V AC 60Hz on the output side (X1 and X2). There is a delay of 5 seconds when starting the device and an adjust time of 1 second. This power unit is equipped with several protective features, including overload, short circuit and over temperature. An LCD display located at the front of the voltage stabilizer provides the status of protective features and various real-time indicators, such as input/output voltage, fault indication, delay time and more. The enclosure that houses the voltage stabilizer features vents to promote active cooling during use.
Mounting: The MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1 is secured inside a panel enclosure for wall mounted.
Applications: Industrial facilities, laboratories, air compressor testing, power supply testing, motor equipment testing, quality assurance, lighting systems and more.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique

demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

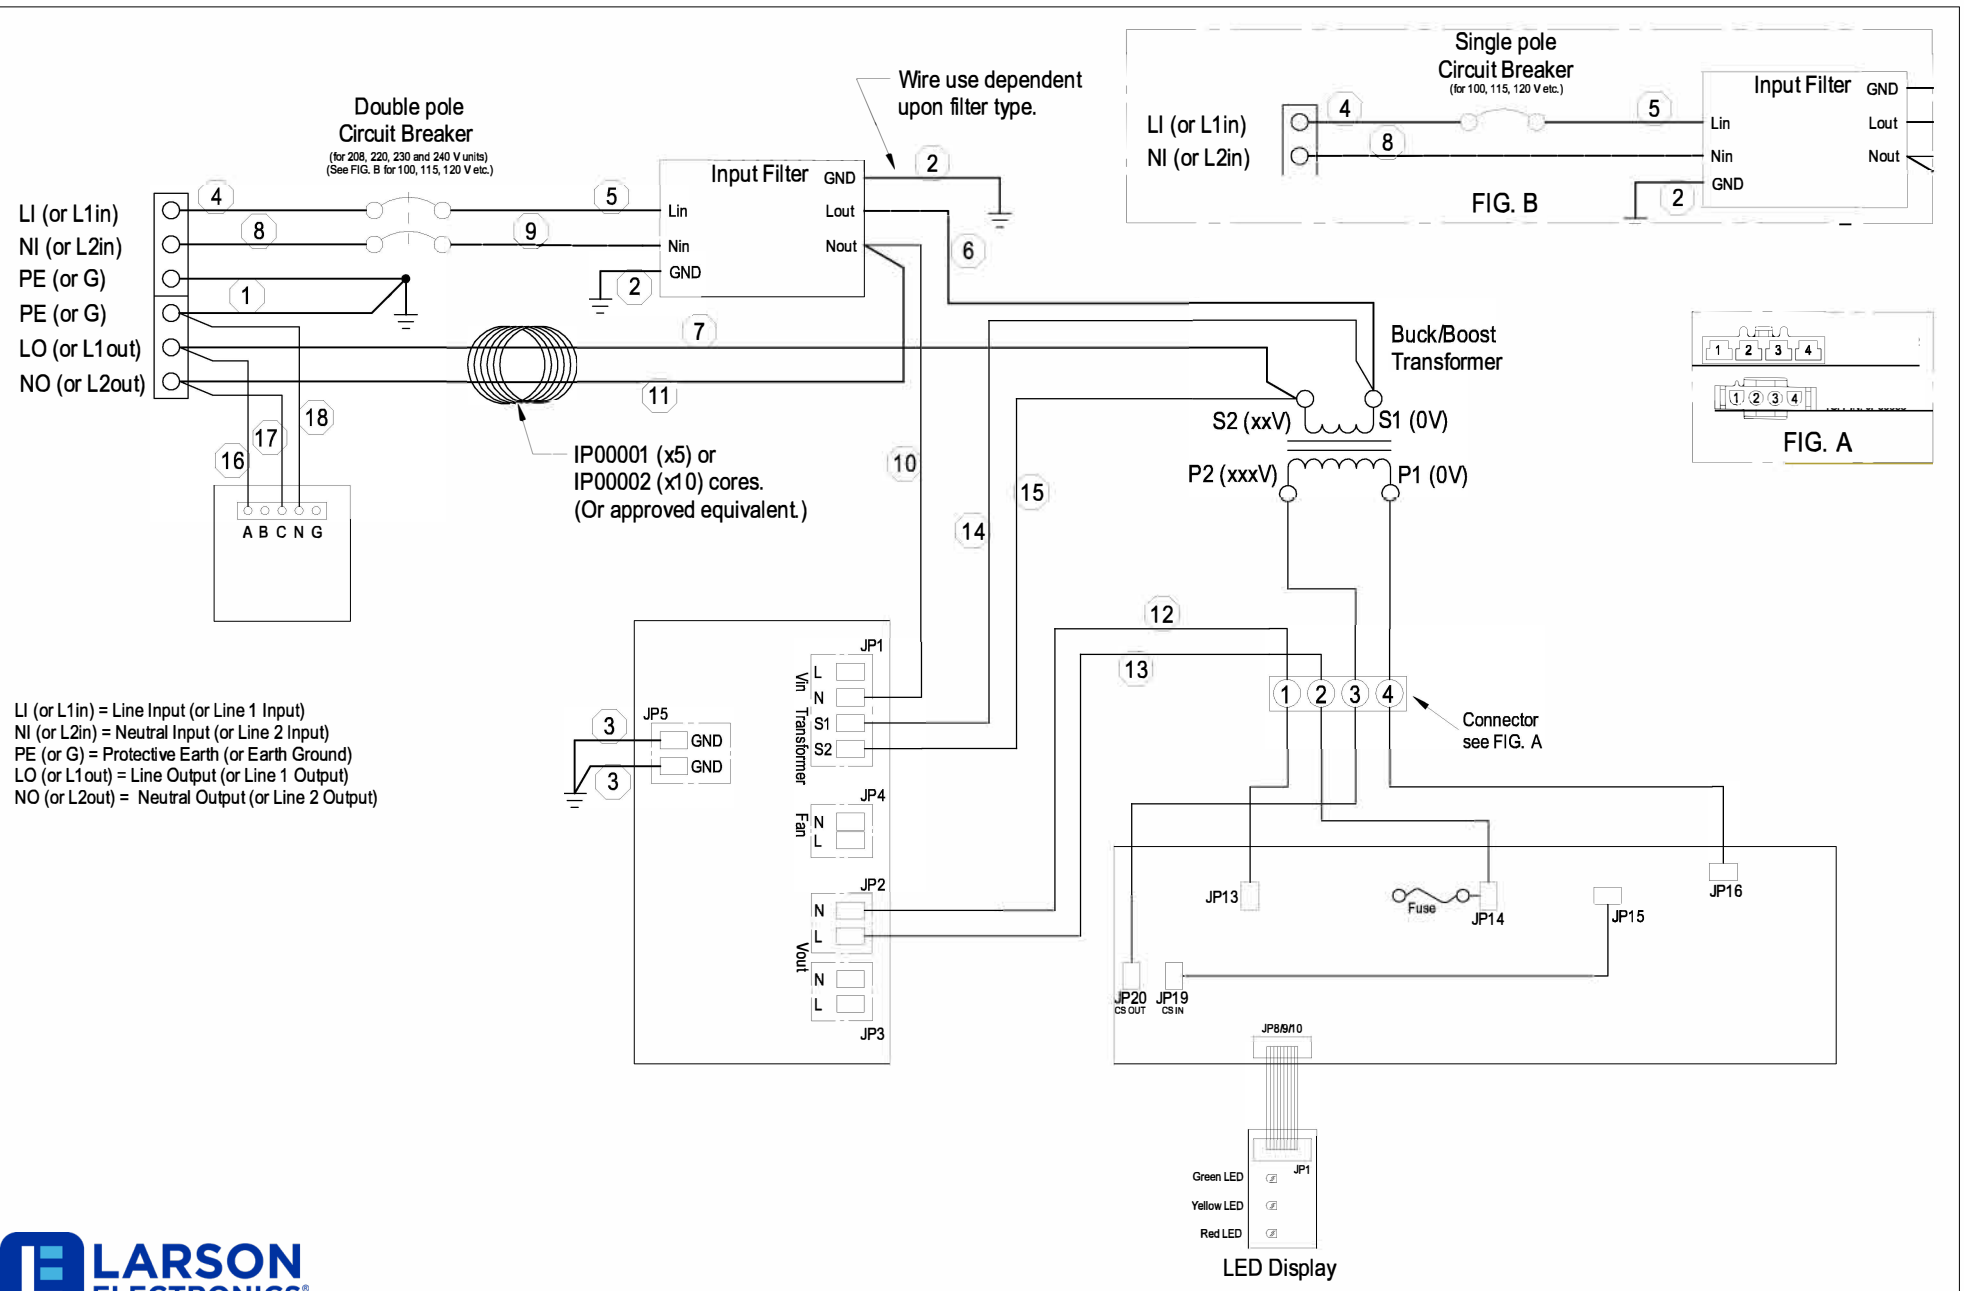

LARSON ELECTRONICS®

	TITLE: MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1	DWG. NO.	REV: 2	DATE:	
		APPROVED:		PAGE 1	OF 1

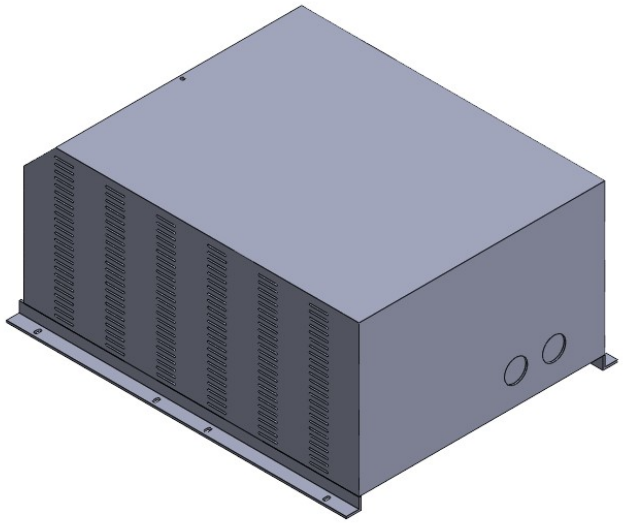


LARSON ELECTRONICS®


PART NUMBER:
MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1


SIZE		REV
A		1

DIMENSIONS ARE IN INCHES				
DO NOT SCALE DRAWING	DATE	5/29/2024	SCALE: NTS	SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

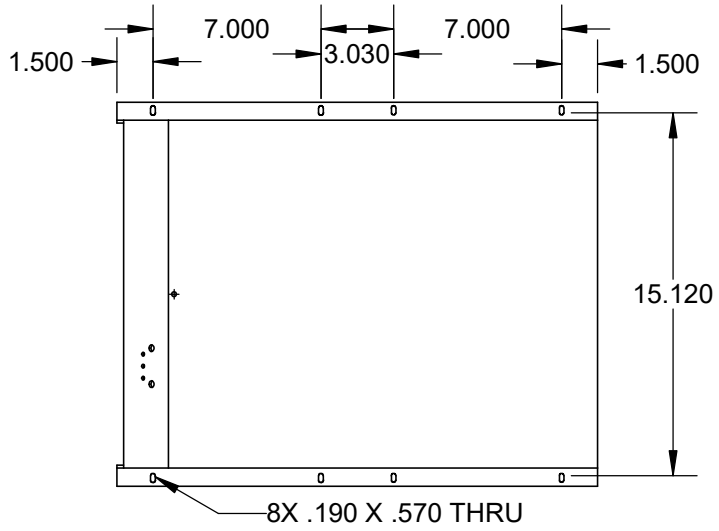

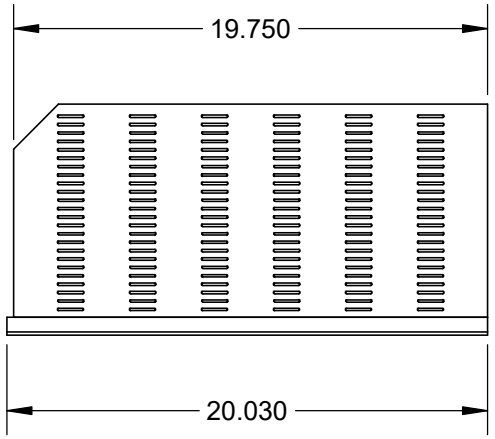

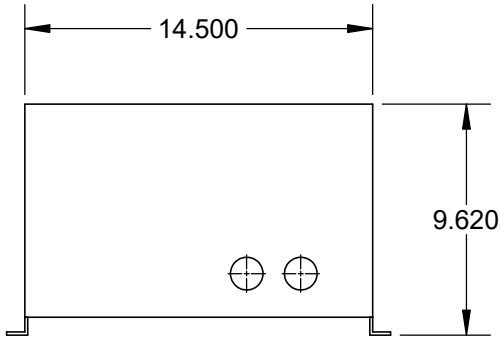

LARSON ELECTRONICS®

PART NUMBER:
MT-LAVR-1P-95.130V-0.25KVA-118V-N1-M1

SIZE	REV
A	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

DIMENSIONS ARE IN INCHES				
DO NOT SCALE DRAWING	DATE	5/29/2024	SCALE: NTS	SHEET 2 OF 2

Frequently Asked Questions (FAQ)