Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-CTX-1P-240.480V-1KVA-120.240V

1 kVA Control Transformer - 240/480V Input Voltage - 120/240V Output Voltage - W/ Secondary Fuse Clips

Product ID: 321194



Image: MT-CTX-1P-240.480V-1KVA-120.240V

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-CTX-1P-240.480V-1KVA-120.240V Control Transformer
Phase: Single Phase
Frequency: 60 Hz
Capacity: 1 kVA
Primary Voltage: 240/480V
Primary Connection: Series (V)
Primary FCAN (Std.): 0 x 0%
Primary FCBN (Std.): 0 x 0%
Secondary Voltage: 120/240V
Secondary Connection: Parallel x Series (Vx2V)
Material: Copper
Primary Termination: Terminal Block
Secondary Termination: Terminal Block
Secondary Overcurrent Protection (OCP): Included, UL-listed Class K fuse clips
Insulation Class: Class A (105°C)
Temperature Rise: 55°C
Ambient Temperature Rating: 40°C
Enclosure Material: Injection Molded Cover
Mounting: Surface Mount with Heavy Steel Feet
Dimensions: 5.5" × 7.25 " × 4.625"
Weight: 34.9 lbs

Approvals/Ratings
Listing: UL Listed
Approved for US and Canada
CE Mark Standard
RoHS Compliant
EN61558-2-2
CSA 22.2 NO 66.1; CSA 22.2 NO 66.2
UL 5085-1; UL 5085-2
NEMA ST-1 Compliant

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-CTX-1P-240.480V-1KVA-120.240V from Larson Electronics is a 1 kVA Single Phase Control Transformer that is powerful, reliable and innovatively designed. With

high-quality silicon steel laminations providing optimal performance, the MT-CTX-1P-240.480V-1KVA-120.240V provides increased reliability and protection against critical equipment failures. This control transformer features an innovative design with a unique terminal block design that allows for a quick and easy hookup along with the ability to easily install fuse clips to the unit. The uniquely designed molded coil covers give this control transformer superior cooling abilities and a sleek appearance.

Transformer Features: With a transformer rating of 1 kVA, the MT-CTX-1P-240.480V-1KVA-120.240V is a machine tool industrial single phase control transformer with a primary voltage of 240/480V. It also provides a secondary voltage of 120/240V. Featuring compact and innovative construction, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.

This unit boasts an innovative terminal block design that allows for easy hookup. Connecting this unit is a simple task thanks to the terminal connection numbers being molded into the terminal block which corresponds to the nameplate and wiring diagrams. A unique fin-shaped, injection molded coil cover gives this unit superior cooling abilities. The unit also features a 105°C insulation class with a 55°C temperature rise.

Benefits: The MT-CTX-1P-240.480V-1KVA-120.240V control transformer offers many benefits to the consumer. Full encapsulation of the windings and internal terminations ensures that the unit is protected from moisture, dirt, dust and other contaminants. Removeable finger safe terminal covers contribute towards the overall clean and sleek look of the unit. The compact and innovative design features make this a great choice for industrial tool applications.

This control transformer has heavy steel mounting feet that are either welded or bolted to the core. This transformer features terminal block terminations.


Applications: Power Managment, Industrial

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Wiring Diagram

WARNING: *DO NOT SERVICE WHILE ENERGIZED!*

MT-CTX-1P-240.480V-1KVA-120.240V

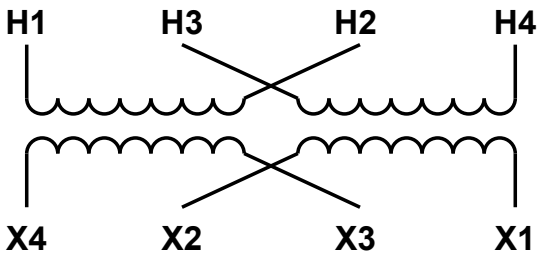

Primary Volts	Connect Lines To	Interconnect
480	H1-H4	H3-H2
240	H1-H4	H1-H3, H2-H4

Secondary Volts	Connect Lines To	Interconnect
240	X1-X4	X3-X2
120	X1-X4	X1-X3, X2-X4

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664




Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

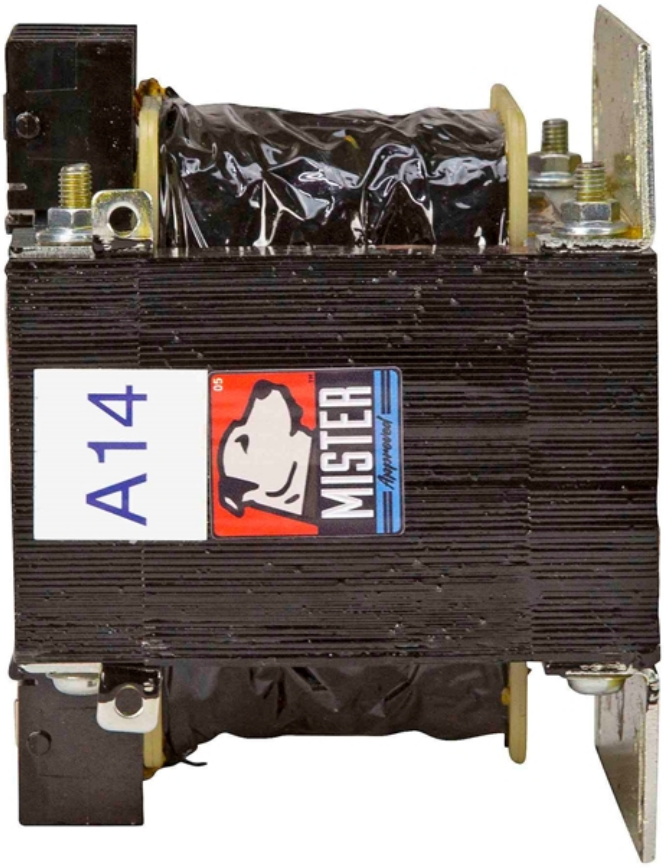

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs