

MT-CTX-1PH-4160V-3KVA-120V

3 kVA Control Transformer - 4160V Input, 120V Output - 1PH/60 Hz - Open Type

Product ID: 321718



Image: MT-CTX-1PH-4160V-3KVA-120V

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-CTX-1PH-4160V-3KVA-120V Control Transformer

Type: Control Transformer, Open Type
Phase: Single Phase
Frequency: 60 Hz
Capacity: 3 KVA
Primary Voltage: 4160 V
Primary Connection: Series (V)
Primary FCAN (Std.): 0 x 0%
Primary FCBN (Std.): 0 x 0%
Secondary Voltage: 120 V
Secondary Connection: Parallel x Series (Vx2V)
BIL: 60 KV
Material: Copper
Primary Termination: Terminal Block
Secondary Termination: Terminal Block
Insulation: 130°C
Temperature Rise: 80°C
Enclosure Material: Injection Molded Cover
Mounting: Heavy Steel Feet
Dimensions: 15.19"D x 20"W x 15.5"H
Weight: -

Approvals/Ratings

NRTL Listed for United States and Canada
NRTL Certified to CSA 22.2 NO 66.1
NRTL Certified to CSA 22.2 NO 66.2
NRTL Certified to UL 5085-1
NRTL Certified to 5085-2
Control Transformer

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-CTX-1PH-4160V-3KVA-120V from Larson Electronics is a 4160 V Single Phase Control Transformer that is powerful and reliable. With high-quality silicon steel laminations providing optimal performance, the MT-CTX-1PH-4160V-3KVA-120V

provides increased reliability and protection against critical equipment failures. This control transformer features an innovative design with a unique terminal block design that allows for a quick and easy hookup along with the ability to easily install fuse clips to the unit. The uniquely designed molded coil covers give this control transformer superior cooling abilities and a sleek appearance.

Transformer Features: With a transformer rating of 3 KVA , the MT-CTX-1PH-4160V-3KVA-120V is a machine tool industrial single phase control transformer with a primary voltage of 4160 V. It also provides a secondary voltage of 120 V. Featuring compact and innovative construction, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.


This unit boasts an innovative terminal block design that allows for easy hookup. Connecting this unit is a simple task thanks to the terminal connection numbers being molded into the terminal block which corresponds to the nameplate and wiring diagrams. A unique fin-shaped, injection molded coil cover gives this unit superior cooling abilities. The unit also features a 130°C insulation class with an 80°C temperature rise.

Benefits: The MT-CTX-1PH-4160V-3KVA-120V control transformer offers many benefits to the consumer. Full encapsulation of the windings and internal terminations ensures that the unit is protected from moisture, dirt, dust and other contaminants. Removable finger safe terminal covers contribute towards the overall clean and sleek look of the unit. The compact and innovative design features make this a great choice for industrial tool applications.

This control transformer has heavy steel mounting feet that are either welded or bolted to the core. This transformer features terminal block terminations.

Applications: Power Management, Industrial

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

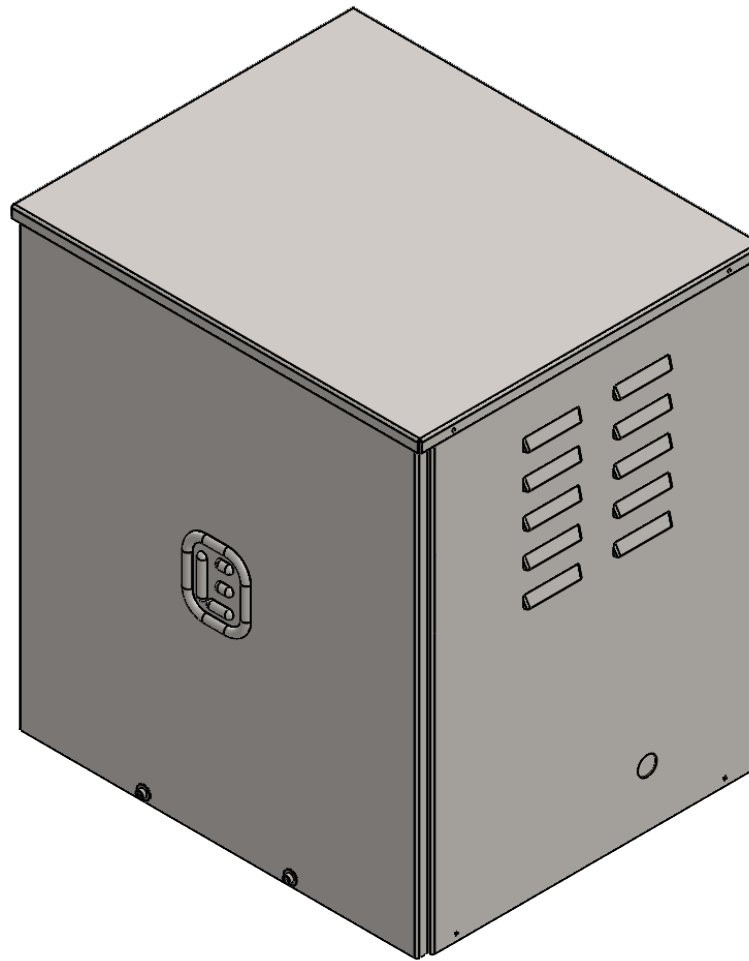

PART NUMBER:		
MT-CTX-1PH-4160V -3KVA-120V		
SIZE		REV
A		1
SCALE: NTS		SHEET 1 OF 15

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

UNLESS OTHERWISE
NOTED:
Angle +/- 5 deg.
X +/- 1/2
.X +/- 1/4
.XX +/- 1/8





DIMENSIONS ARE IN INCHES

DO NOT SCALE DRAWING

DATE

2/25/2026

SCALE: NTS

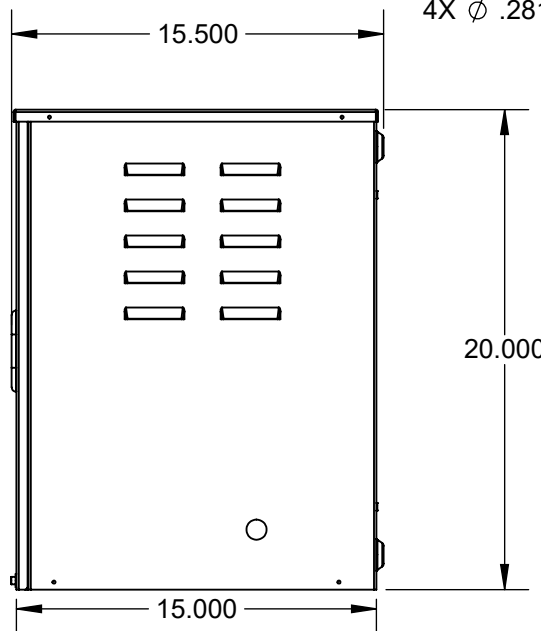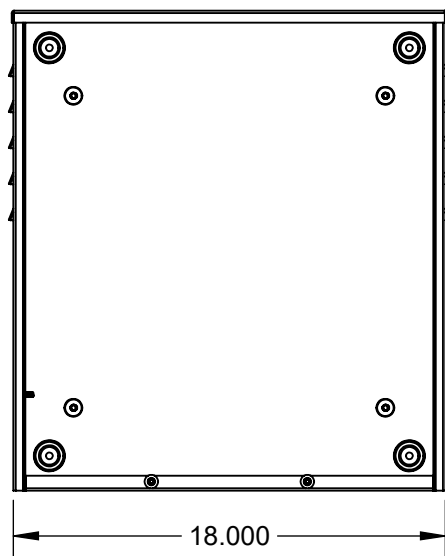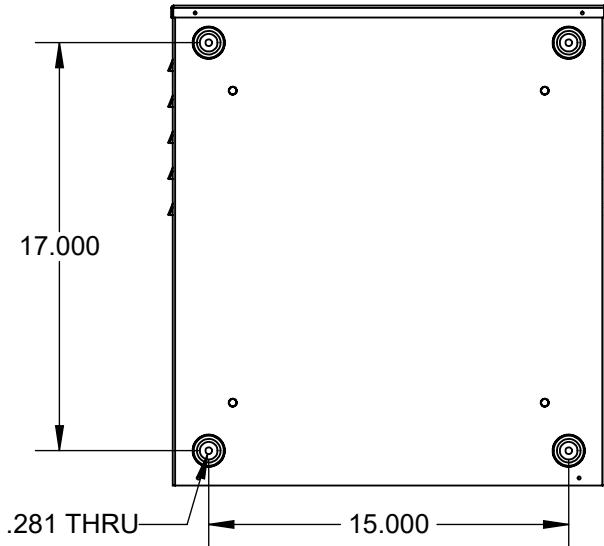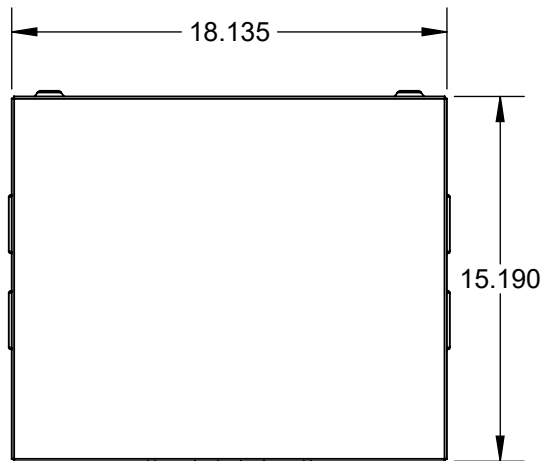

PART NUMBER:

**MT-CTX-1PH-4160V
-3KVA-120V**

SIZE
A

REV
1

SCALE: NTS

SHEET 2 OF 15

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

UNLESS OTHERWISE NOTED:
Angle +/- 5 deg.
X +/- 1/2
.X +/- 1/4
.XX +/- 1/8

DIMENSIONS ARE IN INCHES

DO NOT SCALE DRAWING

DATE

2/25/2026











Frequently Asked Questions (FAQ)

There are no Faqs