Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

PCOF-MV-R-19.9KV-6A-40KA

19.9 kV, 75 kV BIL, 6 A, Type K Standard Porcelain Cutout Fuse w/ 6A Fuse Link

Product ID: 324341



Image: PCOF-MV-R-19.9KV-6A-40KA

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

PCOF-MV-R-19.9KV-6A-40KA Porcelain Cutout Fuse
Type: Porcelain Cutout Fuse, w/ Fuse Link
Phase: Single-Phase
Dimensions: TBD
Weight: TBD
Voltage Rating: 19.9 kV
Voltage Maximum: -
BIL: 75 kV
Current Rating: 6 A
Fuselink Current Range: Up to 6 A
Interrupt Capacity (Asym Amps): 40 kA
Creepage and Leakage Distance: TBD
Arc Shortening Rod: Included
Bracket Type: No Bracket
Fuse Holder: Included, 180A Rated
Mount: Vertical Mount

Ratings/Approvals
Complies with ANSI/IEEE C37.41– 2016
Complies with ANSI/IEEE C37.42 – 2016

Features:
Synthetic Arc Quenching Fuse Holder Liner Material
Single Vent Solid Cap Design
Uses Universal Style Fuse Links

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The PCOF-MV-R-19.9KV-6A-40KA from Larson Electronics is a porcelain cutout fuse type K, parallel groove connector with no bracket.

The PCOF-MV-R-19.9KV-6A-40KA protects your distribution system or other items such as transformers and capacitor banks with Chance Type K Standard Cutouts. The PCOF-MV-R-19.9KV-6A-40KA is rated for application on system voltages up to 19.9 kV 75 kV BIL. The PCOF-MV-R-19.9KV-6A-40KA can be fused up to 6A and uses Universal Style fuse links so

coordination with other devices is easily achievable.

Suggested Applications: Power distribution, service switches, switchboard mains and feeders, motor control center mains, large motor branch circuits, circuit breaker protection, and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664




Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

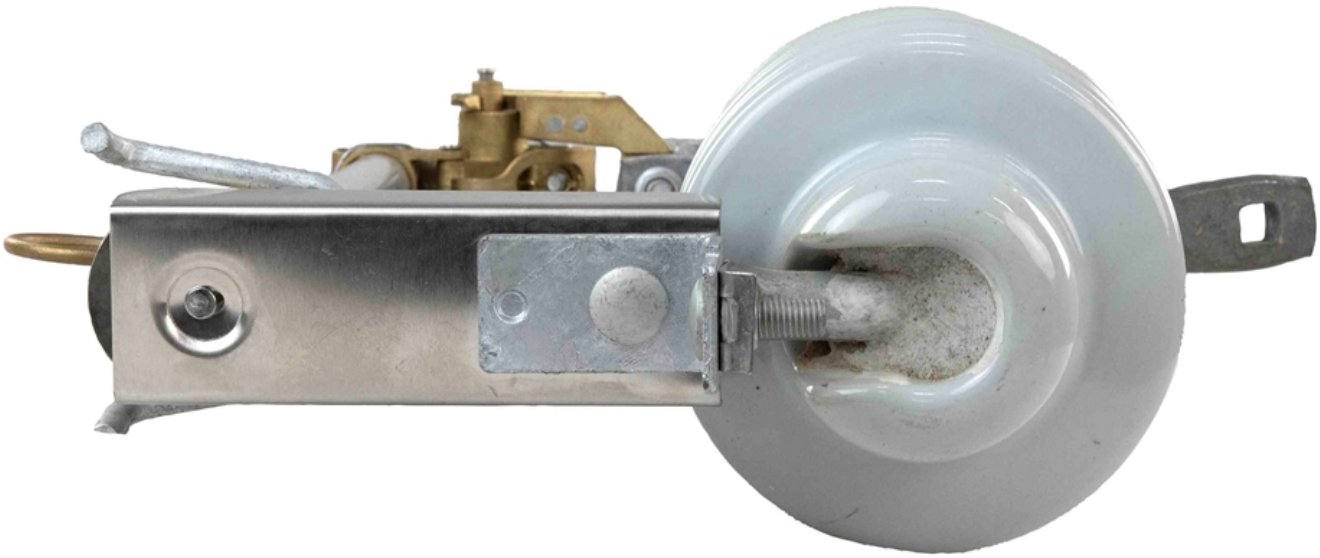

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs