

### MT-CTX-380V-250VA-110V-50HZ

**250 VA Control Transformer - 380V Input Voltage - 110V Output Voltage - 50 Hz**

**Product ID: 337917**



Image: MT-CTX-380V-250VA-110V-50HZ

**Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.**

#### **MT-CTX-380V-250VA-110V-50HZ Control Transformer**

**Phase:** Single Phase  
**Frequency:** 50 Hz  
**Capacity:** 250 VA (0.25 kVA)  
**Primary Voltage:** 380V  
**Primary Connection:** Series (V)  
**Primary FCAN (Std.):** 0 x 0%  
**Primary FCBN (Std.):** 0 x 0%  
**Secondary Voltage:** 110V  
**Secondary Connection:** Parallel x Series (Vx2V)  
**Material:** Copper  
**Primary Termination:** Terminal Block  
**Secondary Termination:** Terminal Block  
**Insulation:** 130°C  
**Temperature Rise:** 80°C  
**Enclosure Material:** Injection Molded Cover  
**Mounting:** Heavy Steel Feet  
**Dimensions:** 4.75"H x 4.5"W x 4.00"D  
**Weight:** 5.75 lbs

#### **Approvals/Ratings**

Complies with NEC / CEC Standards  
Complies with IEC Standards  
Control Transformer

#### **Special Orders - Special Requirements**

Contact us for special requirements  
**Toll Free:** 1-800-369-6671  
**Intl:** 1-903-270-1187  
**E-mail:** [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com)

**The MT-CTX-380V-250VA-110V-50HZ from Larson Electronics is a 250 VA Single Phase Control Transformer that is powerful and reliable. With high-quality silicon steel laminations providing optimal performance, the MT-CTX-380V-250VA-110V-50HZ provides increased reliability and protection against critical equipment failures. This**

control transformer features a terminal block design that allows for hookup along with the ability to install fuse clips to the unit. The molded coil covers give this control transformer superior cooling abilities and a sleek appearance. The MT-CTX-380V-250VA-110V-50HZ complies with NEC / CEC and IEC standards.

**Transformer Features:** With a transformer rating of 250 VA (0.2 kVA), the MT-CTX-380V-250VA-110V-50HZ is a machine tool industrial single phase control transformer with primary voltage of 380V. It also provides a secondary voltage of 110 V. Featuring compact construction, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.


Connecting this unit is simple thanks to the terminal connection numbers being molded into the terminal block which corresponds to the nameplate and wiring diagrams. A unique fin-shaped, injection molded coil cover gives this unit superior cooling abilities. The unit also features a 130°C insulation class with a 80°C temperature rise.

**Benefits:** The MT-CTX-380V-250VA-110V-50HZ control transformer offers many benefits to the consumer. Full encapsulation of the windings and internal terminations ensures that the unit is protected from moisture, dirt, dust and other contaminants. Removable finger safe terminal covers contribute towards the overall clean and sleek look of the unit. The compact and innovative design features make this a great choice for industrial tool applications.

This control transformer has heavy steel mounting feet that are either welded or bolted to the core. This transformer features terminal block terminations.

**Applications:** Power Management, Industrial


Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com) to discuss your specific requirements.

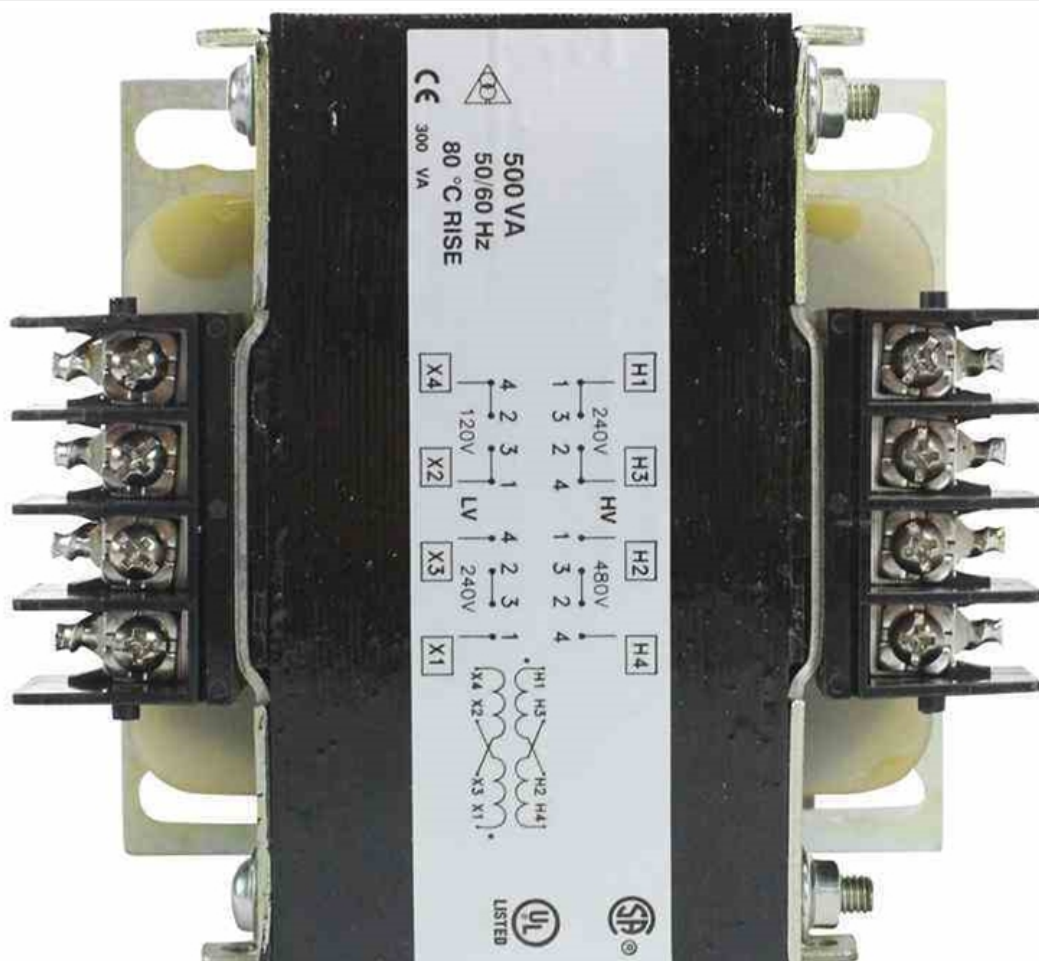

Larson Electronics LLC  
9419 E US HWY 175, Kemp, TX 75143  
Phone: 800.369.6671



[www.LarsonElectronics.com](http://www.LarsonElectronics.com)  
Email: [sales@LarsonElectronics.com](mailto:sales@LarsonElectronics.com)  
Fax: 903.765.7664

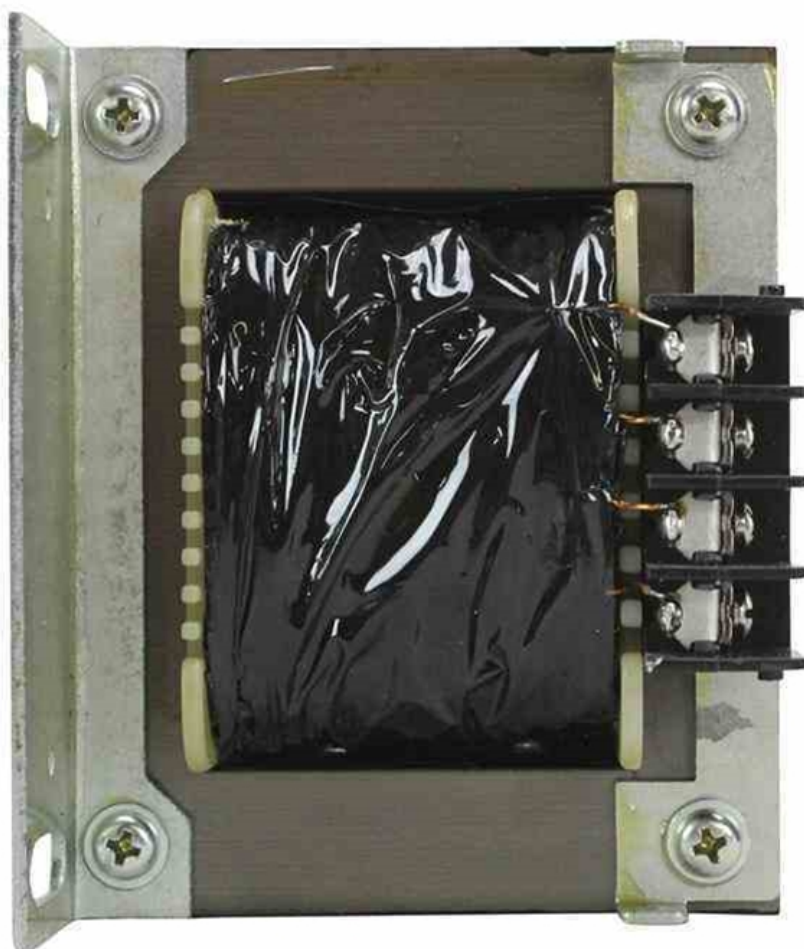



Larson Electronics LLC  
9419 E US HWY 175, Kemp, TX 75143  
Phone: 800.369.6671



[www.LarsonElectronics.com](http://www.LarsonElectronics.com)  
Email: [sales@LarsonElectronics.com](mailto:sales@LarsonElectronics.com)  
Fax: 903.765.7664



---

## Frequently Asked Questions (FAQ)

There are no Faqs