

PLM-PS

Pressure Switch for Pneumatic Light Masts

Product ID: 71618




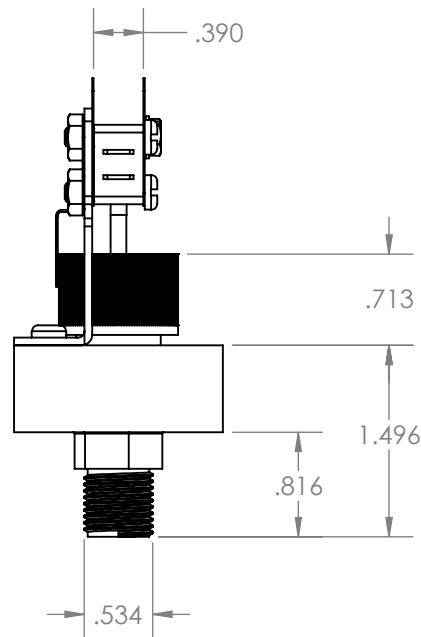


Image: PLM-PS

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

Pressure Switch for Pneumatic Light Masts

Set Point Pressure Range (psig): 3 to 40
Set Point Options: SPDT Customer Set
Max Amperage and Voltage: 15A 250V AC
Electrical Interface: 1/4" Terminal Blades
Maximum System Pressure (psig): 600
Materials: Zinc alloy & buna
Standard Fitting Size: 1/4" NPT
Weight: 10oz

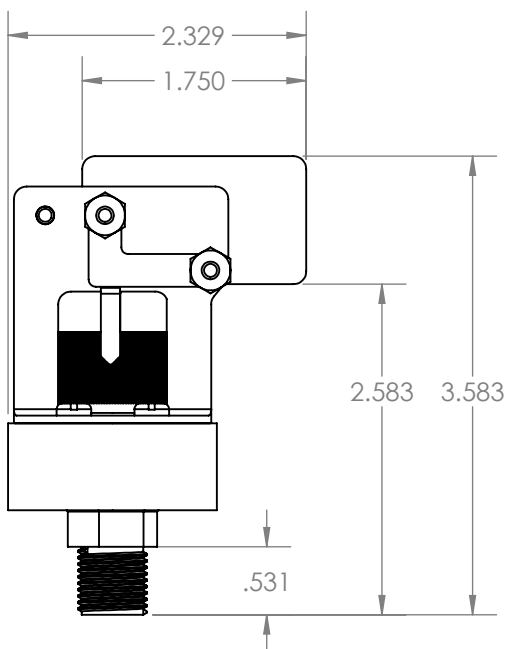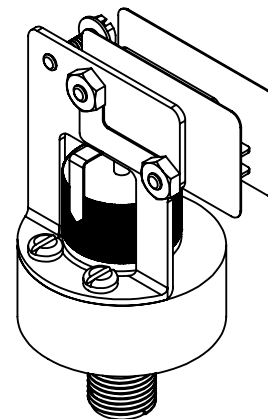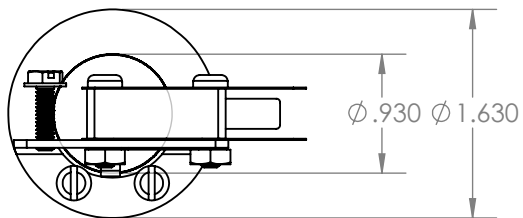

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

DIMENSIONS ARE IN INCHES		DRAWN		NAME	
MATERIAL		CHECKED		CHRIS THAUER	
DO NOT SCALE DRAWING				JEREMY BLANKENSHIP	

TITLE:					
PLM-PS					
SIZE	DWG. NO.			REV	
A					
SCALE: 2:3				SHEET 1 OF 1	











Frequently Asked Questions (FAQ)

There are no Faqs