THREE PHASE PAD MOUNT TRANSFORMER

PART# MT-PML-R2-3P-DMQ-1MVA-YE-RT-DF-B-6-B-B-M1


High Voltage		
Tap Position	**Voltage (V)**	**Current (A)**
1	13868	41.6
2	13530	42.7
3	13200	43.7
4	12870	44.9
5	12548	46.0

Low Voltage	
Voltage (V)	**Current (A)**
480	1202.8


Model No	**243791**
Rated Capacity	**1000 KVA**
Rated Voltage	**13.2-0.48 KV**
Impedence	**%**
Use Condition	**Outdoor**
Phase	**3 Phase**
Vector Group	
Rated Frequency	**60Hz**
Cooling Type	**KNAN**

Standard	**ANSI**
Product Code	**MT-PML**
Serial Number	
HV BIL	**125**
LV BIL	**30**
Temperature Rise	**65°C**
Oil Weight	**LBS**
Total Weight	**LBS**
Body Weight	**LBS**
Manufacture Date	

Wire Connection

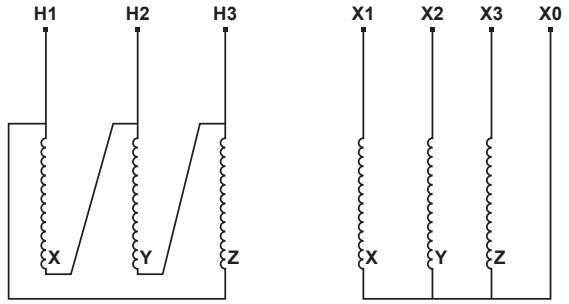

Phasor Diagram

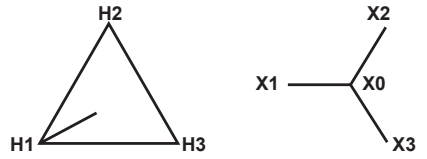

LARSON MAGNETICS