THREE PHASE PAD MOUNT TRANSFORMER

PART# MT-PML-R7-3P-DMP-300KVA-YT-LT-DF-A6-BF-CZ-2B4-M3


High Voltage		
Tap Position	**Voltage (V)**	**Current (A)**
1	14499	11.9
2	14145	12.2
3	13800	12.6
4	13455	12.9
5	13119	13.2

Low Voltage	
Voltage (V)	**Current (A)**
208	832.7


Model No	
Rated Capacity	**300 KVA**
Rated Voltage	**13.8/0.208 KV**
Impedence	**%**
Use Condition	**Outdoor**
Phase	**3 Phase**
Vector Group	**DYN11**
Rated Frequency	**60Hz**
Cooling Type	**KNAN**

Standard	**ANSI**
Product Code	**MT-PML**
Serial Number	
HV BIL	**150**
LV BIL	**60**
Temperature Rise	**65°C**
Oil Weight	**LBS**
Total Weight	**LBS**
Body Weight	**LBS**
Manufacture Date	

Wire Connection

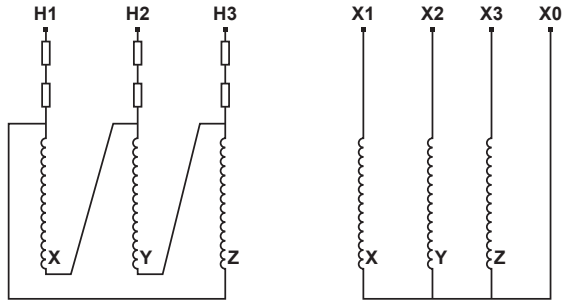

Phasor Diagram

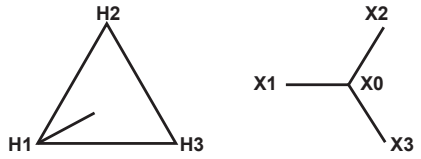

LARSON MAGNETICS