THREE PHASE PAD MOUNT TRANSFORMER

PART# MT-PML-R7-3P-GMR-500KVA-YE-LT-DF-A6-BB-CZ-2B4-M3


High Voltage		
Tap Position	**Voltage (V)**	**Current (A)**
1	13101	22.0
2	12782	22.6
3	12470	23.2
4	12158	23.7
5	11854	24.4

Low Voltage	
Voltage (V)	**Current (A)**
480	601.4


Model No	**XXX**
Rated Capacity	**500 KVA**
Rated Voltage	**12.47/0.48KV**
Impedence	**%**
Use Condition	**Outdoor**
Phase	**3 Phase**
Vector Group	**YY0**
Rated Frequency	**60Hz**
Cooling Type	**KNAN**

Standard	**ANSI**
Product Code	**MT-PML**
Serial Number	
HV BIL	**95**
LV BIL	**60**
Temperature Rise	**65°C**
Oil Weight	**LBS**
Total Weight	**LBS**
Body Weight	**LBS**
Manufacture Date	

Wire Connection

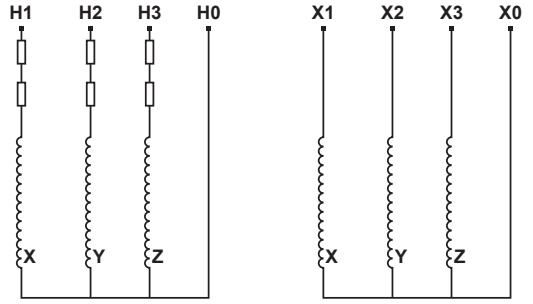

Phasor Diagram

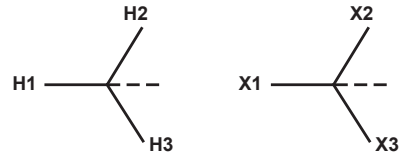

LARSON MAGNETICS