

EPL-PL-120-DB-1X-SP0000

Explosion Proof Device Box Cover with Pilot Light - Device Box Sold Separately

Product ID: 240373



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

Explosion Proof Pilot Light - 120 volts - Includes bulb. Device Box Not Included.

Lamp Input Type: 120V

Lamp Type: Incandescent

Bulb Type: 120MB - miniature bayonet base, 120V, maximum 6 watt

Lens Color: Red, Green, Blue, Amber, or White

Dimensions: Total Length - 4" Threaded Length - 1 3/8"

Hub Size: 3/4-14 NPSM threaded

Ratings:

Class 1 Divisions 1 & 2 Groups B, C, D

Class 2 Division 1 Groups E, F, G


Class 2 Division 2 Groups F, G

Class 3

NEMA 3, 7B7C, 7D, 9E, 9F, 9G

Ambient Temperature: -40°C to +50°C




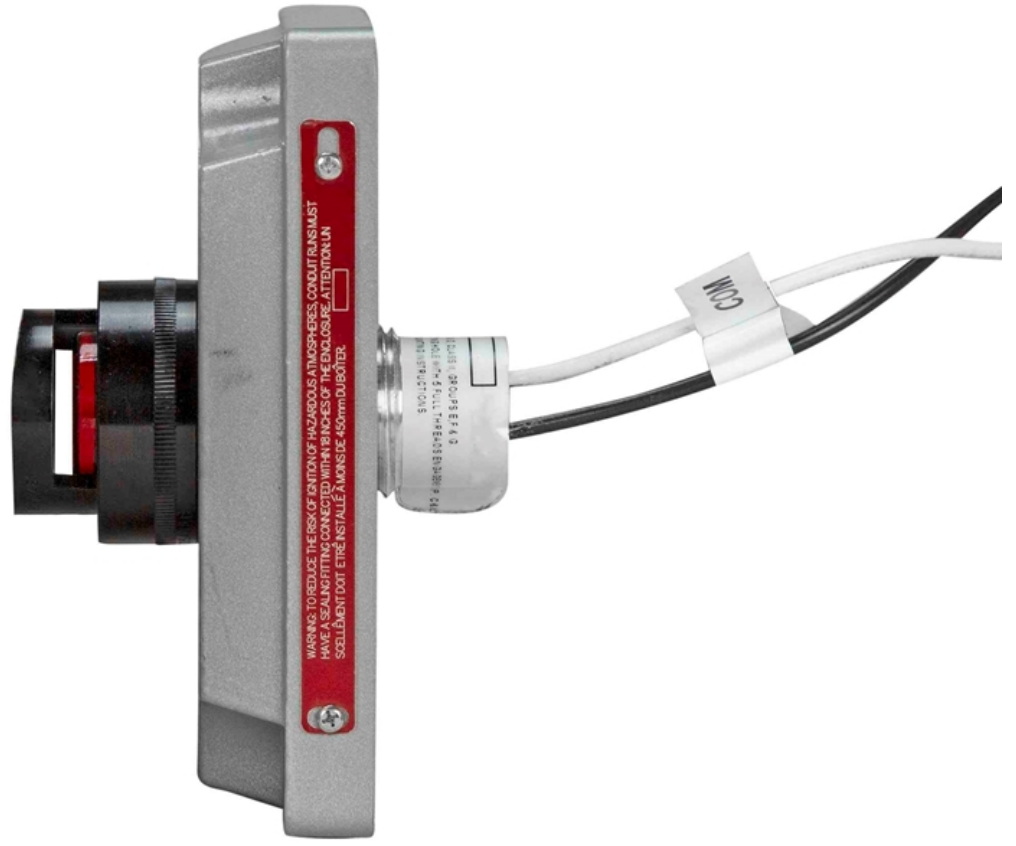

WARNING: TO REDUCE THE RISK OF EXPLOSION OF HAZARDOUS ATMOSPHERES, CONDUIT RUNS MUST
HAVE A SEAL FITTING CONNECTED WITHIN INCHES OF THE ENCLOSURE. ATTENTION: UN
SCÉLÉMENT DOIT ÊTRE INSTALLÉ À L'INTÉRIEUR DE 450mm DU BOÎTIER.

8V0127431-100
100% 4880010307841 11119 4444 1000
0 9413 547045 1 1070



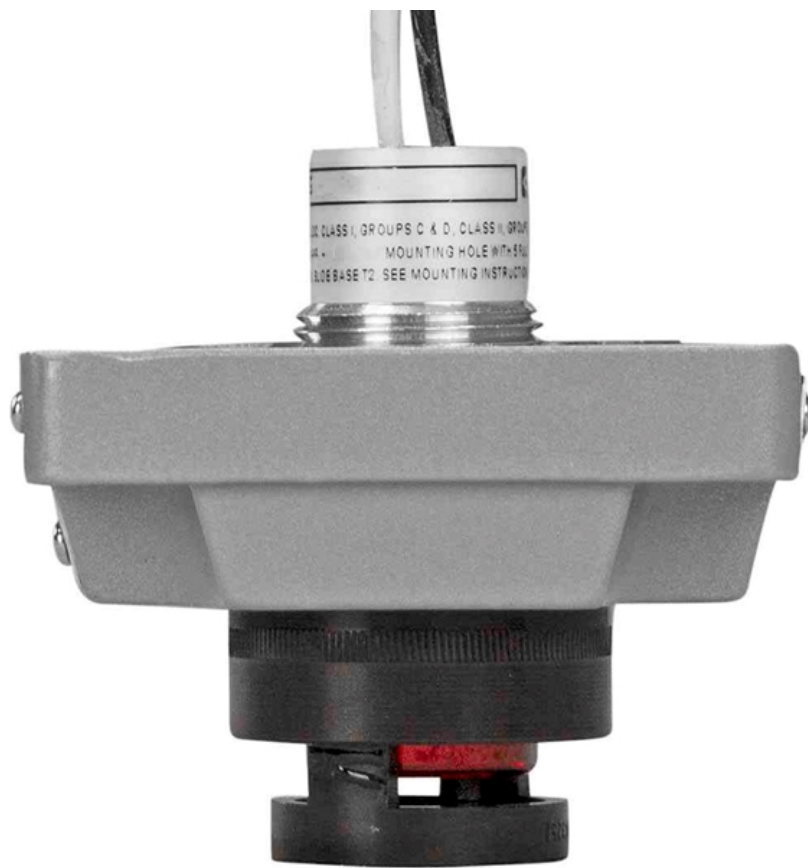

Frequently Asked Questions (FAQ)