


MT-UPM-R7-1P-GMA-75KVA-SZ-AB-Z6-BM-CZ-Z-M1

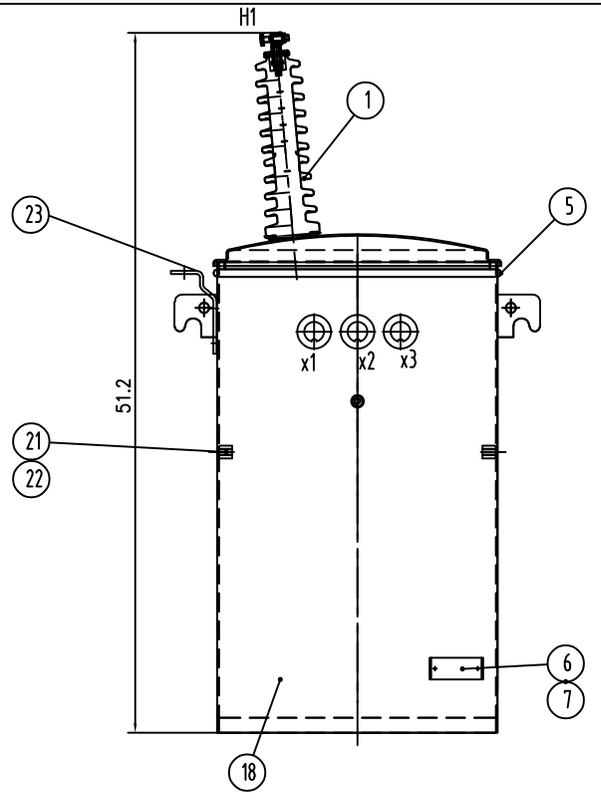


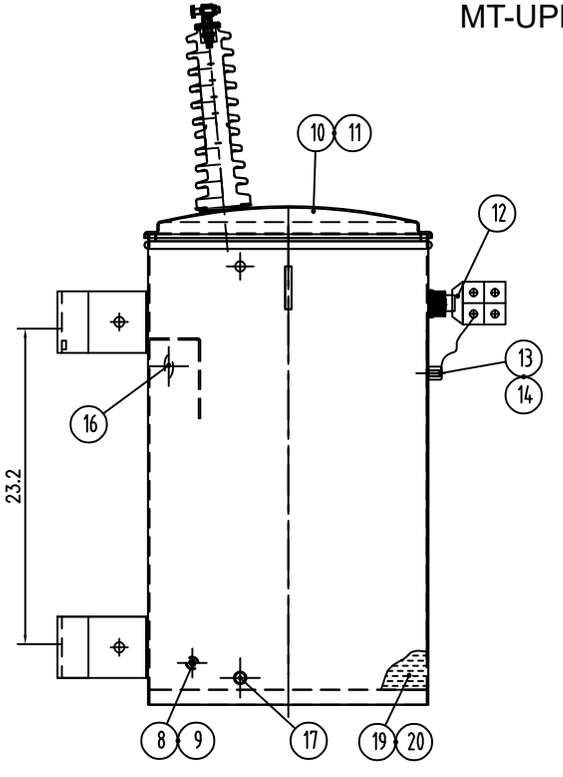

Approx. weight LBS

Untanked	Oil	Total
529	265	948

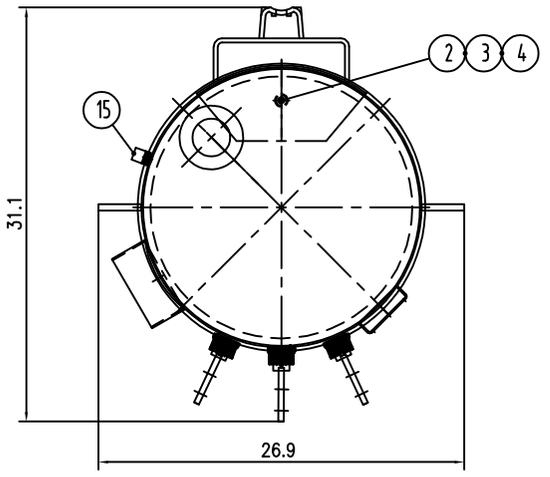

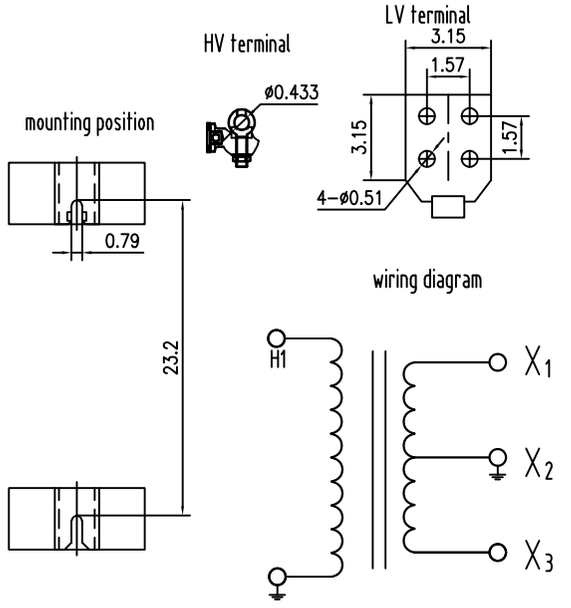

NO.	Code	Name	QTY	Material	Unit Weight	Total Weight	Remark
24		Painting		white			
23		Arrester bracket	1				
22		Washer 12	2				black coated
21		Bolt M12×35	2				black coated
20		Tank assembly	1				
19		Insulation oil	(1)				
18		Tank	1				
17		Oil drain valve	1				
16		Tap changer	1				
15		Pressure relief valve	1				
14		Washer 12	1				galvenized
13		Bolt M12×25	1				galvenized
12		LV bushing	3				4-hole spade
11		Sealing gasket	1				
10		Cover	1				
9		Washer 12	2				galvenized
8		Bolt M12×30	1				galvenized
7		ScrewM4X6	2				
6		Nameplate	1				
5		Hold down gear	1				
4		Ground strap	2	0.3 copper belt			INNER TANK
3		Washer 12	2				black coated
2		Bolt M12×20	2				black coated
1		HV bushing	1				

Mark	Revise	Revision	Signature	Date
Designed			Standard	
Checked			Examined	
Audited			Approved	
Crafted			Date	

Pole Mount TR

34500GrdY/19920V,
120/240V, 75kVA

pattern mark	mass	scale
		NOT
page		0 page

LARSON ELECTRONICS

Scan
Checked
0
Signature
Date