




Diagram for connect

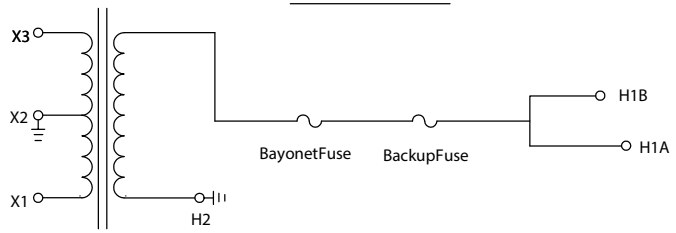

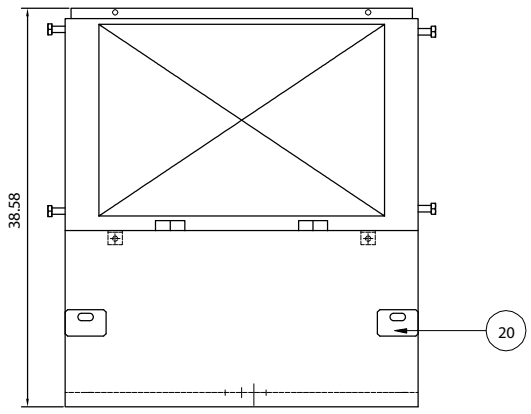

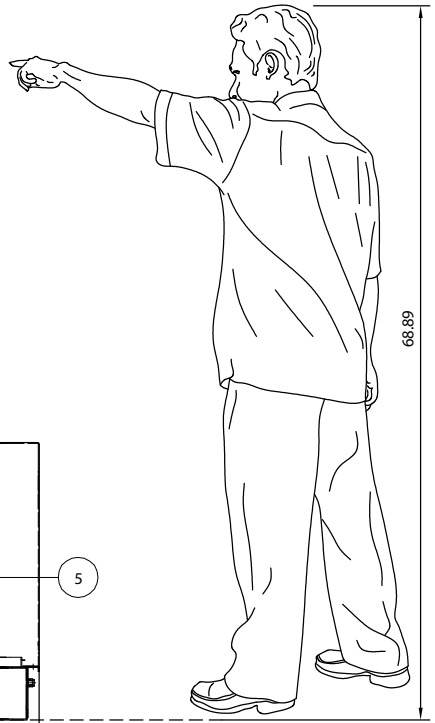

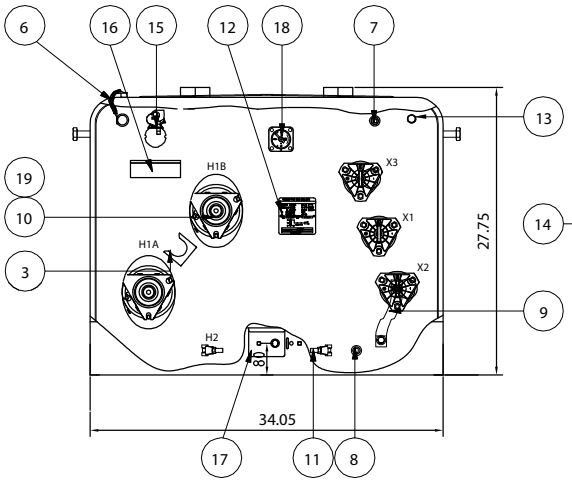

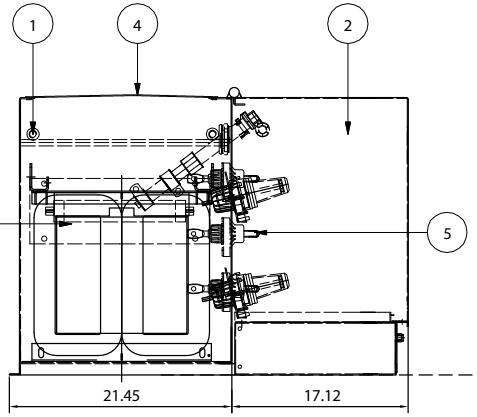

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	17200V
SECONDARY VOLTAGE(V)	120/240V
FREQUENCY	60Hz
POLARITY	ADDITIVE
WINDING MATERIAL	ALUMINUM
EFFICIENCY	99.11%
LOAD LOSS AT RATED VOLTAGE	≤441W
NO LOAD LOSSES	≤125W
IMPEDANCE	2%(±10%)
ALTITUDE	≤1000m
No. OF TAP POSITION	5 - (2) 2.5% Above/Below
COLOR	Munsell 7GY3.29/1.5
TRANSFORMER TANK	COATED STEEL
TANK COVER	COATED STEEL
ELECTRICAL CABINET	COATED STEEL

ITEM	WEIGHT
TANK & ACCESSORIES	396.83 LB
TOTAL OIL WEIGHT	200L
TOTAL WEIGHT	1234.59 LB

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	BOLT FOR LIFTING	4
2	HINGED DOOR	1
3	PARKING STAND BRACKET	1
4	FLIP TOP COVER	1
5	LV BUSHING(0.62-11 UNC-2A)	3
6	EQUIPOTENTIAL DEVICE	1
7	FILL PLUG	1
8	DRAIN VALVE	1
9	GROUND STRAP COPPER	1
10	HV BUSHING WELL(25KV,200A)	2
11	GROUNDING TERMINAL	2
12	NAME PLATE	1
13	PRESSURE RELIEF VALVE	1
14	ELSP FUSE	1
15	BAYONET FUSE	1
16	DRIP TRAY	1
17	PENTAHEAD BOLT ARRANGEMENT	1
18	OIL LEVEL GAUGE	1
19	INSERT WITH DUST CAP (25KV,200A)	2
20	CLAMP	2

Weights, gallons of fluid and dimensions are for reference only, and not for construction.

TITLE:

MT-PML-R2-1P-SNL-50KVA-SZ-LT-DF-A-6-BB-AZ-2B4-M2

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

LARSON ELECTRONICS

		NAME
DIMENSIONS ARE IN INCHES	DRAWN	
MATERIAL	CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING		

SIZE A | DWG. NO. | REV

SHEET 1 OF 1

5 4 3 2 1