PROTECTIVE LENS FILM

The LensGuard Adhesive Film Protector is intended to protect the lens from sand blasting and small rock chips. It acts like a pad and cushions as well as deflects sand and other debris that commonly pits and chips lenses.

Follow the basic installation steps below and remember that the film can be easily removed if you need to reposition it.

1. Clean the lens thoroughly with a lint free cloth and common glass cleaner. Let it stand for several minutes to air dry.

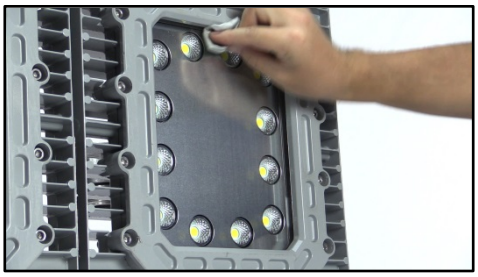

2. Remove the white paper backing revealing the adhesive on the back of the film. Do not let the film fold over on itself or touch anything.

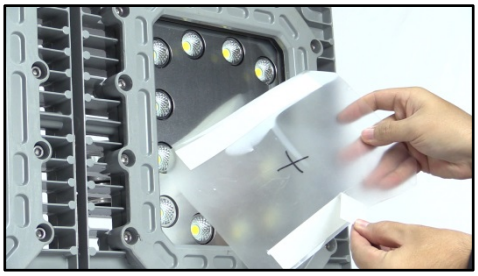

3. Align the lens film over the glass and apply pressure over the adhesive strips on each side. Small air bubbles will clear up over time as well as the cloudy look from the adhesive. In most cases, it will clear up in just a few hours of use.

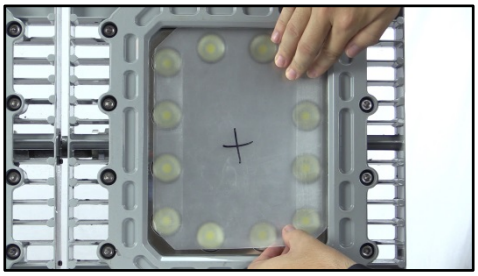

A mild soap and water will keep the film clean and clear. If you decide to run a different tint/clear film or if it becomes damaged it can be removed as easily as it was installed.



To protect the film and prolong its UV protection, it should be cleaned, and waxed with a standard carnauba type wax about every 3 months.

VIDEO GUIDE AVAILABLE ON PRODUCT PAGE