

150W Explosion Proof Ultraviolet LED Light Fixture - Class I, II, III - 20' SOOW Cord w/ EXP Plug

Part #: EPL-HB-100LED-RT-UVA-20C-EPP



The Larson Electronics EPL-HB-100LED-RT-UVA-20C-EPP Explosion Proof Ultraviolet light fixture provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries with UV cutoff filters. LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older incandescent, metal halide and high pressure sodium lights. Equipped with 20 feet of 16/3 SOOW cord and an explosion proof cord cap, this fixture uses advanced LED light technology to produce ultraviolet light and is T6 rated for hazardous locations where UV lamps are used in paint and adhesive curing, food inspection or for non-destructive testing.

This Class 1 Division 1 & 2, Class 2 Division 1 & 2 explosion proof UV light fixture provides 46,550 mW of high quality ultraviolet light while drawing only 150 watts. This high output UV LED fixture provides a 6,384 $\mu\text{W}/\text{cm}^2$ center beam maximum intensity at 12" while providing a minimum 2,660 $\mu\text{W}/\text{cm}^2$ intensity over a 14" by 14" area. The EEPL-HB-100LED-RT-UVA-20C-EPP is typically used for curing coatings or adhesives and for non-destructive testing applications. This fixture has been thoroughly tested with the DuPont line of ultraviolet curable paint and primers, accelerating the cure times over metal halide fixtures with surface temperatures as low as 55°F.

The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 50,000 hour rated lifespan with 80% intensity retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install. This fixture can operate on voltages ranging from 120V-277V 50/60Hz and is ETL approved for use in hazardous environments, paint spray booths, wet environments, and areas where UV lamps are used in paint and adhesive curing, food inspection, and for non-destructive testing.

[Click Photo to Enlarge](#)[Click Photo to Enlarge](#)

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twelve individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.


The EPL-HB-100LED-RT-UVA-20C-EPP uses ultraviolet LED light technology, a technology that is far better in energy saving than traditional fluorescent bulbs used for the same purposes. Traditional ultraviolet lights require a coating to block out visible light or a special composition of gases and chemicals used to create a higher concentration of ultraviolet light. This process, however, also produces many other wavelengths of light which go unused and end up as wasted energy. LED lights are unique in that they have a narrower wavelength band than traditional ultraviolet sources and therefore do not require these special coatings. As a result, LED lights do not produce unused, wasted light and therefore consume less energy than traditional UV lights on the market. LED lights have the added benefit of being capable of producing very specific wavelengths with tighter curves and are more durable and light weight as well. This eliminates harmful UV-B and UV-C wavelengths from being emitted from the light source, adding in productivity and safety during operation.

Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current applied and emitting light. With LED lights, there is no warm up time or cool down time before re-Striking and provide instant illumination when powered on, adding to the reliability of LED technology. By nature, LED light sources run significantly cooler than traditional lamps, reducing the chance of accidental burns and increased temperatures due to heat emissions. This solid state design of light emitting diodes provides a more reliable, stable, durable, and energy efficient light source over traditional lighting.

	<u>400W MH</u>	<u>100W LED</u>
Wattage	400 watts	100 watts
Amp Draw @ 120V AC	3.34 amps	0.84 amps
Amp Draw @ 24V DC	16.67 amps	4.17 amps
Lamp Life Expectancy	15,000	50,000+ Hours
Wavelength	320-400NM	350-380NM
Operation Cost per Year (8hs/day @ 11c/kWh)	\$138.12	\$32.12

The Class 1 & 2, Division 1 & 2 LED ultraviolet light fixture can be used for non-destructive testing in aviation and manufacturing, food processing and inspection, and in paint, coating, and adhesive curing. The EPL-HB-100LED-RT-UVA-20C-EPP provides operators in hazardous locations with a reliable and durable UV lighting solution that combines effective production of UV light with explosion proof protection and is applicable for leak detection, paint spray booths, ink, coatings, and adhesive curing, non-destructive testing, inspection, and food processing.

This light is universal voltage capable and can be operated with 100-277 VAC, 50/60Hz. We also offer a low voltage version of this LED fixture that operates on AC/DC voltages from 11-25 Volts. This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

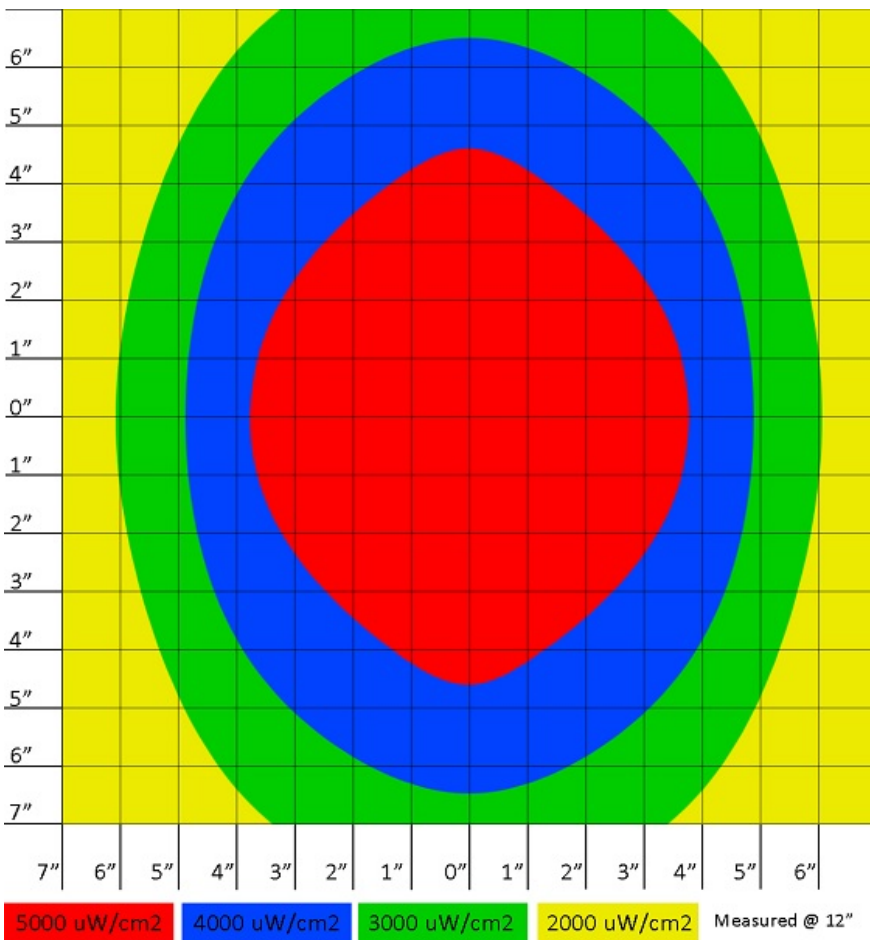

[Click Photo to Enlarge](#)

This LED light produces 46,550 mW with a wavelength curve of 350-380NM. The EPL-HB-100LED-RT-UVA-20C-EPP offers several mounting options including ceiling mounting, pendant mounting, wall mounting and cable mounting. The standard version of this explosion proof LED fixture includes a pendant mount and a surface mount option.

[Click Photos to Enlarge](#)

**5-15 Straight Blade Plug****5-20 Straight Blade Plug****6-20 Straight Blade Plug**

Wiring & Plug: This explosion proof UV light is equipped with 20 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an explosion proof cord cap for easy connection to explosion proof outlets. Plug options include a 5-15 15 amp straight blade plug for use with 120V explosion proof outlets, a 5-20 20 amp straight blade plug for use with 120V explosion proof outlets, or a 6-20 20 amp straight blade plug for use with 220-240V explosion proof outlets.

****PLEASE NOTE** Voltage ratings on plugs and outlets are MAXIMUM voltage. For low voltage applications, proper voltage must be applied to the outlet or damage to the light fixture will occur.**

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Specifications / Additional Information**EPL-HB-100LED-RT-UVA-20C-EPP - C1D1 Ultraviolet LED Light****Lamp Type:** LED**Dimensions:** 14"-H x 16"-W 5"-D**Weight:** 28lbs**Voltage:** 100-277 Volts AC, 50/60Hz**Total Watts:** 150W**Total Intensity:** 46,550 mW**Efficiency:** 350 mW/w**Lighting Configuration:** Flood Pattern**Lamp Life:** 50,000+ Hours**Color:** Ultraviolet- 365NM**Wavelength Curve:** 350-400NM - Peak @ 365NM**Temp Rating:** T5 -50C to +65C**Mounting:** 3/4" Pendant and Swivel Mount**Cord:** 20' 16/3 SOOW Cord w/ EXP Cord Cap**Cord Cap Options:** 5-15P, 5-20P, 6-20P**Ratings/Approvals**

Class I, Division 1 Groups C,D

Class I, Division 2 Groups A,B,C,D

Class II, Divisions 1&2 Groups E,F,G

Class III

T5 Temperature Rating

Certified to UL844 and C22.2 Standards

Paint Spray Booth Approved

LEL Approved

IP67 Rated Waterproof

Multiple Driver Banks

80% Intensity Retention after 50,000 Hours

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671**Intl:** 1-214-616-6180**Fax:** 1-903-498-3364**E-mail:** sales@larsonelectronics.com[Scroll Down to Purchase-](#)

This product does not qualify for free shipping.


Part #: EPL-HB-100LED-RT-UVA-20C-EPP (153307)

Options:

EPL-HB-100LED-RT-UVA-20C-EPP- CORD CAP

Example: EPL-HB-100LED-RT-UVA-20C-EPP-1523

CORD CAP	
5-15P	-1523
5-20P	-2023.125V
6-20P	-2023.250V

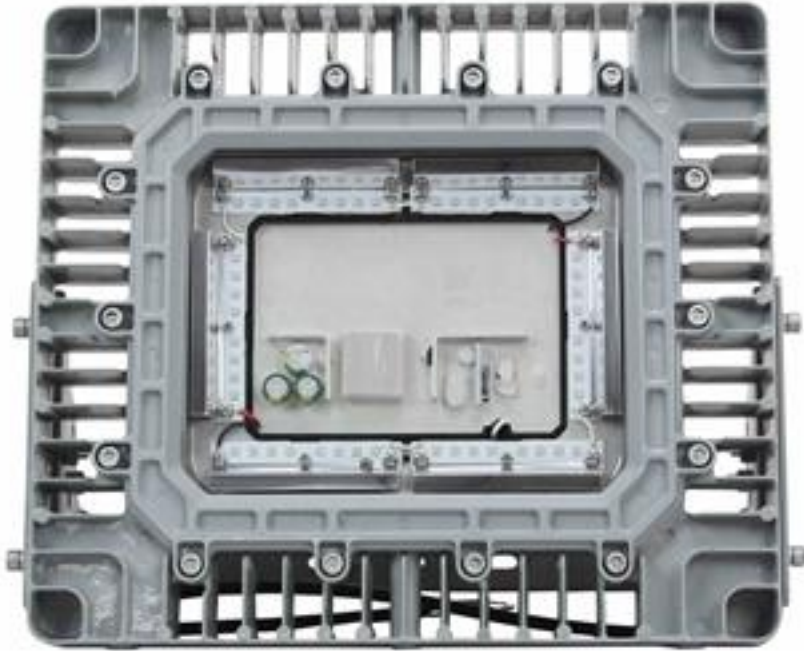







Links (Click on the below items to view):

- [Manual](#)
- [Hi-Res Image 1 - Industrial 150 Watt Ultraviolet LED Light Fixture \(Main\)](#)
- [Hi-Res Image 2 Industrial 150 Watt Ultraviolet LED Light Fixture \(Front\)](#)
- [Hi-Res Image 3 Industrial 150 Watt Ultraviolet LED Light Fixture \(Back\)](#)
- [Hi-Res Image 4 Industrial 150 Watt Ultraviolet LED Light Fixture \(Side\)](#)
- [Hi-Res Image 5 Industrial 150 Watt Ultraviolet LED Light Fixture \(Pendant Mounted\)](#)
- [Hi-Res Image 6 Industrial 150 Watt Ultraviolet LED Light Fixture \(Bracket 1\)](#)
- [Hi-Res Image 7 Industrial 150 Watt Ultraviolet LED Light Fixture \(Angle\)](#)
- [Hi-Res Image 8 Industrial 150 Watt Ultraviolet LED Light Fixture \(Bracket 2\)](#)
- [Hi-Res Image 9 Industrial 150 Watt Ultraviolet LED Light Fixture \(PND Back\)](#)
- [Hi-Res Image 10 Industrial 150 Watt Ultraviolet LED Light Fixture \(PND Front\)](#)