

C-SOOW-16-3

16/3 SOOW - 16 AWG 3-Connector Cable - 600V Rated - Industrial Service Cord

Product ID: 50806

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

C-SOOW-16-3 SOOW Cord

AWG Size: 16

Number of Conductors: 3

Stranding: 26/30

Strand Size: 0.0147

Insulation Wall: 0.045" Thickness

Amps: 13

Voltage: 600

Max Temperature: 90°

Conductor Material: Bare Copper

Insulation Material: EPDM

Jacket Material: PVC

Jacket Color: black

Ratings/Approvals

NRTL Certified to UL NEC Article 400

MSHA Approved

NRTL Certified to CSA

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA


This 16/3 SOOW 3-Connector Cable is 600V rated with an amperage of 13 amps and a temperature range of -40°C to 90°C. This SOOW cord is resistant to acid, water, abrasion, oils, solvents, weather, sunlight, and ozone, and offers excellent flexibility. This cord is designed for hard use with portable tools, industrial and processing equipment and for indoor and outdoor use in hazardous locations and explosion proof locations. This 16/3 SOOW cord is NRTL Certified to UL NEC Article 400, MSHA approved for flame resistance in mining applications, NRTL Certified to

CSA and RHS compliant.

Qty 1=1` of cable (specify number of feet when ordering)



Frequently Asked Questions (FAQ)

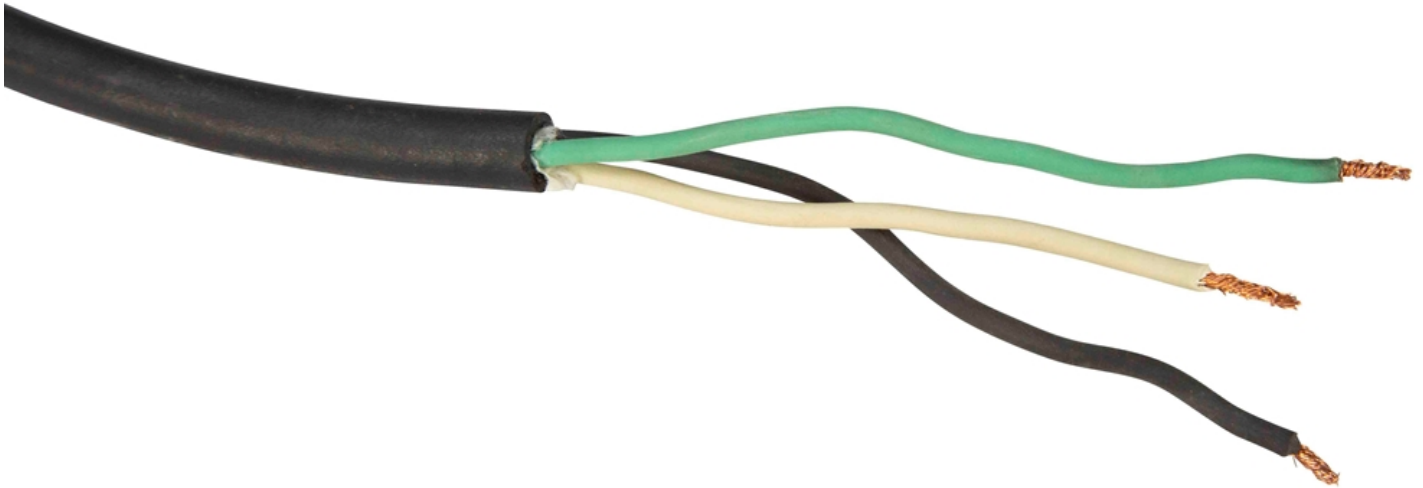

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [CE Certificate](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [Operations Manual](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)