Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

HALP-EMG-48-2L-T12HO

Hazardous Location Light Emergency Backup Fixture, Non-Metallic, 2 Fluorescent T12HO Lamps, Corrosion Resistant, Marine Application, C1D2/C2D2

Product ID: 64148

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

HALP-EMG-48-2L-T12HO - Hazardous Area Fluorescent Emergency Light

Listing: United States - Canada

Lamp Type: 4' Fluorescent
Surface Dimensions: 49.975"-L x 7.975"-W x 5.1"-H
Pendant Dimensions: 49.731"-L x 7.205"-W x 5.425"-H
Weight: 8 lb

Voltage: Universal 120-277V AC, 50/60 Hz
Total Watts: 120W
Total Lumens: 8100
Lumens on Battery Power: 900
Lamp Life (Hours): 12,000
Efficiency (Lumens per Watt): 67.5

Color Temp: 4100K
Replacement Lamp: -
Beam Angle: 160° Horizontal, 116.5° Vertical
Dimming Function: No
Lighting Configuration: Flood
Power Efficiency: -
Power Factor: -
Battery AC Input Voltage: 120/277V AC 60 Hz
Battery AC Input Current: 90 mA
Battery AC Input Power Rating: 9.5W
Battery Output Current: 120V @ 165mA - 277V @ 72mA
Illumination Time: 90+ Minutes

Ratings/Approvals

Listed for United States and Canada

Class I, Division 2, Groups A, B, C, D
Class II, Division 2, Groups F, G
NRTL Certified to UL 844
NRTL Certified to UL 924
NRTL Certified to UL 1598A Marine Type (Saltwater)
NRTL Certified to C22.2 No. 137
NRTL Certified to C22.2 No. 250.0
Meets USCG Specifications
California Title 24 Compliant
T6 Temperature Rating
Non-Corrosive Construction
Non-Metallic Housing Pan & Lens
Made in the USA
BAA Compliant
Silicone Free
CE Certified
Field Serviceable
Failsafe Lighting
Emergency Battery Backup
90+ Minute Runtime

Battery Type: High Temp, Maintenance Free, Nickel Cadmium
Battery Lifespan: 7 to 10 Years
Battery Charge Current: 250 mA
Battery Recharge Time: 24 Hours
Ambient Operating Temp Range: 0°C to +50°C
Operating Temp Rating: T6
Minimum Operating Temp: 0°C
Maximum Case Temp: +50°C
Housing Material: Fiberglass Reinforced Polyester Housing
Lens Material: Shatter/Impact Resistant Acrylic Diffuser
Gasket Material: Neoprene
Mounting: Flange Type Surface Mount or Pendant Mount
Wiring Hub: 1/2" or 3/4" NPT

Special Orders - Special Requirements
Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in the USA

The HALP-EMG-48-2L-T12HO from Larson Electronics is a Hazardous Area Fluorescent Light Emergency Fixture that is U.S./Canada approved Class I Division 2 Groups A, B, C and D and is specifically designed to handle the rigors of wet and corrosive marine environments. This hazardous location fluorescent light has a T6 temperature rating and carries a United States Coast Guard approval, making it ideal for applications such as oil rigs, ships, offshore applications, petrochemical, manufacturing, chemical storage, and water treatment centers.

This four foot long, two lamp fluorescent fixture is ideal for operators seeking a top quality hazardous location light that will reduce operating costs, improve lighting quality, and reduce downtime incurred from frequent servicing intervals. The HALP-EMG-48-2L-T12HO hazardous area fluorescent light fixture is designed for use in wet areas and saltwater-marine environments where corrosion resistance is critical to equipment longevity and safety. This Class I Division 2 rated fixture is constructed of non-corrosive materials including a polyester housing reinforced with glass fiber, a poured in gasket for reliable sealing, and an impact resistant acrylic diffuser. Corrosion resistant plastic latches secure the lamp cover to the housing and provide a firm lock against the poured in seal to prevent drips and water intrusion.

This emergency backup fluorescent light works, mounts, and is wired like our HALP-48-2L explosion proof fluorescent light fixtures. The main difference is that we add a battery backup unit that adds emergency light functionality to the fixture. This hazardous area emergency light will illuminate when there is a loss of power, and will run the standard UL suggested 90 minutes after power is lost. The light recharges the battery once electrical power is restored. Standard configuration includes a single emergency ballast that will run a single lamp at 900 lumens for 90 minutes. The battery backup unit includes a switched leg for turning the light fixture on/off without kicking the unit into emergency mode.



Click Photo to Enlarge



Click Photo to Enlarge



Click Photo to Enlarge







NOTE ON LAMPS: This fixture comes equipped with two T12HO fluorescent lamps. The F48-T12/HO 60 watt lamps produce 4050 lumens per bulb for 8100 lumens per fixture, and a 12,000 hour rated service life. The HALP-EMG-48-2L-T12HO has an electronic universal voltage ballast and operates on a range of voltages from 120V to 277V AC 50/60 Hz including: 120 Volt 60 HZ, 220 Volt 50 HZ, 240 Volt 60 HZ and 277 Volts 60 HZ.
The HALP-EMG-48-2L-T12HO is NRTL Listed to UL 844 for Class I Division 2, Groups A, B, C, D hazardous locations. This fixture is also NRTL Listed to UL 1598A for outdoor marine type luminaires, and meets US Coast Guard specifications. This light fixture offers the extreme durability in a proven hazardous location fixture design, making it a reliable and affordable lighting solution for open areas where flammable chemicals and vapors may occasionally be present.
Click here to read the NEC description for explosion proof and hazardous locations.
Mounting Options: Unless otherwise specified, our standard, most popular configuration is the flange mount shown enlarged below. We also offer a pendant mount for those needing to suspend the fixture away from the ceiling surface (i.e. suspend from pipe or conduit). Additional mounting configurations can be customized to meet the requirements on the application. Please contact us for special mounting configurations.



Surface Mount (Standard)
Click Photo to Enlarge

Standard Flange Brackets: Flange type stainless steel mounts attached at each end of the fixture enables it to be simply secured to any surface. The mounts provide some shock absorbency protection while enabling the user to simply mount the fixture with the through-hole taps that protrude on each side of the fixture. The mounting holes are 38.25" on center apart along the top of this hazardous location light. The mounting holes are 7.2" on center across the top of the light.



Pendant Mount (Optional)
Click Photo to Enlarge

Standard Suspension Mounting: Pendant mount fixtures hang from the ceiling and are suspended by rigid pipe. Each fixture is equipped with either two 1/2" or two 3/4" NPT hubs, one on each end of the fixture. Operators bring rigid pipe down to the threaded mounting hubs. Wiring is fed down through the rigid pipe to one of the NPT hubs and tied in to the fixture's lead wires, completing the

electrical connection. The remaining pendant hub provides support for the opposite end of the fixture.


Suggested Applications: The HALP-EMG-48-2L-T12HO is designed for marine wet and damp locations, where corrosion resistant fluorescent lights are required. This includes petrochemical facilities, lubrication pits, oil drilling rigs, crew quarters, solvent/cleaning areas, water treatment areas, processing plants, and marine loading docks.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364


Frequently Asked Questions (FAQ)

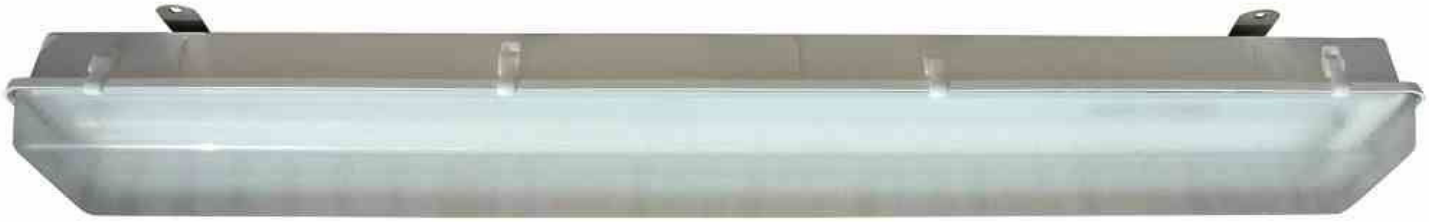

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



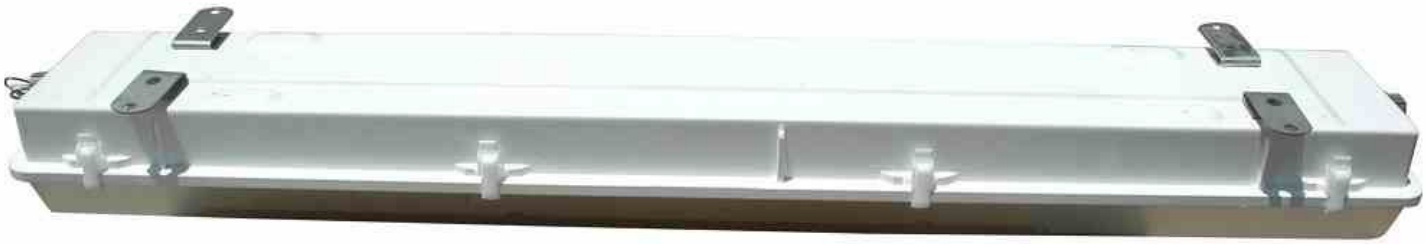

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

HALP-EMG-48-2L-T12HO

Product ID: 64148

Export Control Classification Number (ECCN): EAR99

Options:

HALP-EMG-48-2L-T12HO-Mount-Hub Config

Example: HALP-EMG-48-2L-T12HO-SFC-0.5IN

Mount	
SURFACE	-SFC
PENDANT	-PND

Hub Config	
1/2IN	-0.5IN
3/4IN	-0.75IN

Links (Click on the below items to view):

- **Dimensional Drawing 2D**
- **MSDS (Material Safety Data Sheet**
- **Operations Manual**
- **Solidworks EASM File**
- **STEP File (3D CAD Model)**
- **USA NEC Certificate (Commonly referred to as UL Certificate)**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **HigResPic5**
- **HigResPic6**
- **HigResPic7**
- **HigResPic8**
- **Video1**
- **Video4**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**