

**20 Watt Ultraviolet LED Emitter - 365NM - 4 UV LEDs - NDT - 9-42VDC - Extreme Environment**

Part #: [LEDLB-4E-UV-365NM](#)



**Buy American Compliant**

The Larson Electronics LEDLB-4E-UV-365NM LED Light Bar offers high light output and extreme durability combined with versatile mounting and power options. This IP68 rated LED light bar is waterproof to three meters and produces ultraviolet 365nm light while drawing only 20 watts of power @1.67 amp from a 12 volt electrical system. This light can run on any voltage from 9 to 42 volts and provides an extremely rugged lighting solution that is ideal for use in commercial marine environments as well as industrial and manufacturing applications such as machine vision system lighting, heavy equipment illumination, blasting lighting and mining operations.

The LEDLB-4E-UV-365NM LED light bar from Larson Electronics produces UV light in the 365 nanometer spectrum with a 50mW intensity. Four five watt LEDs producing 12.5 mW/cm<sup>2</sup> each are arranged in rows and paired with high purity 10 degree optics to produce a tightly focused spot beam with limited spread or light spillage. We also offer optional floodlight versions with 35 degree optics to produce a wider beam spread and more light over a larger area nearer the fixture, making flood versions ideal for use as work and area lights. These LED light bars are IP68 rated and waterproof to 3 meters, sealed against intrusion by dust and dirt and very ruggedly constructed to withstand the most demanding environments, conditions and applications. The entire Larson Electronics LEDLB-E series are constructed of extruded aluminum and feature heavier housings, rubber isolated mounts and unbreakable polycarbonate lenses to provide increased durability against vibrations, impacts, waves, hard rains, sand and high winds.



[Click Photo to Enlarge](#)

**Heat Management:** Heat is the single largest factor in premature LED failure and color shifting. As a result, many manufacturers reduce the output of their LEDs to reduce the amount of heat produced. These LED light bars utilize an extruded aluminum housing that incorporates an advanced heat radiating fin design which dissipates heat efficiently to produce the maximum amount of power and longevity from the integrated Edison Edixeon® Emitters. The end result is more light and longer LED life with higher average lumen maintenance after 50,000 hours.


**Voltage Control:** These units are able to monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. These LEDLB series light bars can operate on current ranging from 9 to 42VDC without any modifications necessary as a result. This multi-voltage capability makes these units ideal for mobile and standalone applications such as those found on commercial boats, heavy equipment and vehicles where power systems don't always operate with 12 volts and external generators, transformers or inverters are impractical.

**LEDLB-4E-UV-365NM35° Flood Beam (Opt)**



[Click Photo to Enlarge](#)

**LEDLB-4E-UV-365NM10° Spot Beam (Std)**

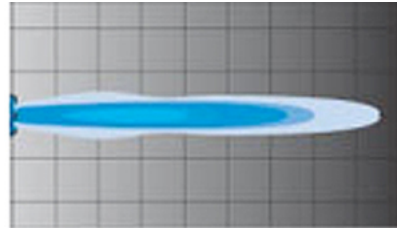

**Durability:** The LEDLB-E series of LED light bars from Larson Electronics offer IP68 rated construction that is designed to withstand extremes of environmental and operating conditions. The LED lights with the 'E' part number designation are designed for extreme durability and are larger and nearly twice as heavy as their standard counterparts. These units can withstand rapid temperature changes of -40 degrees Celsius to 85 degrees Celsius, are waterproof to three meters and resist ingress of dust, dirt and humidity. The housings are formed from thick extruded aluminum and the lenses are unbreakable polycarbonate. The Edixeon® LEDs offer inherent LED resistance to shocks and vibrations contributing to these units 15.6Grms rating of vibration tolerance. We recommend these LED lights for high stress - high vibratory conditions, high humidity climates, very cold areas and rough saltwater conditions. They are also well suited to environments where equipment is used in one temperature extreme and stored in another temperature extreme.

**Mounting:** Larson Electronics LEDLB series light bars are equipped standard with aluminum mounting blocks which slide within the aluminum housing to allow users to adjust their positioning to match existing or user drilled mounting holes. Each aluminum mounting block has an integrated rubber bushing to absorb vibrations and shocks. To secure the lights in place users simply slide the mounting bolts through the aluminum mounting block and rubber isolator, through the mounting surface, then secure the bolt with a locking nut on the opposite side of the mounting surface. This mounting system enables mounting to flat or round surfaces and allows for minimal 7 degrees of flexibility of angle placement of the light. In this LED emitter light bar model, an additional mounting option is provided. The adjustable, shock insulated mounts are attached to a simple, inverted u-bracket type mount. The LED light bar can then be mounted via a single 3/8 bolt through the center of the bracket. We also offer a BC-2 bar clamp mounting system [you can view here](#) for even greater mounting versatility.

**Note:** Most Larson Electronics LEDLB, LEDP3W, LEDP10W, and LED10W series LED spotlights and floodlights are terminated with a Deutsch IPD / LADD DT04-2P connector. The mating connector plug is DT06-2S. Most LEDLB and LED10W series lights ship with mating connector as part of a harness or pigtail, depending on the model. Some larger LED lights like the LEDLB-160X2 or LEDLB-200X2 or multiple function LED lights (i.e. high/low beam, modulating, IR/Visible combos) will have different Deutsch connectors.

**Intensity:**

50 mW/cm<sup>2</sup> (50,000 μW/cm<sup>2</sup>) in a spot configuration measured at 12".

6 mW/cm<sup>2</sup> (6,000 μW/cm<sup>2</sup>) in a flood configuration measured at 12".

**Specifications / Additional Information****LEDLB-4E-UV-365NM LED Light Bar****LEDs:** (4) 5 Watt UV LED Emitters**Dimensions:** 4"-L 3"-H 3.56"-D**Watts:** 20**Voltage:** 9-42 VDC**Weight:** 2.4 Lbs**Lighting Configuration:** 10° Spot or 35° Flood**Mounting:** Stud Bracket**Wiring:** Deutsch IPD / LADD DT04-2P connector**Amps:** 1.67 (on 12 volts) .84 (on 24 volts)**LED Light Color:** Ultraviolet (365NM)**Intensity (Spot):** 50 mW/cm<sup>2</sup> @ 12"**Intensity (Flood):** 6 mW/cm<sup>2</sup> @ 12"**LED Life Expectancy:** 50,000 hours**Optics Efficiency:** 90%**Materials:** Aluminum Housing, Polycarbonate Lens**Housing Colors:** Black**CE Certified**

3 year warranty replacement on this LED light. After 30 days, the customer ships the failed LED light and/or LED bulb to Larson Electronics at their expense. If the failure is a manufacturer defect, we will ship a new replacement to the customer. If failure occurs within 30 days of receipt, Larson Electronics will provide a return label via email to the customer. When the failed light is returned, Larson Electronics will ship a new replacement.

**Scroll Down to Purchase-**

[This product does not qualify for free shipping.](#)

[Part #: LEDLB-4E-UV-365NM \(68931\)](#)

**LEDLB LED Features**

5 Watt LED Emitters

LEDs Driven At 80%

-40 C~ +80C Operating Temp Range

RoHS Compliant

70% Lumen Retention @65,000 hours

LED Chip Op Temp -40C to +125C

IP68 Rated Waterproof to 3 meters

**Special Orders- Requirements**

Contact us for special requirements

**Toll Free:** 1-800-369-6671**Intl:** 1-903-498-3363**E-mail:** sales@larsonelectronics.com

Options:

LEDLB-4E-UV-365NM- BEAM CONFIG

Example: LEDLB-4E-UV-365NM-SP

BEAM CONFIG	
10° Spot	-SP
35° Flood	-FL









Links (Click on the below items to view):

- [Dimensional Drawing](#)
- [Manual](#)
- [SpectrumChart](#)
- [STEP](#)
- [Hi-Res Image 1 - Front view of 20 Watt Ultraviolet LED Emitter](#)
- [Hi-Res Image 2 - Side view of 20 Watt Ultraviolet LED Emitter](#)
- [Hi-Res Image 3 - Back view of 20 Watt Ultraviolet LED Emitter](#)
- [Hi-Res Image 4 - Deutsch Connector for 20 Watt Ultraviolet LED Emitter](#)