

EPL-48-4L-UV

Explosion Proof 160 W Class 1 & 2 Fluorescent UV Light With 4 Lamps - Class 1 Division 1

Product ID: 71471



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-48-4L-UV Explosion Proof Ultraviolet NRTL Listed for United States & Canada

Dimensions: W-25.241" L-52.262" H-9.82 "

Weight: 65Lbs

Total Watts: 160 watts - (4) 40 watt lamps

Voltage: Multi- 120V-60hz 220V-50hz 240V-60hz 277V-60hz

Total Intensity: 32.4 mW - (4) 8.1 mW lamps

Lamp Life Expectancy: 5,000 hrs

Efficiency: T8 UV Bulbs:N/A

Ambient Operating Temp Range: -20C to 70C

Operating Temp Rating: T6 Rated

Minimum Operating Temp: -20 C

Maximum Case Temp: 70 C

Beam Angle: N/A

Color: Ultraviolet- 400nm-315nm,315nm-280nm, 280nm-100nm

Mounting: Bracket Standard - Pendant Optional

Wiring Hub: 1/2 inch threaded

*Wattage totals vary with different lamp options.

Ratings

Class 1 Division 1, Groups C and D

Class 1 Division 2, Group A,B,C,D

Class II Division 1- 2, Groups E,F,G

NRTL Certified to UL 844, 924

NRTL Certified to UL 1598 Marine Type

NRTL Certified to UL 595 Outdoor Marine Type
(Saltwater)

California Title 24 Compliant

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics EPL-48-4L-UV 160 Watt Explosion Proof UV Fluorescent Light Fixture is NRTL Listed for United States and Canada for Class 1 Division 1 & 2 and Class II Division 1 & 2. This fixture uses a special ballast and bulb combination to produce ultraviolet light. This lamp is T6 rated and ideal for hazardous locations where

UV lamps are used to cure coatings and adhesives or as germicidal agents.

*****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS HAZARDOUS LOCATION LIGHT FIXTURE*****

The EPL-48-4L-UV fixture is a 4 foot long, 4 lamp, Class 1 Division 1 Groups C & D, Class 1 Division 2 Groups A, B, C & D, and Class II Division 1 & 2 Groups E, F, and G explosion proof fluorescent light that emits light in the ultraviolet spectrum. The EPL-48-4L-UV is made to order and can be configured to produce UVA, UVB or UVC light and is typically used for curing coatings or adhesives, pest management, and germicidal applications. The 4 UV lamps are protected by heat and impact resistant Pyrex tubes and the fixture is constructed of copper free aluminum alloy. The lamp reflectors are corrosion resistant heavy gauge aluminum coated with a high gloss reflective finish. This fixture can operate on voltages ranging from 120V-277V 50/60Hz and is for use in paint spray booths and wet locations.

The EPL-48-4L-UV can be configured for UV-A, UVB or UV-C light. Typical applications for UVA are paint curing, resin curing, and non destructive inspection. UV-B lights are typically used in medical applications, such as sterilizing surgical equipment, and UV-C is typically used in germicidal applications, such as disinfection of surfaces and water purification.

The EPL-48-4L-UV Explosion Proof Light Fixture is a quicker and more efficient alternative to the traditional solvent and water drying thermal curing process. The UV curing processes is much quicker than the alternative method and is more abrasion resistant, has no loss of coating thickness, and produces less environmental pollutants. The quick curing of UV lights most importantly eliminates the chances of dust and pollutants entering the coated surface, which increases the overall production speed of the curing process.

This Class 1 & 2, Division 1 & 2 UV light fixture can be used for non-destructive testing, commonly found in radiology, aviation, power plants, manufacturing, pipelines, and food processing applications and is a method of inspection which uses UV light to detect deficiencies (i.e., cracks) in a particular element, part of a system, or a whole system. Non-destructive testing is a useful instrument for testing the properties of a particular material without causing permanent damage to the material itself. This inspection method is utilized in many industrial fields, such as in welding, where the processes can be used to detect unseen cracks that can potentially lead to structural fatigue.

This fixture can be used for ultraviolet light inspection in the food processing industry to check for physical defects and other aberrations in food, such as the existence of bugs or other contaminants. Application of UV lights to foods not only helps indicate potential defects in food, it also helps remedy the problem by killing these unwanted pathogens and ensuring that each food item meets consumer expectations and quality control.

The EPL-48-4L-UV provides operators in hazardous locations with a reliable and durable UV lighting solution that combines effective production of UV light with explosion proof protection and is applicable for leak detection, paint spray booths, ink, coatings, and adhesive curing, and germicidal applications, as well as for non destructive testing for inspection, i.e., food manufacturing and sanitation.

Ultraviolet Wavelength Options: Ultraviolet A Wavelength produces a longer wave between the 400nm - 315nm spectrum.

Ultraviolet B Wavelength produces a shorter wave than the UVA wavelength.

These medium sized waves range from 315nm - 280nm.

Ultraviolet C wavelength is reduced exceptionally. Some refer to this wave as the `germicidal` wave. The Ultraviolet C Wavelength ranges from 280nm - 100nm.



[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

Mounting Options: Unless otherwise specified, our standard, most popular configuration is the bracket end mounting shown enlarged below. We also offer a pendant mount for those needing to suspend the fixture away from the ceiling surface (i.e. suspend from pipe or conduit). Additional mounting configurations can be customized to meet the requirements on the application. Please contact us for special mountings.

Adjustable Surface Mount Brackets: Each bracket is cinched to the bracket mounting peg on each side of the light. The angle of the bracket is set by tightening two cap screws on either side of the bracket. The cap screws act as a set screw. The bracket itself is mounted via a single bolt hole at the top the bracket. There are two brackets, one on each end of the light. Once the brackets are mounted to a surface (ceiling, floor or wall), the light fixture can be removed from the brackets by loosening the cap screws that hold the bracket to the mounting peg.

Suspension Mounting: Pendant mount fixtures hang from the ceiling and are suspended by rigid pipe. Each fixture features a 1/2" NPT junction box on one end, and a 1/2" NPT adjustable L-bracket on the other end of the fixture. Operators bring rigid pipe down to the threaded mounting hubs. Wiring is fed down through the rigid pipe to the junction box and tied in to the fixture's lead wires, completing the electrical connection. The adjustable L-shape mounting bracket provides support for the opposite end of the fixture.

This fixture is NRTL Listed for Class I, Division 1 Groups C and D, Class I, Division 2 Groups A, B, C and D, Class II, Division 1 and 2, Groups E, F and G.

Made in USA Quality

Lamp Options


1. Each unit dialectically tested.
2. Fixture arrives assembled and lamped to reduce installation time and cost. Adjustable mounting brackets enable the operator to choose any mounting angle for the fixture, where other models may only offer one or three choices.
3. Fixture constructed of extruded corrosion resistant copper free aluminum alloy.
4. Over-sized, finned ballast housing for 800 mA fixtures provides more heat dissipation and extends ballast life. Ballast housing easily accessible and externally mounted. Top and bottom covers secured with nuts and bolts, instead of threaded through holes, which can be damaged with dirt.
5. Heavy gauge extruded aluminum reflectors with high gloss reflective finish. Resists dents and corrosion.
6. A wrench is used to unscrew the end caps for relamping the fixture, while other models require the "tap and knock off" method to loosen the end cap.
7. Explosion proof, impact and heat resistant Pyrex tubes provide lamp protection.

Lamp options for UV fixtures are determined by UV range. Operators can specify when ordering- UVA (-A part number suffix), UVB (-B) and UVC (-C suffix). F40T8 bulbs designed for UV applications are used. The bulb and ballast in our UV fluorescent fixtures are unique to UV applications.
UVA(-A) 400nm - 315nm
UVB (-B) 315nm - 280nm
UVC (-C) 280nm - 100nm

	8	7	6	5	4	3	2	1
	REV	DESCRIPTION						DATE
	A	PRODUCTION RELEASE						04-01-2024
EPL-48-4L-UV-A-SFC 								
	8	7	6	5	4	3	2	1

EPL-48-4L-UV-A-SFC



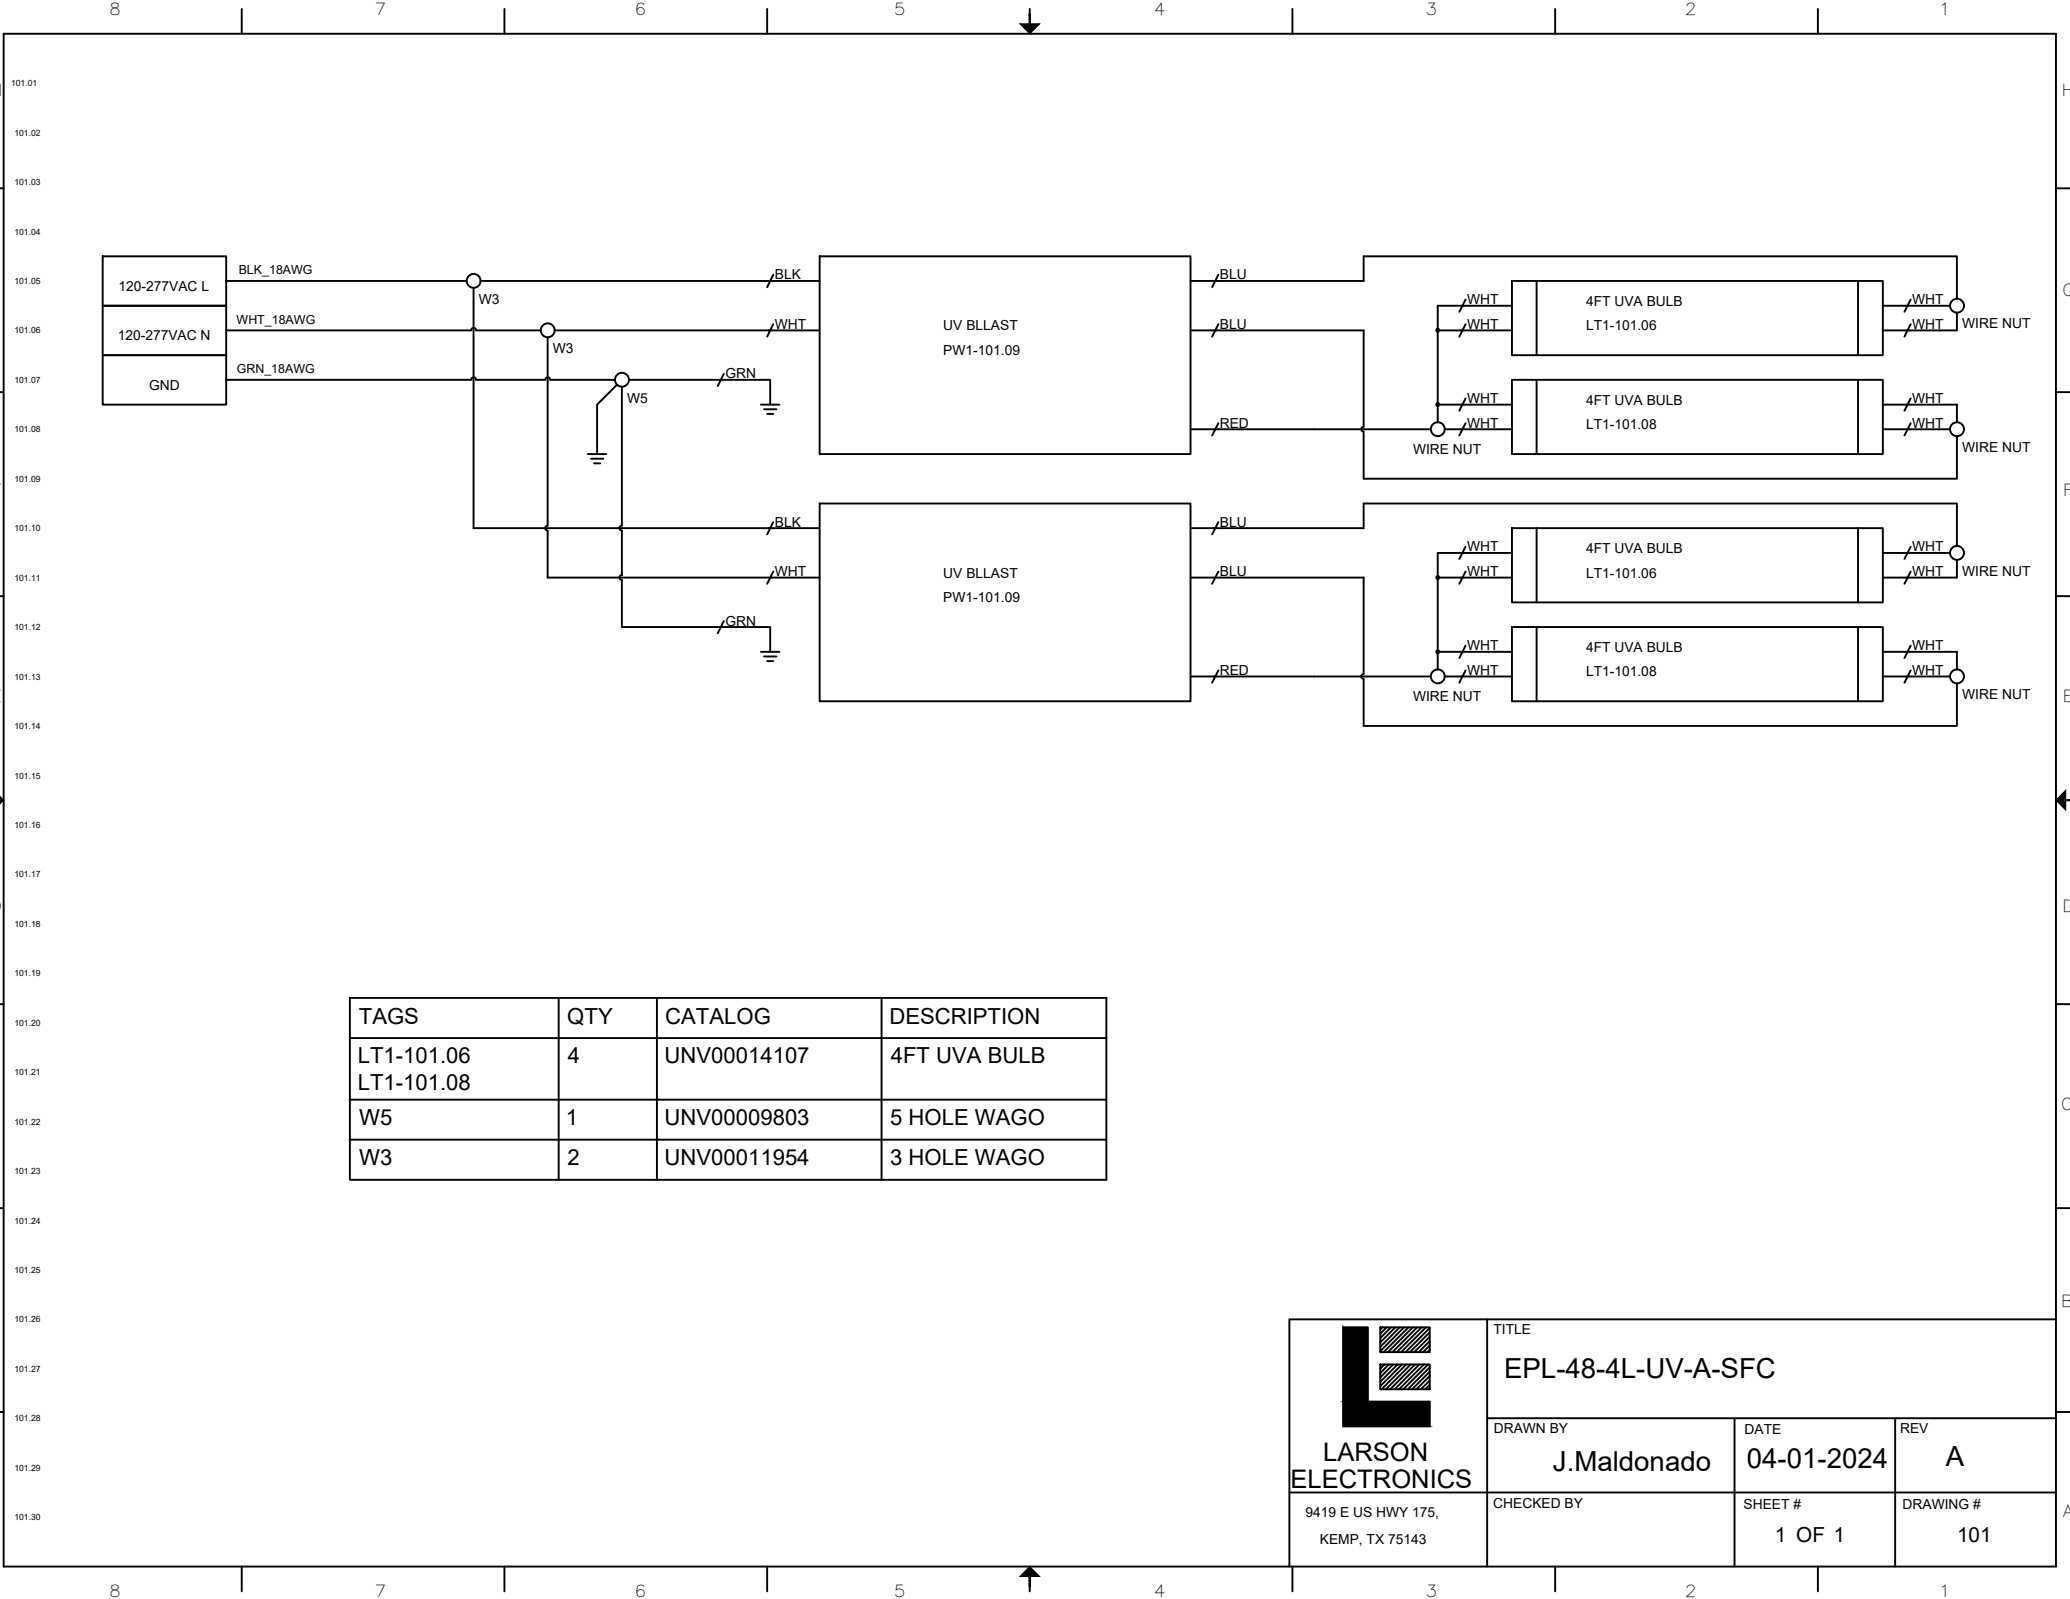



LARSON
ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE
EPL-48-4L-UV-A-SFC

DRAWN BY
J.Maldonado





CHECKED BY

DATE
04-01-2024

SHEET #
1 OF 1

REV
A





DRAWING #
101

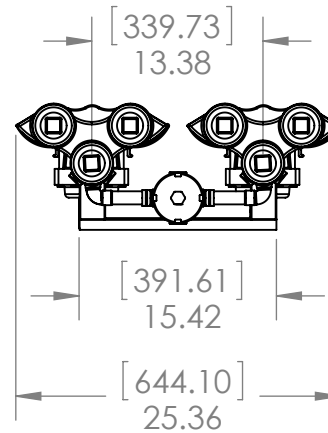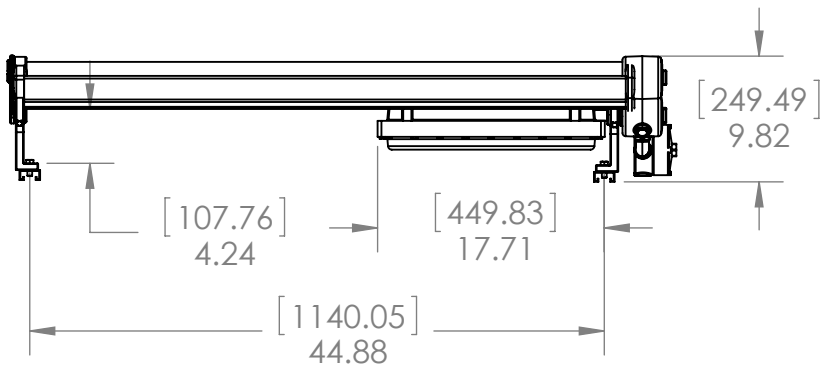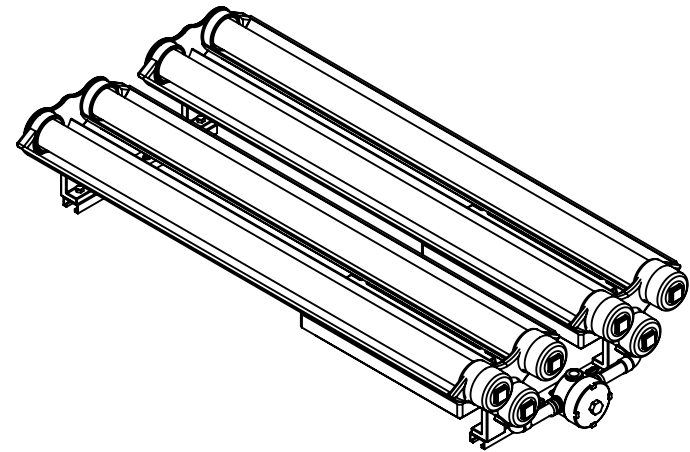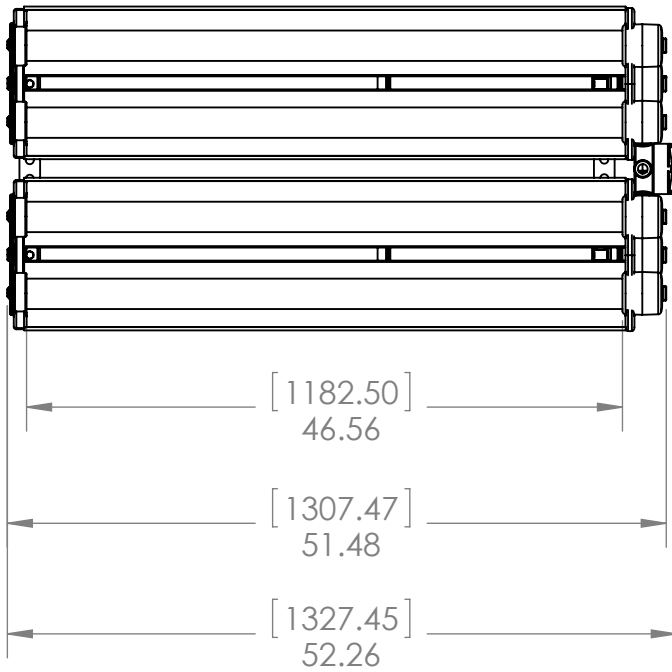

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 LARSON ELECTRONICS LLC. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 LARSON ELECTRONICS LLC IS
 PROHIBITED.

DIMENSIONS ARE IN INCHES		DRAWN		NAME	
MATERIAL		CHECKED		CHRIS THAUER	
DO NOT SCALE DRAWING				JEREMY BLANKENSHIP	

TITLE:					
EPL-48-4L-SFC					
SIZE	DWG. NO.			REV	
A					
SCALE: 1:15				SHEET 1 OF 1	

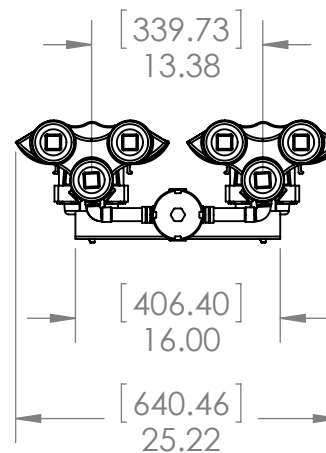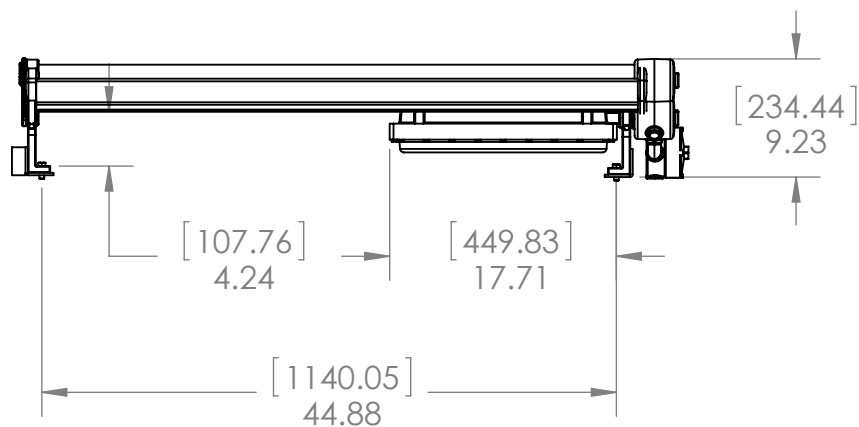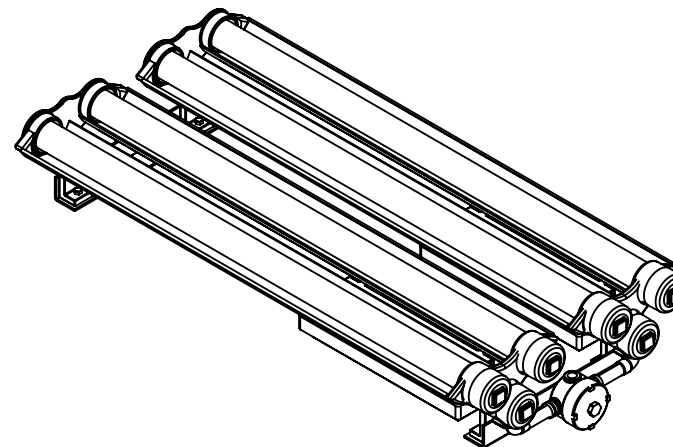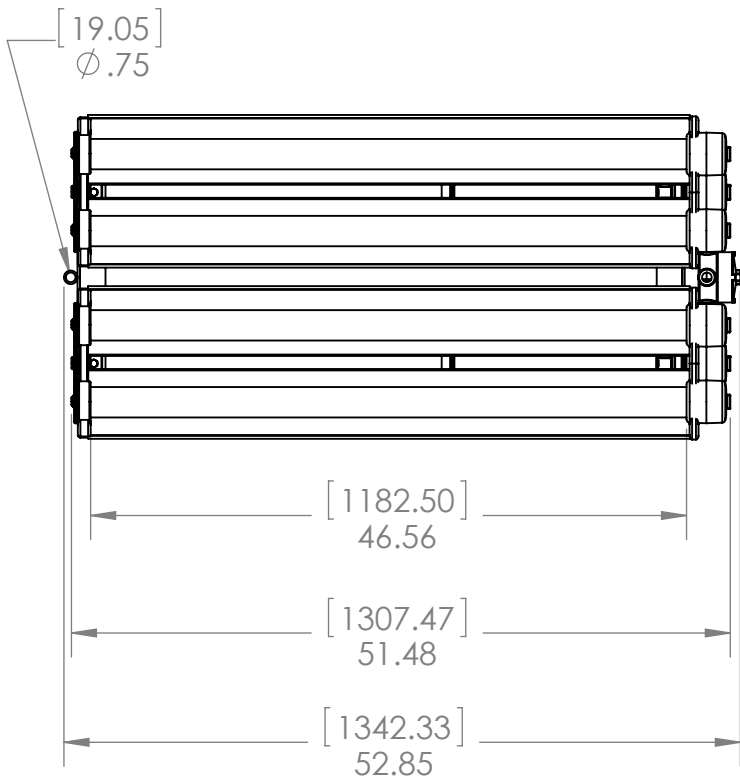

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

DIMENSIONS ARE IN INCHES		DRAWN	CHRIS THAUER
MATERIAL		CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING			

NAME

CHRIS THAUER

JEREMY BLANKENSHIP

TITLE:

EPL-48-4L-PND

SIZE
A

DWG. NO.

REV


SCALE: 1:15

SHEET 1 OF 1







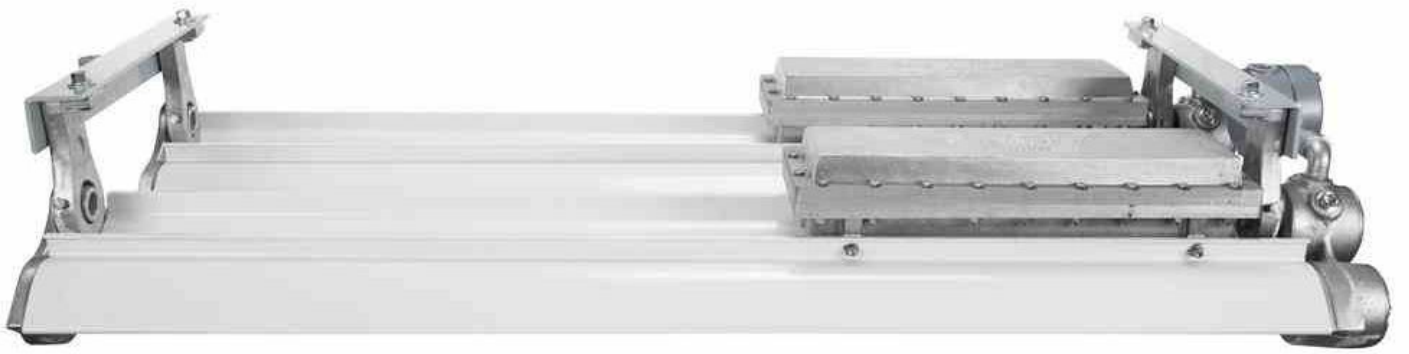



Material Safety Data Sheet

To Whom It May Concern,

The external housing and ballast contained within Larson Electronics LLC EPL, EPLC2, FTL, GAU, GVP, HAL, HALP, HALD, HAL-LI, HALS, HALSS, IND, and WAL industrial line of fluorescent lights without emergency backup for hazardous locations are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS). This document does not expire.

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

The “hazardous location” and “explosion proof” are terminology for the environment where these products will be installed. This is not to be confused with “hazardous materials;” this product does not contain any hazardous materials.

The fluorescent lamp installed within the light fixture requires a Material Safety Data Sheet (MSDS). The MSDS for fluorescent lamps are contained in the following pages. Specific MSDS depends on lamp ordered.

Regards,

Ray Smith
Larson Electronics, LLC.



Philips Lighting Company

MATERIAL SAFETY DATA SHEET

PRODUCT: ALTO™ Fluorescent T8 U-Bent Lamp (F32 T8/TL 800 Series)

Page 1 of 4

SECTION 1: MANUFACTURER

Manufacturer's Name and Address: Philips Lighting Company
A Division of Philips Electronics
North America Corporation
200 Franklin Square Drive
P.O. Box 6800
Somerset, NJ 08875

Emergency Telephone Number: (800) 424-9300 CHEMTREC
Other Information Calls: (732) 563-3197 Safety and Compliance



A division of
Philips Electronics North America Corporation

200 Franklin Square Drive
P.O. Box 6800
Somerset, NJ 08875-6800
Tel: 732.563.3000

SECTION 2: HAZARDOUS INGREDIENTS

	OSHA (PEL) mg/m ³	ACGIH (TLV) mg/m ³	% by Wt.
Phosphor Powder			
Nuisance Dust	15	10	Approx. 2.5
Cerium Terbium			
Magnesium Aluminate*	N/A	10	Approx. .25
Barium Magnesium Aluminate*	N/A	1.0	Approx. .5
Yttrium Oxide (1314-36-9)	1.0	1.0	Approx. .5
Antimony*(7440-36-0)	.5	.5	Approx
.01%			
Manganese*(7439-96-5)	.5	.2	Approx .02%
Mercury (7439-97-6)	.1	.025	< than 20
ppm			

*PEL and TLV are given for magnesium, aluminum oxide, yttrium, antimony, and manganese. Barium aluminate is not a soluble compound. Antimony and Manganese are tightly bound within the crystal matrix of the phosphor (Calcium Phosphate).

SECTION 3: CHEMICAL/PHYSICAL DATA

Not applicable. This item is a light bulb. The bulb is glass, the base is a coated aluminum. The coating is inert.

SECTION 4: FIRE AND EXPLOSION DATA

FIRE AND EXPLOSION DATA NOT APPLICABLE -- under extreme heat, glass envelope might melt or crack.

SECTION 5: REACTIVITY DATA

Stability: Lamp is stable.
Polymerization: Not applicable.
Incompatibility: Glass will react with Hydrofluoric Acid.

SECTION 6: HEALTH HAZARD DATA

Not applicable to the intact lamp. Breakage of the lamp may result in some exposure to the phosphor powder dust and to a very little amount of elemental mercury vapor. No adverse affects are expected from occasional exposure to broken lamps, but as a matter of good practice, prolonged or frequent exposure should be avoided through the use of adequate ventilation during disposal of large quantities of lamps.

EMERGENCY FIRST AID: NORMAL FIRST AID PROCEDURE FOR GLASS CUTS IF SUCH OCCUR THROUGH LAMP BREAKAGE.

SECTION 7: PRECAUTIONS FOR SAFE HANDLING AND USE

Normal precautions should be taken for the collection of broken glass.

Waste Disposal Method: At the end of rated life, when this lamp is removed from service, it will be subjected to the current Toxic Characteristic Leaching Procedure (TCLP) prescribed by the Environmental Protection Agency. This test is used to determining whether an item is a hazardous waste or a non-hazardous waste under current E. P. A. definition. Philips Lighting will provide the test data on request. This result will allow the generator to evaluate all of the disposal options, which may be available in the particular state in which the generator's facility is located. The generator should check with federal, state and local officials for their guidance. In most states ALTO lamps are considered non-hazardous subtitle D waste. Philips encourages recycling of its products by qualified recyclers.

SECTION 8: CONTROL MEASURES

Respiratory Protection: Appropriate dust mask should be used if large quantities of lamps are being broken for disposal.

Ventilation: Avoid inhalation of any airborne dust. Provide local exhaust when disposing of large quantities of lamps.

Hand and Eye Protection: Appropriate hand and eye protection should be worn when disposing of large quantities of lamps or handling broken lamps.

SECTION 9: REGULATORY ISSUES

As a product these mercury containing lamps being shipped in the manufacturer's original packaging are not regulated by air, truck or ocean shipment. As a waste, spent ALTO fluorescent lamps maybe regulated in various states and local communities. This material safety data sheet does not constitute "knowledge of the waste", in certain jurisdictions. TCLP data will be furnished upon request.

PHILIPS

SAFETY DATA SHEET

Issuing Date 04-Jan-2016

Revision Date 04-Jan-2016

Revision Number 3



The supplier identified below generated this SDS using the UL SDS template. UL did not test, certify, or approve the substance described in this SDS, and all information in this SDS was provided by the supplier or was reproduced from publically available regulatory data sources. UL makes no representations or warranties regarding the completeness or accuracy of the information in this SDS and disclaims all liability in connection with the use of this information or the substance described in this SDS. The layout, appearance and format of this SDS is © 2014 UL LLC. All rights reserved.

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Name Philips T5 Fluorescent Lamps

Other means of identification

Synonyms None

Recommended use of the chemical and restrictions on use

Recommended Use Lights, Fluorescent

Uses advised against No information available

Details of the supplier of the safety data sheet

Supplier Name Philips Consumer Lifestyle

Supplier Address 1600 Summer St
Stamford
CT
06905
US

Supplier Phone Number Phone:203-351-5000
Fax:888-466-7352
Contact Phone479-464-2829

Supplier Email David.Harris@philips.com

Emergency telephone number

2. HAZARDS IDENTIFICATION

Classification

This chemical is not considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). This product is an article which is a CFL bulb and as such does not require an MSDS per the OSHA hazard communication standard unless ruptured. The hazards indicated are for a ruptured CFL bulb.

Acute toxicity - Oral

Category 4

GHS Label elements, including precautionary statements



Emergency Overview

Signal word	Warning
Hazard Statements Harmful if swallowed	
	
This product is an article which contains a chemical substance. Safety information is given for exposure to the article as sold. Intended use of the product should not result in exposure to the chemical substance. This is a CFL bulb. In case of rupture: the above hazards exist.	
Appearance White	Physical state Solid
Odor Odorless	

Precautionary Statements - Prevention

Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product

Precautionary Statements - Response**Ingestion**

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell
Rinse mouth

Precautionary Statements - Storage

None

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Not applicable

Unknown Toxicity

96 % of the mixture consists of ingredient(s) of unknown toxicity

Other information

Causes mild skin irritation

Interactions with Other Chemicals

No information available.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical name	CAS No	Weight-%	Trade Secret
Bis[2-(diphenylphosphino)phenyl] ether	166330-10-5	1 - 5	*

*The exact percentage (concentration) of composition has been withheld as a trade secret

4. FIRST AID MEASURES

First aid measures

General Advice

First aid is upon rupture of sealed CFL bulb.

Eye contact

Rinse thoroughly with plenty of water, also under the eyelids. If symptoms persist, call a physician.

Skin contact

Wash with soap and water.

Inhalation

Remove to fresh air.

Ingestion

Do NOT induce vomiting. Rinse mouth immediately and drink plenty of water. Never give anything by mouth to an unconscious person. Call a physician.

Most important symptoms and effects, both acute and delayed

Most Important Symptoms and Effects

No information available.

Indication of any immediate medical attention and special treatment needed

Notes to Physician

Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Unsuitable extinguishing media

CAUTION: Use of water spray when fighting fire may be inefficient.

Specific hazards arising from the chemical

No information available.

Explosion Data

Sensitivity to Mechanical Impact None.

Sensitivity to Static Discharge None.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions Avoid contact with skin, eyes or clothing. Use personal protective equipment as required.

Environmental precautions

Environmental precautions See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for containment Prevent further leakage or spillage if safe to do so.

Methods for cleaning up Pick up and transfer to properly labeled containers.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling In case of rupture: Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash before reuse.

Conditions for safe storage, including any incompatibilities

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Keep out of the reach of children.

Incompatible Products None known based on information supplied.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Appropriate engineering controls

Engineering Measures Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/face protection No special protective equipment required.

Skin and body protection No special protective equipment required.

Respiratory protection

If exposure limits are exceeded or irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES**Physical and Chemical Properties**

Physical state	Solid	Odor	Odorless
Appearance	White	Odor Threshold	No information available
Color	No information available		

<u>Property</u>	<u>Values</u>	<u>Remarks</u>	<u>Method</u>
pH	No data available	None known	
Melting / freezing point	No data available	None known	
Boiling point / boiling range	No data available	None known	
Flash Point	No data available	None known	
Evaporation Rate	No data available	None known	
Flammability (solid, gas)	No data available	None known	
Flammability Limit in Air			
Upper flammability limit	No data available		
Lower flammability limit	No data available		
Vapor pressure	No data available	None known	
Vapor density	No data available	None known	
Specific Gravity	No data available	None known	
Water Solubility	incompatible	None known	
Solubility in other solvents	No data available	None known	
Partition coefficient: n-octanol/water	No data available	None known	
Autoignition temperature	No data available	None known	
Decomposition temperature	No data available	None known	
Kinematic viscosity	No data available	None known	
Dynamic viscosity	No data available	None known	
Explosive properties	No data available		
Oxidizing properties	No data available		

Other Information

Softening Point	No data available
VOC Content (%)	No data available
Particle Size	No data available
Particle Size Distribution	

10. STABILITY AND REACTIVITY

Reactivity

No data available.

Chemical stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Conditions to avoid

None known based on information supplied.

Incompatible materials

None known based on information supplied.

Hazardous Decomposition Products

None known based on information supplied.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

Product does not present an acute toxicity hazard based on known or supplied information. In case of rupture:.

Inhalation

Specific test data for the substance or mixture is not available.

Eye contact

Specific test data for the substance or mixture is not available.

Skin contact

Specific test data for the substance or mixture is not available.

Ingestion

Specific test data for the substance or mixture is not available. Harmful if swallowed. (based on components).

Component Information

No information available

Information on toxicological effects

Symptoms

No information available.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Sensitization

No information available.

Mutagenic Effects

No information available.

Carcinogenicity

Contains no ingredient listed as a carcinogen.

Reproductive toxicity

No information available.

STOT - single exposure

No information available.

STOT - repeated exposure

No information available.

Target Organ Effects

None known.

Aspiration Hazard No information available.

Numerical measures of toxicity Product Information

The following values are calculated based on chapter 3.1 of the GHS document

ATEmix (oral)

500.00 mg/kg

12. ECOLOGICAL INFORMATION

Ecotoxicity

The environmental impact of this product has not been fully investigated.

Persistence and Degradability

No information available.

Bioaccumulation

No information available

Other adverse effects

No information available.

13. DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal methods This material, as supplied, is a hazardous waste according to federal regulations (40 CFR 261).

Contaminated Packaging Dispose of contents/containers in accordance with local regulations.

US EPA Waste Number D009

California Hazardous Waste Codes M003

14. TRANSPORT INFORMATION

DOT
Proper Shipping Name NOT REGULATED
Hazard Class NON REGULATED
N/A

TDG Not regulated

MEX Not regulated

ICAO Not regulated

IATA
Proper Shipping Name Not regulated
Hazard Class NON REGULATED
N/A

IMDG/IMO	Not regulated
Hazard Class	N/A
Marine Pollutant	Product is a marine pollutant according to the criteria set by IMDG/IMO This product contains a chemical which is listed as a severe marine pollutant according to IMDG/IMO
RID	Not regulated
ADR	Not regulated
ADN	Not regulated

15. REGULATORY INFORMATION

International Inventories

TSCA	Complies
DSL	All components are listed either on the DSL or NDSL.

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory
 DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

SARA 311/312 Hazard Categories

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden release of pressure hazard	No
Reactive Hazard	No

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material

US State Regulations

California Proposition 65

This product contains the following Proposition 65 chemicals.

Chemical name	California Proposition 65
Mercury - 7439-97-6	Developmental

U.S. State Right-to-Know Regulations

Chemical name	New Jersey	Massachusetts	Pennsylvania	Rhode Island	Illinois
Mercury 7439-97-6	X	X	X	X	X

International Regulations



Canada
WHMIS Hazard Class
Non-controlled

16. OTHER INFORMATION

NFPA	Health Hazards 1	Flammability 0	Instability 0	Physical and Chemical Hazards -
HMIS	Health Hazards 0	Flammability 0	Physical Hazard 0	Personal Protection X

Prepared By Product Stewardship
23 British American Blvd.
Latham, NY 12110
1-800-572-6501

Issuing Date 04-Jan-2016
Revision Date 04-Jan-2016
Revision Note No information available

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of Safety Data Sheet



Philips Lighting Company

MATERIAL SAFETY DATA SHEET

PRODUCT: T-5 Silhouette Standard and HO

Revised: 8/02

SECTION 1: MANUFACTURER

Manufacturer's Name and Address: Philips Lighting Company
A Division of Philips Electronics
North America Corporation
200 Franklin Square Drive
PO Box 6800
Somerset, NJ 08875

Emergency Telephone Number: (800) 424-9300 CHEMTREC
(732) 563-3197 Safety and Compliance
Other Information Calls: (732) 563-3089



A division of
Philips Electronics North America Corporation

200 Franklin Square Drive
P.O. Box 6800
Somerset, NJ 08875-6800
Tel: 732.563.3000

SECTION 2: HAZARDOUS INGREDIENTS

	OSHA PEL	ACGIH	PERCENTAGE
Phosphor Powder			
Nuisance dust	15 mg/m3	10mg/m3	approx. 2.5%
Yttrium Oxide: Europium (68585-82-0)	1mg/m3	1mg/m3	approx. .8%
Barium Carbonate (0513-77-9)	0.5mg/m3	0.5mg/m3	approx. .3%
Manganese Carbonate (598-62-9)	5.0mg/m3	5.0 mg/m3	approx. .3%
Aluminum Oxide (1344-28-1)	15 mg/m3	10 mg/m3	approx. .3%
Cerium Oxide			approx. .2%
Gadolinium Oxide			approx. .2%
Terbium Oxide (12036-41-8)			approx. .2%
Magnesium Oxide (1309-48-4)	15mg/m3	10mg/3	approx. .2%
Boric Oxide (1303-86-2)	10mg/m3	10mg/m3	approx. .2%
Mercury (7439-97-6)	.1mg/m3	.025mg/m3	less than .01%

These materials are essentially ceramic phosphors (except for the mercury). The ceramics are Barium Aluminate<Yttrium Oxide and a Cerium Terbium Borate mixture. The PELs and TLV are given where available for the base components. There is no data on the ceramic mixtures as mixtures.

SECTION 3: PHYSICAL CHEMICAL CHARACTERISTICS

Not applicable. These items are light bulbs with 5/8 inch diameter and various lengths up to a nominal five feet (lengths are actually metric).

SECTION 4: FIRE AND EXPLOSION DATA

Fire and explosion data not applicable. Under extreme heat glass envelope might melt or crack.

SECTION 5: REACTIVITY DATA

Stability:	Lamp is stable
Incompatibility:	Glass will react with Hydrofluoric Acid
Polymerization:	Not applicable

SECTION 6: HEALTH EFFECTS

Not applicable for the intact lamp. Breakage of the lamp may result in some exposure to the phosphor powder dust/and to elemental mercury vapor. No adverse affects are expected from occasional exposure to broken lamps, but as a matter of good practice, prolonged or frequent exposure should be avoided through the use of adequate ventilation during disposal of large quantities of lamps.

Emergency and First Aid Procedure: Normal first aid procedure for glass cuts if such occur through lamp breakage.

SECTION 7: PRECAUTIONS FOR SAFE HANDLING AND USE

Normal precautions should be taken for the collection of broken glass.

Waste Disposal Method: At the end of rated life, when this lamp is removed from service, it will be subjected to the current Toxic Characteristic Leaching Procedure (TCLP) prescribed by the Environmental Protection Agency. This test is used to determining whether an item is a hazardous waste or a non-hazardous waste under current E. P. A. definition. These lamps would fail the TCLP test and would be considered hazardous under the Universal Waste Rules. Generators should evaluate all of the disposal options, which may be available in the particular state in which the generator's facility is located. The generator should check with federal, state and local officials for their guidance. Philips encourages recycling of its products by qualified recyclers.

SECTION 8: CONTROL MEASURES

Respiratory Protection: None. NIOSH-approved respirator might be used if large volumes of lamps are being broken for disposal.

Ventilation: Avoid inhalation of any airborne dust.
Provide local exhaust when disposing large quantities of lamps.

Hand and Eye Protection: Appropriate hand and eye protection should be worn when disposing of lamps or handling broken glass.

SECTION 9: REGULATORY INFORMATION

As a product these mercury containing lamps being shipped in the manufacturer's original packaging are not regulated by air, truck or ocean shipment. As a waste, these spent fluorescent lamps would be regulated in various states and local communities. This material safety data sheet does not constitute "knowledge of the waste", in certain jurisdictions.

PHILIPS

Lamp Material Data Sheet (LMDS)

LMDS #: TL12-13100A

Date: 12/31/2015

Product: Philips T12 Fluorescent Lamps – All Types

All ALTO, non-ALTO, Standard, HO, Circular, U-Bent and TuffGuard
All lengths, coatings, wattages

Page 1 of 2

Section 1. Manufacturer and Contact Information

Philips Lighting North America Corporation

200 Franklin Square Drive
Somerset, NJ 08873-4186

24 HR Emergency Phone Number: (800) 424-9300 CHEMTREC

Other Information Calls: (800) 555-0050 Philips Lighting Technical Information

Section 2. Hazardous Ingredients/Identity Information

These lamps contain the following materials:

Exposure Limits

Material	(CAS #)	OSHA PEL mg/m ³	ACGIH TLV mg/m ³	PERCENTAGE by weight
Glass	(65997-17-3)	15	10	~96.0%
Phosphor Powder As Nuisance Dust		15	10	~2.5%
Mercury	(7439-97-6)	0.1	0.025	~0.01%
Polyethylene Terephthalate (PET)	(25038-59-9)	-	-	~3.0%

Phosphor powders are ceramic phosphors. There is no data for the ceramics as mixtures. PET sleeving is applied to TuffGuard versions of the lamps to retain materials in the event of lamp breakage.

Section 3. Physical Properties

Not applicable to an intact lamp. These items are light bulbs 1 1/2 inch in diameter and range from 12 to 96 inches in length.

Section 4. Fire and Explosion Hazards

Not applicable to an intact lamp. If subjected to extreme heat, the glass, and plastic (if present), components of the lamp may crack or melt and may emit toxic fumes. Use extinguishing media appropriate for combustibles in the area.

Section 5. Reactivity

Not applicable to an intact lamp.

Section 6. Health Hazards

Not applicable to an intact lamp. Breakage of the lamp may result in some exposure to the phosphor powder and to elemental mercury. No adverse effects are expected from occasional exposure to broken lamps, but as a matter of good practice, prolonged exposure should be avoided through the use of adequate ventilation during the disposal of large quantities of lamps.

Guidance on cleaning up a broken lamp can be obtained from <http://www2.epa.gov/cfl/cleaning-broken-cfl>.

Emergency and First Aid Procedures: Apply normal first aid for glass cuts if such should occur through lamp breakage.

Section 7. Lamp Disposal Procedures

Normal precautions should be taken for the collection of glass particles in the event a lamp is broken.

Waste Disposal Method: All fluorescent lamps contain some amount of mercury. When a fluorescent lamp is to be disposed, it is subject to the current EPA Toxicity Characteristic Leaching Procedure (TCLP) disposal criteria. This test is used to determine if an item can be managed as hazardous or non-hazardous waste.

Philips low-mercury ALTO fluorescent lamps are identifiable by their characteristic green end caps. Philips ALTO lamps are TCLP compliant and can be managed as non-hazardous waste. Philips will provide TCLP test data upon request.

Philips non-ALTO lamps (with silver end caps) are not TCLP compliant and should be managed as a hazardous waste under the EPA Universal Waste Rules for fluorescent lamps.

All disposal options should be evaluated with respect to federal, state, and local requirements. Before disposing of waste lamps, check with federal, state, and/or local officials for current guidelines and regulations. Philips encourages recycling of its products through qualified recycling facilities.

Section 8. Control Measures

Respiratory Protection: None. NIOSH-approved respirator should be used if large quantities of lamps are being broken for disposal.

Ventilation: Avoid inhalation of any airborne dust. Provide local exhaust when disposing of large quantities of lamps.

Hand and Eye Protection: Appropriate hand and eye protection should be worn when disposing of lamps and/or handling broken glass.

Section 9. Regulatory Information

As a product, these mercury-containing lamps, when shipped in the manufacturer's original packaging, are not regulated by air, truck, or ocean shipment. As a waste, these lamps may be regulated in various states and local communities. This safety data sheet does not constitute "knowledge of the waste" in certain jurisdictions.

This document supercedes previous document: LMDS TL12-13100 issued 07/10/2013


[<- Back](#)

Product Description

Title: ELECTRIC LIGHTING FIXTURES FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light., EPL.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, AL-12-IPS-LED-1224DC, HAL-24-IPS-LED-1224DC, HAL-36-IPS-LED-1224DC, HAL-48-IPS-LED-1224DC; followed by -UVA, -UVB, -UVC, -IR, -C, -VISUV, -VISIR, -VISRED, -VISBLU, -VISGRN, -VISAMB, -27K, -30K, -40K, -45K, -50K, -55K, -56K, -60K, -65K, -DAYLIGHT, -750NM, -770NM, -850NM, -940NM, -1550NM, -RED, -BLU, -GRN, -AMB, or -PRPL.

LED Fixed Lighting suitable for used in Class I, Division 1, Groups C, D. Class I, Division 2, Groups A, B, C & D, T6, -25°C to +40°C., Model Nos. EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC. LED Fixed Lighting suitable for used in Class I Division 1 Group B C and D, Class I Division 2 Group A B C and D, Class II Division 1 Group E F and G, Class II Division 2 Group F and G and Class III hazardous locations, T6, -25°C to +40°C., Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

Luminaires, Model Nos. HAL; followed by 24 or 48; followed by 2L; followed by T8, T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations: Class I, Div. 2, Groups A, B, C and D -20°C < Tamb < 40°C, T5.

Luminaires, Model Nos. HALSS; followed by EM; followed by 48; followed by 2L; followed by LED. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: 0°C < Tamb < 40°C, T4.

Luminaires, Model Nos. HALS; followed by 48; followed by 2L, 4L or 6L; followed by T8, T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D Class II Division 2, Groups F and G -20°C < Tamb < 40°C, T3A, T3B, T3C, T5 or T6.

Luminaires, Model Nos. HALSS; followed by 48; followed by 2L; followed by LED, LEDT8, 26 or 46; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: -20°C < Tamb < 40°C IR2-4-2-26: T6 IR2-4-2-46: T3C IR2-4-2-LEDT8 and IR2-4-2-LED: T4.

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

Luminaires, Model Nos. HALP; followed by EM; followed by 24 or 48; followed by 2L; followed by T8,T5HO,LED or LEDT8. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: 0°C < Tamb < 40°C, T4.

Luminaires, Model Nos. HAL; followed by EM; followed by 24 or 48; followed by 2L; followed by T8,T5HO,T12,T12HO, LEDT8 or LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: 0°C < Tamb < 40°C, T4.

Luminaires, Model Nos. EPL; followed by EM; followed by 24 or 48; followed by 2L; followed by T8,T5HO,T12,T12HO, LEDT8 or LED; followed by SFC. For use in: Hazardous Locations Class I, Division 1, Groups C and D, Class II, Division 1, Groups E, F, G, Class III.

LED Luminaire for use in Class I, Division 1&2, Groups C&D, T5 Hazardous Location, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Luminaires, Model Nos. HAL-48-1L-LED-BMSW, HAL-48-2L-LED-BMSW, HAL-48-3L-LED-BMSW, HAL-24-1L-LED-BMSW, HAL-24-2L-LED-BMSW, HAL-24-3L-LED-BMSW. For use in Hazardous Locations, Class I, Division 2, Groups A, B, C and D; T3C, T4A or T5 -20°C < Tamb < 40°C.

Luminaires, EPL, Model Nos. EPL-24-2L-T8-SFC, EPL-24-2L-T5-SFC, EPL-48-2L-T8-SFC, EPL-48-2L-T5HO-SFC, EPL-48-4L-T8-SFC, EPL48-4L-T5HO, EPL-24-216-SFC, EPL-48-216-SFC. For use in: Hazardous Locations Class I, Division 1, Groups C and D, T5, T6 Class II, Division 1, Groups E, F, and G, T3B Class III

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Luminaires, Model Nos. HALP; followed by 24 or 48; followed by 2L or 3L; followed by LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: Luminaires with "LEDT8" suffix: T4 -20°C < Tamb < 55°C Luminaires with "LED" suffix: T4 -20°C < Tamb < 40°C.

Evaluated to the following:

A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Lighting Fixtures for Use in Hazardous (Classified) Locations (UL-844) and are identified with the ETL Listed Mark.

[<- Back](#)


[<- Back](#)

Product Description

Title: LUMINAIRES

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light, EPL.

Fixed Luminaires, Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT, EPL-EMG-LB-100LED-RT, EPL-EMG-LB-150LED-RT, EPL-EMG-LB-200LED-RT.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

Luminaires, Model Nos. HAL; followed by 24 of 48; followed by 2L; followed by T8,T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations: Class I, Div. 2, Groups A, B, C and D -20°C < Tamb < 40°C, T5.

Luminaires, Model Nos. HALS; followed by 48; followed by 2L, 4L or 6L; followed by T8,T5HO,LED or LEDT8; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D Class II Division 2, Groups F and G -20°C < Tamb < 40°C, T3A, T3B, T3C, T5 or T6.

Luminaires, Model Nos. HALSS; followed by 48; followed by 2L; followed by LED, LEDT8,26 or 46; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: -20°C < Tamb < 40°C IR2-4-2-26: T6 IR2-4-2-46: T3C IR2-4-2-LEDT8 and IR2-4-2-LED: T4.

Luminaires, Model Nos. HAL-48-1L-LED-BMSW, HAL-48-2L-LED-BMSW, HAL-48-3L-LED-BMSW, HAL-24-1L-LED-BMSW, HAL-24-2L-LED-BMSW, HAL-24-3L-LED-BMSW. For use in Hazardous Locations, Class I, Division 2, Groups A, B, C and D; T3C, T4A or T5 -20°C < Tamb < 40°C.

Luminaires, EPL, Model Nos. EPL-24-2L-T8-SFC, EPL-24-2L-T5-SFC, EPL-48-2L-T8-SFC, EPL-48-2L-T5HO-SFC, EPL-48-4L-T8-SFC, EPL48-4L-T5HO, EPL-24-216-SFC, EPL-48-216-SFC. For use in: Hazardous Locations Class I, Division 1, Groups C and D, T5, T6 Class II, Division 1, Groups E, F, and G, T3B Class III

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

-20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1
T3B -20°C < Tamb < 40°C

Luminaires, Model Nos. HALP; followed by 24 of 48; followed by 2L or 3L; followed by LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: Luminaires with "LEDT8" suffix: T4 -20°C < Tamb < 55°C Luminaires with "LED" suffix: T4 -20°C < Tamb < 40°C.

Surface-mounted Luminaire, Model Nos. EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC.

Wall mounted luminaire, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Evaluated to the following:

A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (UL-1598) and are identified with the ETL Listed Mark.

[<- Back](#)

[<- Back](#)

Product Description

Title: LUMINAIRES - MARINE VESSELS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): EPL.

Luminaires, Model Nos. HAL; followed by 24 of 48; followed by 2L; followed by T8,T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations: Class I, Div. 2, Groups A, B, C and D -20°C < Tamb < 40°C, T5.

Luminaires, Model Nos. HALP; followed by EM; followed by 24 or 48; followed by 2L; followed by T8,T5HO,LED or LEDT8. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: 0°C < Tamb < 40°C, T4.

Luminaires, Model Nos. HAL; followed by EM; followed by 24 or 48; followed by 2L; followed by T8,T5HO,T12,T12HO, LEDT8 or LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: 0°C < Tamb < 40°C, T4.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. For use in: Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C.

Luminaires, EPL, Model Nos. EPL-24-2L-T8-SFC, EPL-24-2L-T5-SFC, EPL-48-2L-T8- SFC, EPL-48-2L-T5HO-SFC, EPL-48-4L-T8-SFC, EPL48-4L-T5HO, EPL-24-216-SFC, EPL-48-216-SFC. For use in: Hazardous Locations Class I, Division 1, Groups C and D, T5, T6 Class II, Division 1, Groups E, F, and G, T3B Class III.

Luminaires, Model Nos. HALP; followed by 24 of 48; followed by 2L or 3L; followed by LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: Luminaires with "LEDT8" suffix: T4 -20°C < Tamb < 55°C Luminaires with "LED" suffix: T4 -20°C < Tamb < 40°C.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Supplemental Requirements for Luminaires for Installation on Marine Vessels (UL-1598A) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)


[<- Back](#)

Product Description

Title: ELECTRIC LUMINAIRES FOR USE IN HAZARDOUS LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-12-IPS-LED-1224DC, HAL-24-IPS-LED-1224DC, HAL-36-IPS-LED-1224DC, HAL-48-IPS-LED-1224DC; followed by -UVA, -UVB, -UVC, -IR, -C, -VISUV, -VISIR, -VISRED, -VISBLU, -VISGRN, -VISAMB, -27K, -30K, -40K, -45K, -50K, -55K, -56K, -60K, -65K, -DAYLIGHT, -750NM, -770NM, -850NM, -940NM, -1550NM, -RED, -BLU, -GRN, -AMB, or -PRPL.

LED Fixed Lighting suitable for used in Class I, Division 1, Groups C, D. Class I, Division 2, Groups A, B, C & D, T6, -25°C to +40°C., Model Nos. EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC. LED Fixed Lighting suitable for used in Class I Division 1 Group B C and D, Class I Division 2 Group A B C and D, Class II Division 1 Group E F and G, Class II Division 2 Group F and G and Class III hazardous locations, T6, -25°C to +40°C., Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

LED Luminaire for use in Class I, Division 1&2, Groups C&D, T5 Hazardous Location, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Luminaires, Model Nos. HAL; followed by 24 or 48; followed by 2L; followed by T8, T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations: Class I, Div. 2, Groups A, B, C and D -20°C < Tamb < 40°C, T5.

Luminaires, Model Nos. EPL; followed by EM; followed by 24 or 48; followed by 2L; followed by T8, T5HO, T12, T12HO, LEDT8 or LED; followed by SFC. For use in: Hazardous Locations Class I, Division 1, Groups C and D, Class II, Division 1, Groups E, F, G, Class III.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.

Americas+1-888-347-5478
(or +1-847-660-7407)

Email

etldirectory@intertek.com

[Intertek Home](#)

[Product Directories](#)

[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6
-20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1
T3B -20°C < Tamb < 40°C.

Luminaires, Model Nos. HALP; followed by 24 of 48; followed by 2L or
3L; followed by LED; followed by SFC. For use in: Hazardous Locations
Class I, Division 2, Groups A, B, C and D: Luminaires with "LEDT8"
suffix: T4 -20°C < Tamb < 55°C Luminaires with "LED" suffix: T4 -20°C <
Tamb < 40°C.

**Evaluated to the
following:**

A representative sample of the listed devices have been tested,
investigated and found to comply with the requirements of the
Standard(s) for Electric Luminaries for Use in Hazardous Locations
(CAN/CSA-C22.2 No. 137) and are identified with the cETL Listed
Mark.

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.


[<- Back](#)

Product Description

Title: LUMINAIRES

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

Fixed Luminaires, Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT, EPL-EMG-LB-100LED-RT, EPL-EMG-LB-150LED-RT, EPL-EMG-LB-200LED-RT.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

Luminaires, Model Nos. HAL; followed by 24 of 48; followed by 2L; followed by T8, T5HO, LED or LEDT8; followed by SFC. For use in: Hazardous Locations: Class I, Div. 2, Groups A, B, C and D -20°C < Tamb < 40°C, T5.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Luminaires, Model Nos. HALP; followed by 24 of 48; followed by 2L or 3L; followed by LED; followed by SFC. For use in: Hazardous Locations Class I, Division 2, Groups A, B, C and D: Luminaires with "LEDT8" suffix: T4 -20°C < Tamb < 55°C Luminaires with "LED" suffix: T4 -20°C < Tamb < 40°C.

Surface-mounted Luminaire, Model Nos. EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC.

Wall mounted luminaire, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

Evaluated to the following:

A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.; A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: EPL-48 series, EPL-24 series w/ LED Lamps
Description: Explosion Proof LED Light

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The EPL-48 series, EPL-24 series w/ LED Lamps complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: EPL-48 series, EPL-24 series w/ LED Lamps
Description: Explosion Proof LED Light

Evaluated Listings:

CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: EPL-48 series, EPL-24 series w/ LED Lamps
Description: Explosion Proof LED Light

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union ("EU") Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances ("REACH").

REACH does not apply to manufactured products which are referred to as "completed articles". Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature:

Name: James Thomas
Position: Operations Manager

Frequently Asked Questions (FAQ)